

DESSO

# The Foundation 2023


CARPET COLLECTION



Tarkett

# Table of Contents

|   |            |
|---|------------|
| <b>About Tarkett</b>                        | <b>5</b>   |
| Tarkett company profile                     | 5          |
| Tarkett Human Conscious Design®             | 7          |
| <b>Our Fundamentals</b>                     | <b>9</b>   |
| Innovation Strategy                         | 10         |
| Creativity   Functionality   Sustainability | 11         |
| <br>Creativity                              |            |
| Circles of Architects®                      | 13         |
| Carpet design centre                        | 14         |
| Carpet design centre collections            | 15         |
| 3D Textures                                 | 17         |
| <br>Functionality                           |            |
| DESSO AirMaster®                            | 18         |
| DESSO SoundMaster®                          | 24         |
| TarkettTAPE™                                | 26         |
| <br>Sustainability                          |            |
| Doing More With Less                        | 28         |
| Our Circular Carbon Footprint               | 30         |
| Circularity. Together.                      | 31         |
| ReStart®                                    | 32         |
| DESSO EcoBase®                              | 34         |
| Material Transparency                       | 36         |
| Environmental product declarations (EPD'S)  | 37         |
| Material Health Statements (MHS's)          | 37         |
| Green Building Schemes                      | 38         |
| DESSO® carpet and the environment           | 40         |
| <br><b>Index</b>                            | <b>43</b>  |
| <b>Carpet Tiles</b>                         | <b>45</b>  |
| <b>Broadloom &amp; Rugs</b>                 | <b>177</b> |
| <b>Custom Made</b>                          | <b>213</b> |
| <b>Appendix</b>                             | <b>219</b> |

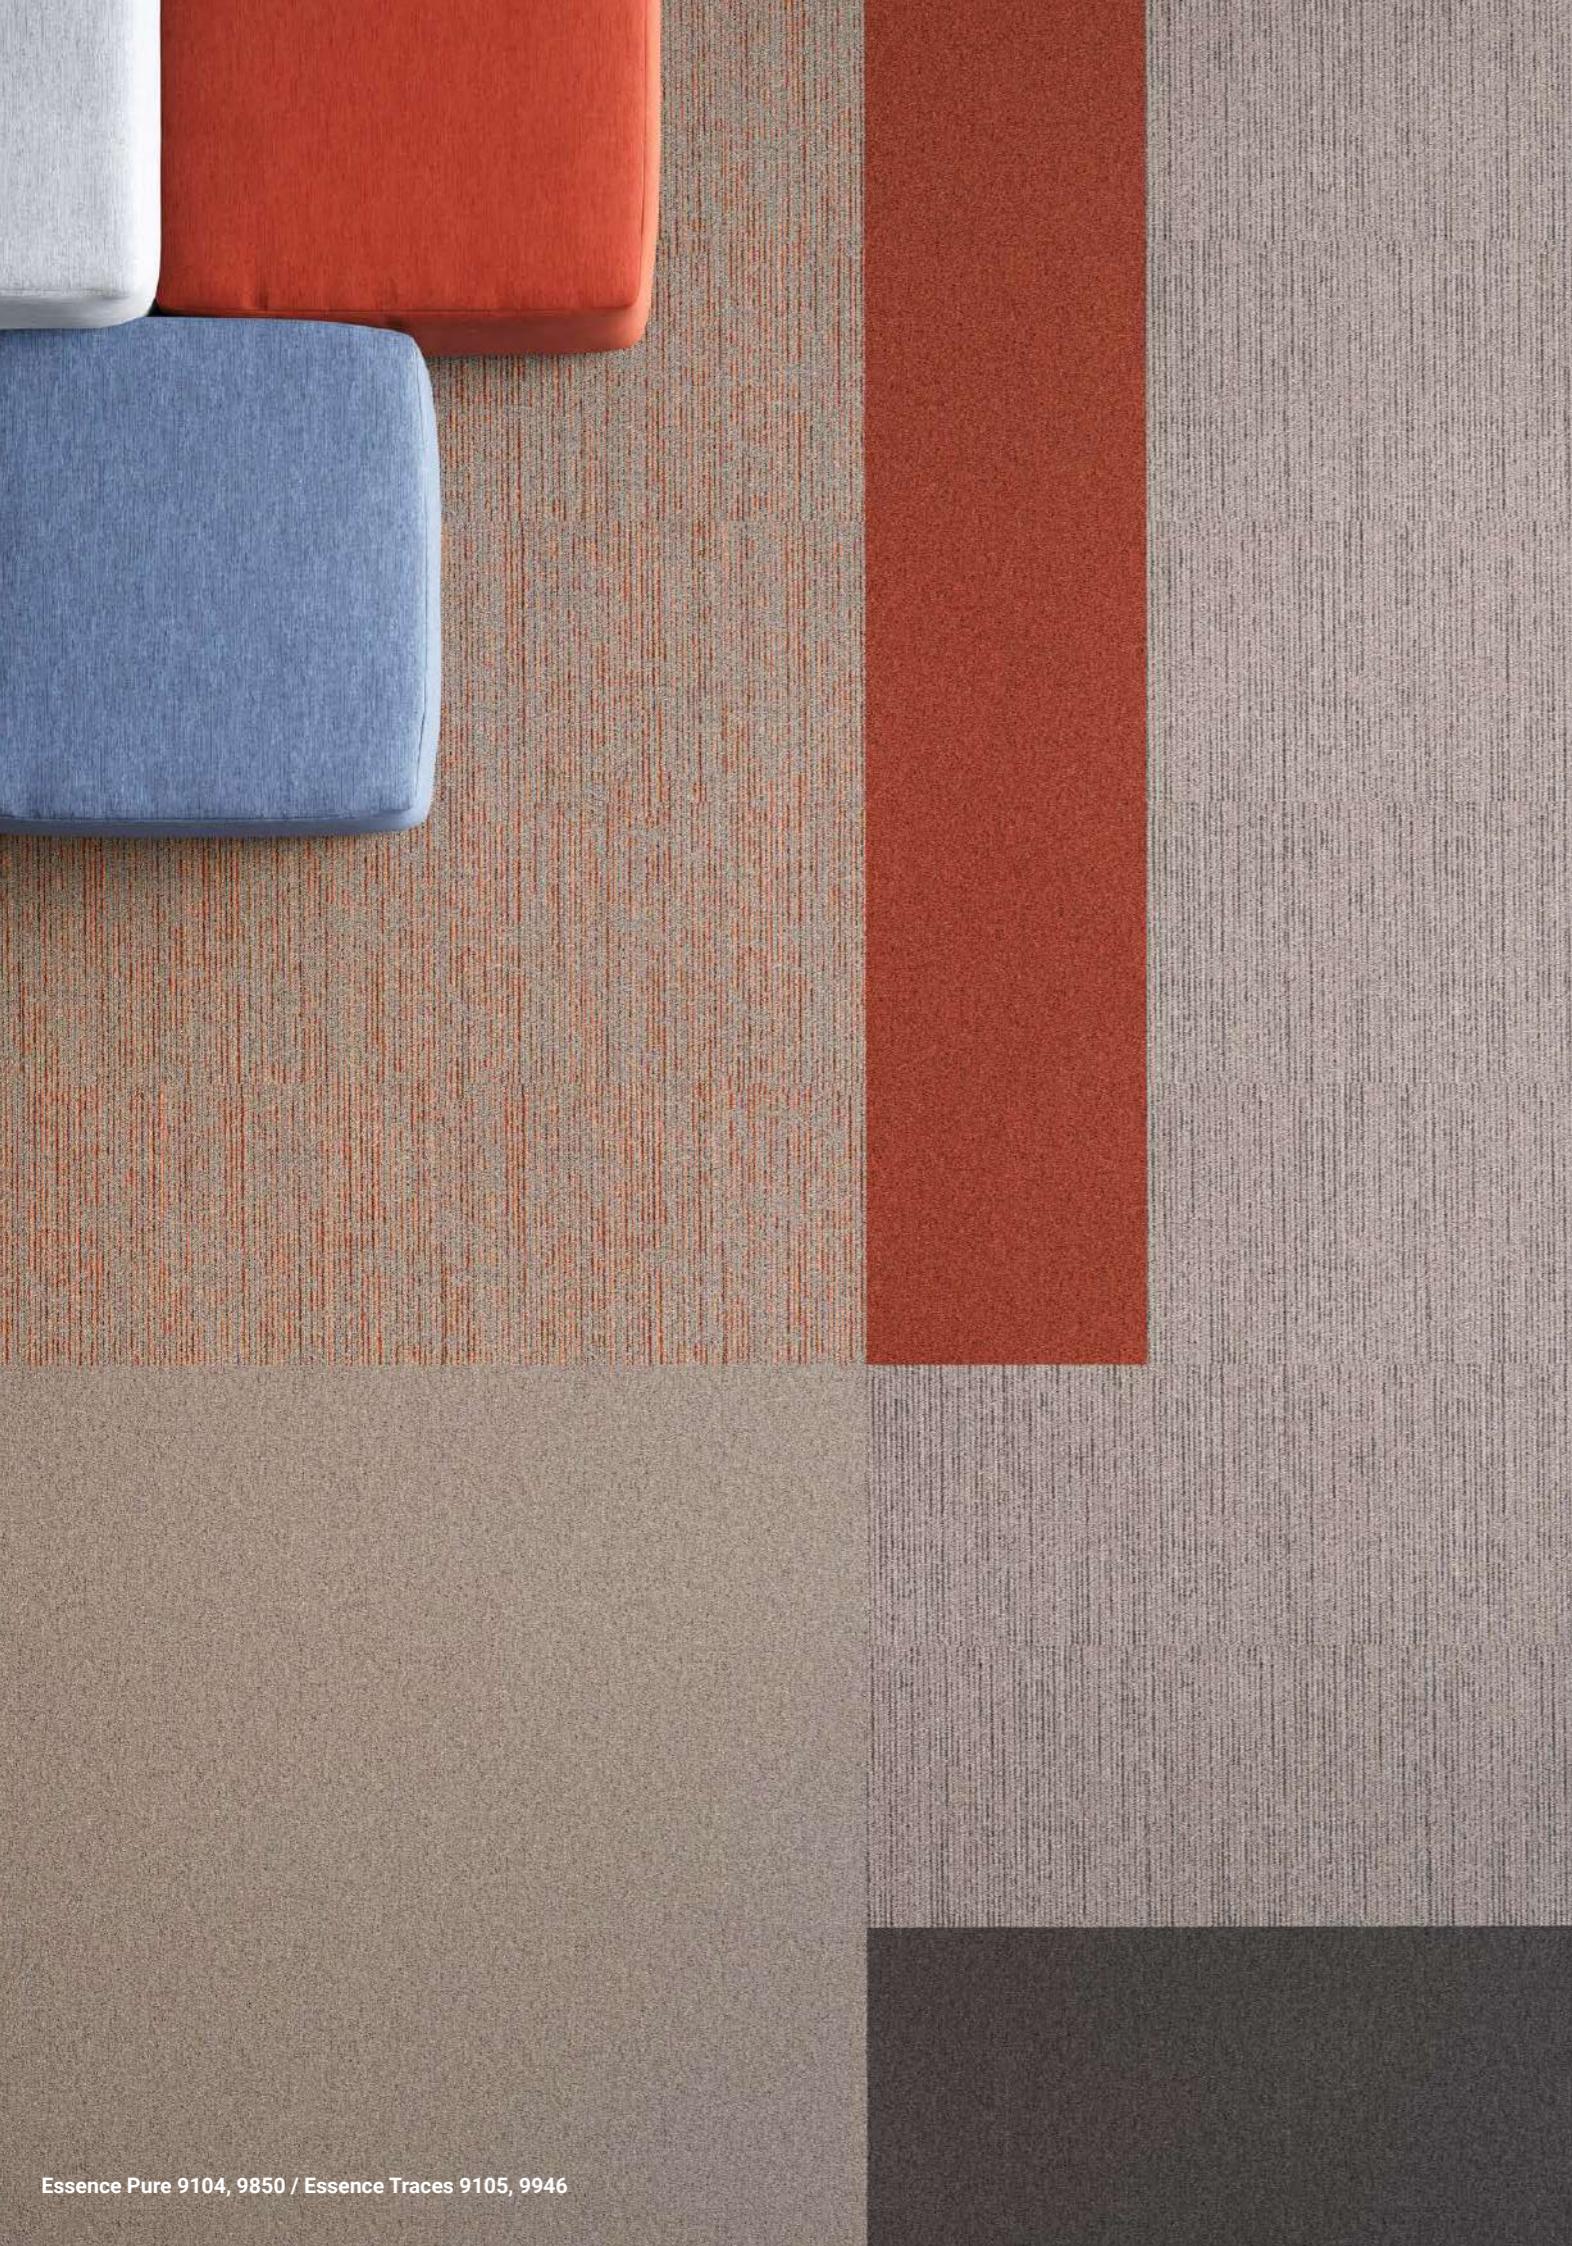

# About Tarkett



Tarkett is a global leader in flooring and sports surfaces with a commitment to Human-Conscious Design® – to stand with present and future generations and create products and services that are good for people and for the planet. And to do it every day.

DESSO, part of the Tarkett group, is a leading carpet tiles brand with more than 85 years of experience in manufacturing high-end, innovative carpet solutions

**DESSO**


# Tarkett Human-Conscious Design®



Tarkett Human-Conscious Design® is our pledge to stand with present and future generations. To create flooring and sports surfaces that are good for people and for the planet. And to do it every day.

We deliver on this through the synergy of three commitments:

- 1 Deep human understanding
- 2 Conscious choices. For people and planet
- 3 With you. Every step of the way



# Our Fundamentals



# Innovation Strategy



Creativity,  
Functionality and  
Sustainability.

All DESSO carpets are characterized by the synergy of the three pillars:  
**Creativity, Functionality and Sustainability.**

Due to our many years of experience as a manufacturer of carpets (over 85 years) and our specialization in modular carpeting (over 50 years) we can offer expertise, flexibility in production and supply, as well as long-standing business relationships in our role as a reliable partner.

Today, most people spend 90% of their time indoors. This makes it imperative that we create healthy interiors. As a supplier of carpets to the commercial sector, we believe it is our responsibility to develop products that contribute to a healthier living and working space.



## CREATIVITY

Design excellence is a priority for us. We are inspired by the latest trends in areas such as fashion, architecture, art and interior design. Next to that we want to stimulate co-creation of stunning new designs either via our international Circles of Architects® platform, in our carpet design centre or by successful partnerships with leading architects and designers.



## FUNCTIONALITY

Pioneering solutions that lead to healthier and happier living and working conditions. Through this process, we ask what our carpets can do to improve people's health and wellbeing, leading to innovations such as the DESSO AirMaster® and SoundMaster®, carpets that reduce the amount of fine dust in the indoor atmosphere and unwanted noise.



## SUSTAINABILITY

We believe we have a responsibility to do more with less. To design, produce, sell and recycle in a way that generates less carbon and less waste while contributing to greater comfort, better health, and increased well-being – for humans and the environment alike.

# Circles of Architects®





To gain inspiration,  
new insights and to  
co-create.

When a stone is cast into water, it displaces the water, creating ripples like an idea spreading out wider and wider. And this is also the effect produced by Circles of Architects, an international network first launched in 2007.

The network is focused on engaging architects and designers in face to face conversations and online networking. We do this to gain inspiration, new insights into markets and trends and finally co-create innovative and stunning carpet designs.

Our dialogue with the A&D community is sparked off at Circles of Architects live events as well as online.

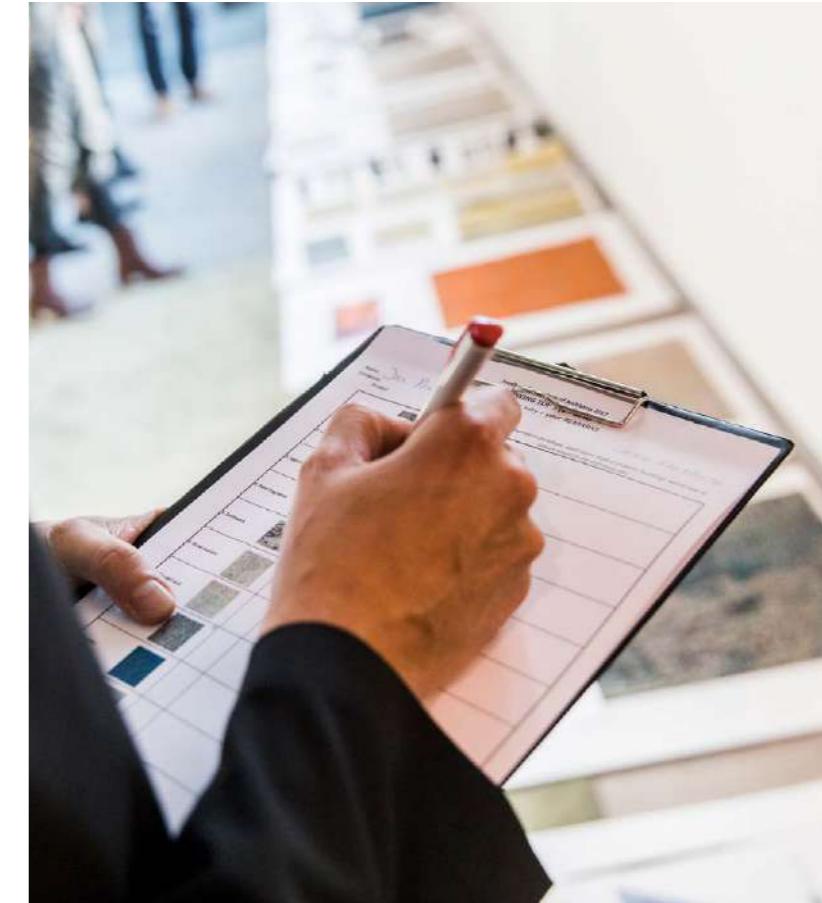



# Carpet design centre



As a leading company in our field, we have taken the next step by developing our carpet design centre. Here, we demonstrate our full transparency with regards to our use of sustainable materials and production methods.

By **involving our customers** in the manufacturing process, we enable them to tap into their own creativity by adding their own signature style to the floor. Next to that, they can take advantage of the expertise offered by an experienced team of textile designers and technicians as well as a pool of specialist machinery.

In addition to our standard carpet collections, we encourage our customers to visit our carpet design centre, where together with our designers, the most suitable flooring solution can be designed. It means that our customers are in the centre of the creative process, and that together we will create a product that meets the specific needs of our customers.



## Carpet design centre collections

The carpet design centre collections are specially developed collections that consists of special ranges of designs and colours in addition to our extensive, standard collections. The carpet design centre collections are made on demand, unique for every customer.



To learn more, contact your Tarkett Sales Representative and make an appointment at our carpet design centre.



# 3D Textures



Carpet creativity  
at your fingertips



3D interior design software has revolutionized commercial interior design. And to help you bring your floor plan designs to life, we have produced 3D Textures giving you the opportunity to create visual experiences that inspire your clients, all based on the latest DESSO carpet designs.

We have made a majority of our collections available for download on the relevant product pages on our website and on SketchUp/[3D Warehouse](#) and [pCon.planner](#).

# DESSO AirMaster®




## Clears the Air®

On average, people spend 90% of their time indoors. But indoor air can be 2 to 5 times more polluted than outdoor air, and with indoor air quality dominating workplace concerns, now is the time to act.

### Breathing clean air is vital to human health

Breathing clean air is a fundamental human right. Yet air pollution is a growing risk to people's health, causing 7m deaths annually, according to the World Health Organization (WHO).<sup>1</sup>

When we think about air quality, we tend to imagine city smog, heavy industry or streets polluted with car exhaust fumes. But indoor air quality is just as important, if not more so, because we spend 90% of our time indoors.

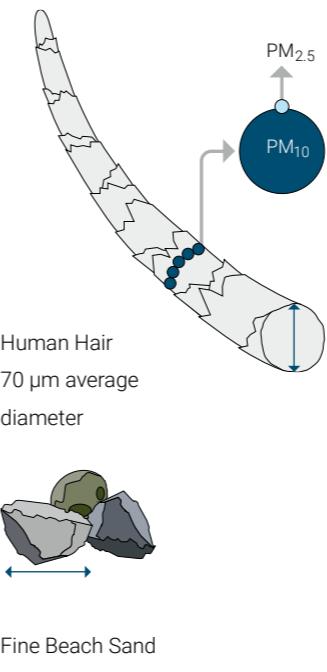

Fine Beach Sand  
90 µm in diameter

Innovating to contribute to people's health and wellbeing

Tiny, invisible particles called particulate matter (PM), also known as particle pollution or fine dust, play a determining factor in the air quality of homes and workplaces, and are directly linked to health risks.<sup>2</sup>

Particulates with an aerodynamic diameter of 10 µm or smaller (PM<sub>10</sub>), in particular, can contain microbial contaminants, such as mould, pollen and allergens,<sup>3</sup> which can lead to respiratory problems and allergic reactions. They can also affect the heart and lungs, causing serious physiological problems.

Taking action to improve indoor air quality is vital to contributing to human health and wellbeing, now and in the future.




AirMaster Reflection 2082, 2934

<sup>1</sup> World Health Organization, total number of deaths caused by ambient and indoor air pollution in 2012.

<sup>2</sup> World Health Organization Air quality guidelines for particulate matter, global update 2005.

<sup>3</sup> Pima County, Department of Environmental Quality.

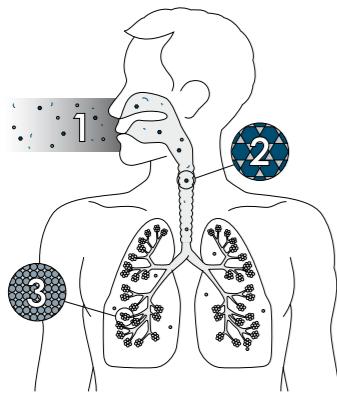

## Understanding particulate matter

The particulate matter we breathe in our homes and workplaces can be grouped into two categories:

### PM<sub>10</sub>

Particles with an aerodynamic diameter of up to 10 µm<sup>1</sup> – these can cause health problems because they are typically small enough to pass through the throat and enter the lungs.<sup>2</sup>

### PM<sub>2.5</sub>

Fine particles with an aerodynamic diameter smaller than 2.5 µm – these can produce harmful effects on the respiratory and cardiovascular system.

## How does particulate matter enter the body?

**1** Particulate matter enters our respiratory (lung) system through the nose and throat.

**2** Larger particulate matter is eliminated through coughing, sneezing and swallowing.

**3** Smaller particulate matter can penetrate deep into the lungs, travelling all the way to the alveoli, causing lung and heart problems, and delivering harmful chemicals to the blood system.



<sup>1</sup> µm symbol represents a micrometre; one thousandth of a millimetre.

<sup>2</sup> World Health Organization Air quality guidelines for particulate matter, Global update 2005.



## Proven effectiveness in clearing the air

DESSO AirMaster is the **first product in the world** to be awarded the **GUI Gold Plus label**, the highest possible accreditation awarded by Gesellschaft für Umwelt- und Innenraumanalytik (GUI), Germany's leading independent air quality testing organisation.


Scientists at GUI's laboratory measured DESSO AirMaster's ability to reduce fine dust concentration, conducting 15 tests in three test rooms, each furnished with different flooring solutions (smooth floor, standard loop pile carpet and DESSO AirMaster).

### The result?

DESSO AirMaster is **8 times more effective** at capturing and retaining fine dust than smooth flooring solutions (PM<sub>10</sub>). It is also **4 times more effective** than standard carpet solutions (PM<sub>10</sub>).<sup>1</sup> Already in 2010, this alone led to a GUI Gold label as the first product in the market, followed by the GUI Gold Plus label in 2015.

The Gold Plus label was awarded for high performance on three further test criteria:

- Suitability for allergy sufferers
- High fine dust binding capacity
- Low Volatile Organic Compound (VOC) emission properties.<sup>2</sup>

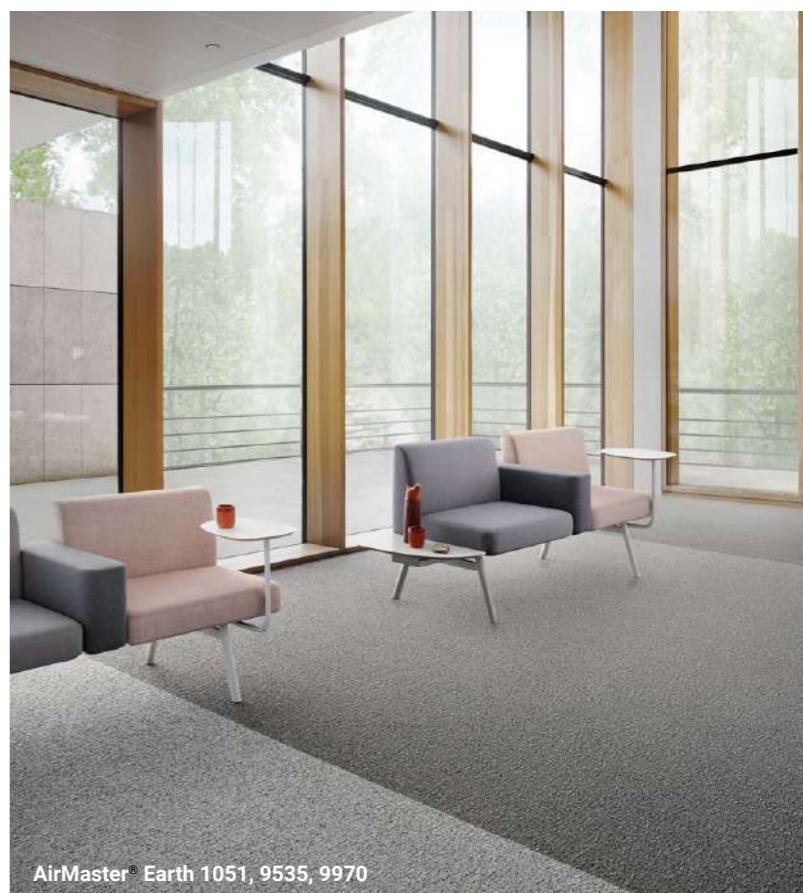

<sup>1</sup> Based on tests performed by GUI with DESSO AirMaster® versus a standard smooth floor and versus standard structured loop pile carpet (median values).

<sup>2</sup> (ISO 16000 test analysis, according AgBB evaluation scheme 2010 and in accordance with GUT emission criteria).

## DESSO AirMaster® laboratory test

The GUI Gold label has been awarded based on the average of **15 repeated tests** in which the excellent fine dust capturing performance of DESSO AirMaster was measured, to safeguard that the results are **scientifically sound** and not just based on a one-time performance. During some tests, DESSO AirMaster proved to be **up to 20 times more effective** in capturing and retaining fine dust than smooth flooring solutions.






### DESSO AirMaster laboratory test (median values)

DESSO AirMaster is 8 times more effective in capturing and retaining fine dust than smooth flooring solutions.

With DESSO AirMaster the concentration of particulate matter drops significantly faster than with smooth flooring.

With smooth flooring the amount of airborne particulate matter stays consistently higher than the peak level of DESSO AirMaster.

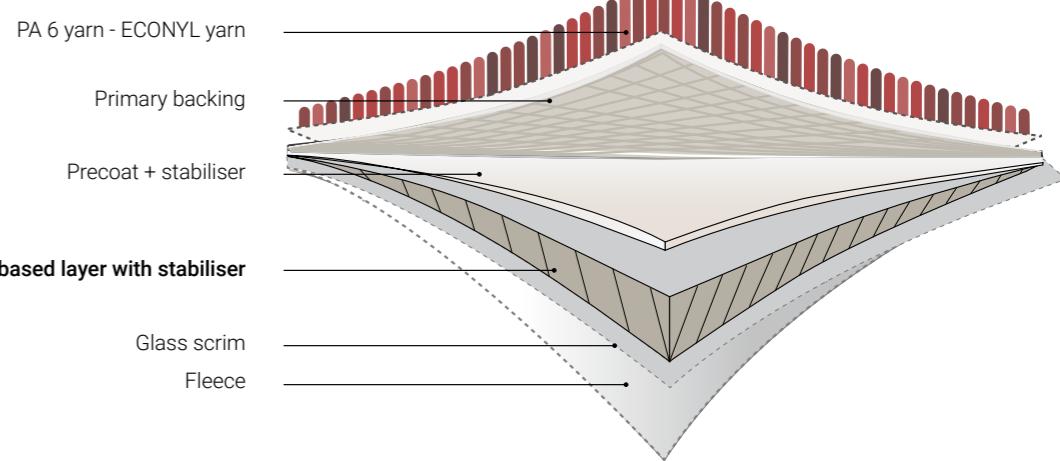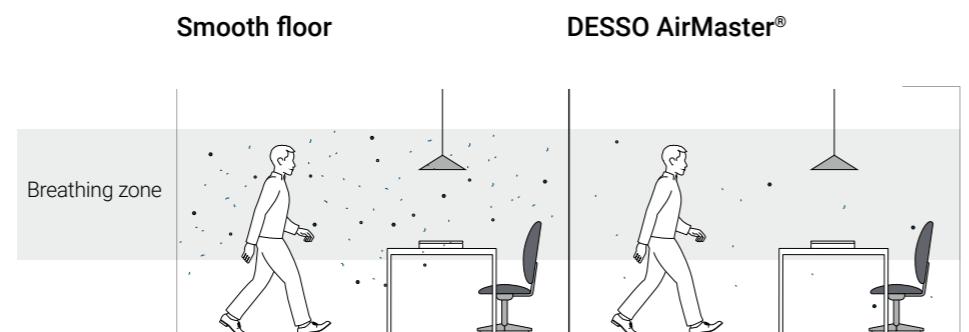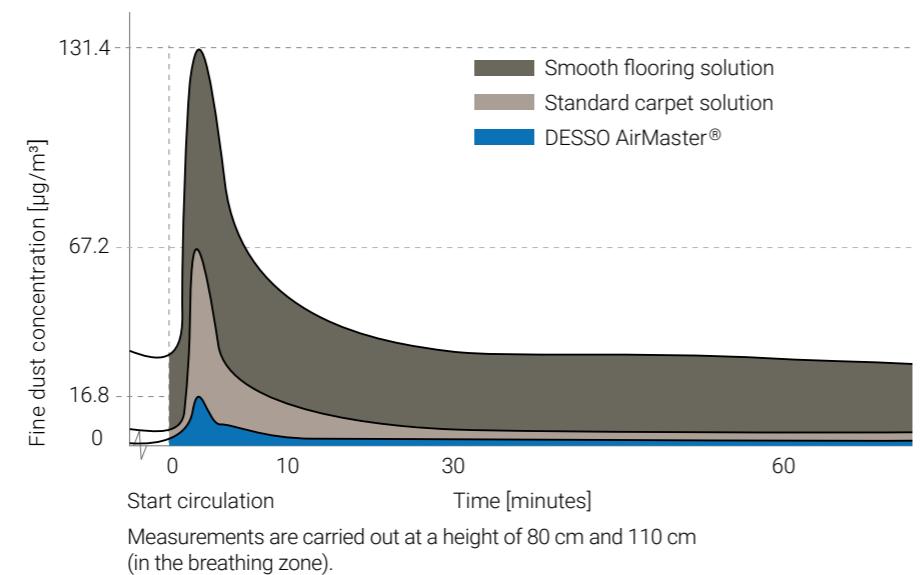

We live our Cradle to Cradle® vision in multiple ways:

- DESSO AirMaster collections contain **100% regenerated ECONYL® nylon yarn**, made from recovered waste materials such as end-of-life carpet yarn and discarded fishing nets.
- Every DESSO AirMaster carpet tile features a primary backing, Colback® Gold,<sup>1</sup> with up to a 95%<sup>2</sup> decrease in antimony content, helping to preserve finite antimony reserves and promote safer tile recycling.
- All AirMaster products are made with Cradle to Cradle® Gold certified DESSO EcoBase® backing, made from 100% positively<sup>3</sup> defined ingredients.


<sup>1</sup> Colback® Gold delivers the same high performance as our previous primary backing with up to a 95% decrease in antimony content.

<sup>2</sup> In comparison with standard non-woven primary backing.

<sup>3</sup> Positively defined means all ingredients have been assessed as either Green (optimal) or Yellow (tolerable) according to the Cradle to Cradle® assessment criteria.

As described in Cradle to Cradle® Certified<sup>TM</sup> Product Standard Version 3.1.

# DESSO SoundMaster®

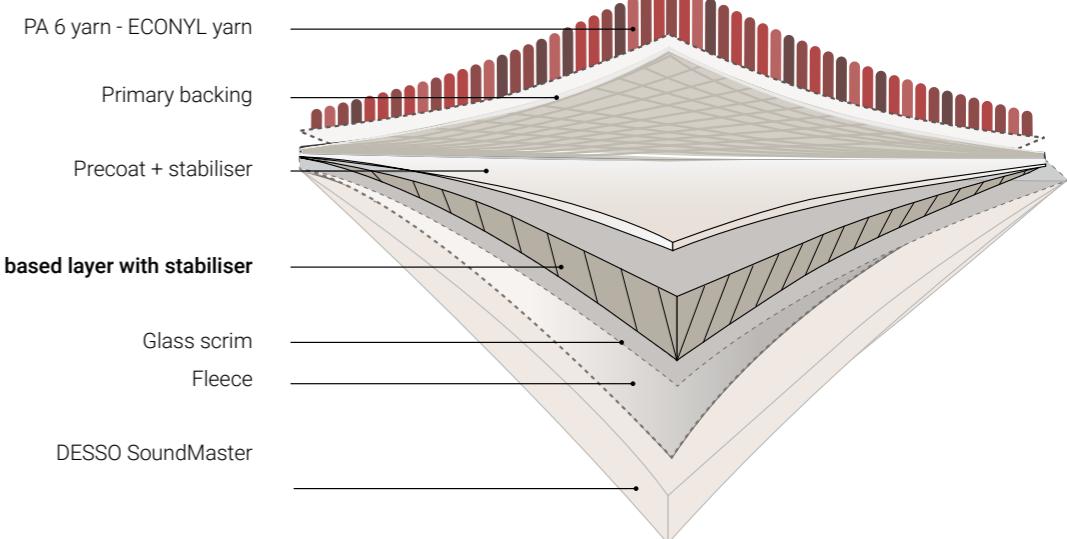

## The perfect solution for improved sound insulation and absorption

Less noise means more productive workforces. Quieter environments prevent health problems occurring, reduce stress levels and improve concentration. This is especially important in open plan offices where people need a space both for quiet concentration and open communication and where they need a place for private conversations as well as large-scale meetings<sup>1</sup>.

Additional noise from external factors such as traffic, heating and air conditioning and computer equipment make it hard for managers to achieve the optimum level of noise within buildings<sup>2</sup>.

That is why good sound absorption and sound insulation is so important. And the best and most cost effective option comes with a SoundMaster carpet tile backing as opposed to the other often more expensive options such as ceilings, walls and panels.

### Our SoundMaster backings

|   | SoundMaster   | SoundMaster Lite  | SoundMaster Thrive  |
|---|---|---|---|
| Impact sound insulation ( $\Delta L_w$ )    | +8 dB above the standard value  | +5 dB above the standard value  | +5 dB above the standard value  |
| Sound absorption performance ( $\alpha_w$ ) | Up to +0.15 ( $\alpha_w$ ), equivalent to up to 100% improvement in comparison to standard carpet designs ( $\alpha_w$ value between 0.15 and 0.20) | Up to +0.15 ( $\alpha_w$ ), equivalent to up to 100% improvement in comparison to standard carpet designs ( $\alpha_w$ value between 0.15 and 0.20) | Up to +0.15 ( $\alpha_w$ ), equivalent to up to 100% improvement in comparison to standard carpet designs ( $\alpha_w$ value between 0.15 and 0.20) |
| Sustainability                              | 80% recycled content  | 80% recycled content  | 100% recyclable in our carpet recycling centre. Maintains Cradle to Cradle® certification level of overall product                                  |

# TarkettTAPE™



Easy, quick and clean installation of carpet tiles



No glue  
No downtime  
Maximum flexibility

**TarkettTAPE changes the standard in carpet tile installation by offering maximum flexibility and adhesive qualities without using any glue on the subfloor.**

#### Maximum flexibility


DESSO carpet tiles installed with TarkettTAPE can easily be removed. Because the tape sticks to the tile, and not to the floor, you can change your carpet tiles when needed or return them to us for recycling at the end of use. TarkettTAPE leaves no traces on the subfloor, the tiles all stick solidly, creating a 'floating' floor that stays in place as long as needed.

TarkettTAPE sticks straight from the roll, whereby installers find it quick, clean and easy to use. It has very low VOC-emissions (Volatile Organic Compounds)<sup>1</sup>, no odour, and no drying time. With these specifications, TarkettTAPE contributes perfectly to your sustainability goals.

#### Fast and Easy Installation

Each tape unit measures ca. 8 x 10 cm with notched perforations between each unit. There are 324 units per roll with a coverage area of ca. 80 m<sup>2</sup>/roll installed with 50 x 50 cm tiles. Packaged from 1 to 16 rolls per box with a minimum order quantity of one roll. The tape unit is centered at the corner of the tile as to engage the inner section of the two adjacent and one opposing tile corners.

TarkettTAPE works perfectly with both our DESSO EcoBase® and DESSO ProBase backing.



<sup>1</sup> TarkettTAPE has been tested and determined to be in compliance with CRI's Green Label Plus Indoor Air Quality Testing Programme.



# Doing More With Less



## DESIGN

Rooted in Cradle to Cradle® principles, all our design decisions start at the end – the perfect place for new, and renewed, beginnings. While designing for functionality and aesthetic appeal, we design for circularity, too – for the multiple long lives our products will live.



## MATERIALS

To limit the use of virgin raw materials, we cooperate closely with partner companies across industries, actively recovering valuable materials otherwise destined for waste. We already incorporate calcium carbonate from the local drinking water industry in our carpet tiles, but we're not stopping there. We're actively on the lookout for robust new partnerships that would enable us to keep more healthy material resources in the loop.



## CIRCULAR JOURNEY

We recognise that we are responsible for the full life cycle of every material we work with. Through our pioneering take-back and recycling programme, ReStart®, we separate yarn and backing for recycling in our carpet recycling centre in the Netherlands without loss of quality, all the while complying with stringent health and environmental standards. We don't do it alone, of course – our network of committed partners helps make this circular journey possible.

We believe we have a responsibility to do more with less. To design, produce, sell and recycle in a way that generates less carbon and less waste while contributing to greater comfort, better health, and increased well-being – for humans and the environment alike.

Our holistic approach to sustainability ensures that we're doing more with less at every stage, from the design of our carpet tiles to the materials we choose to the circular journeys we've put in place. Every step of the way, we're proud to stand with our customers and suppliers, as we work together to close the loop.

Our approach to circularity focuses on three key areas:



# Our Circular Carbon Footprint




To keep track of the carbon generated and saved over a product's life cycle, we calculate the Circular Carbon Footprint of every one of our carpet tile collections. Together with our holistic design approach and carefully considered materials, our closed-loop system ensures that our carpet tiles record an impressively low circular carbon footprint – one we're continually working, alongside our partners and customers, to shrink even further.

## Circularity. Together.

Tarkett cooperates with industry associations, scientific institutions and government bodies to ensure that we deliver tangible proof of our environmental achievements as we build a zero-waste future. But these aren't just our achievements. We share every accomplishment with our customers and supplier partners, who work with us every day to close the loop and help shape a resilient, sustainable economy.

Because we know that together, we're building the way to better floors.

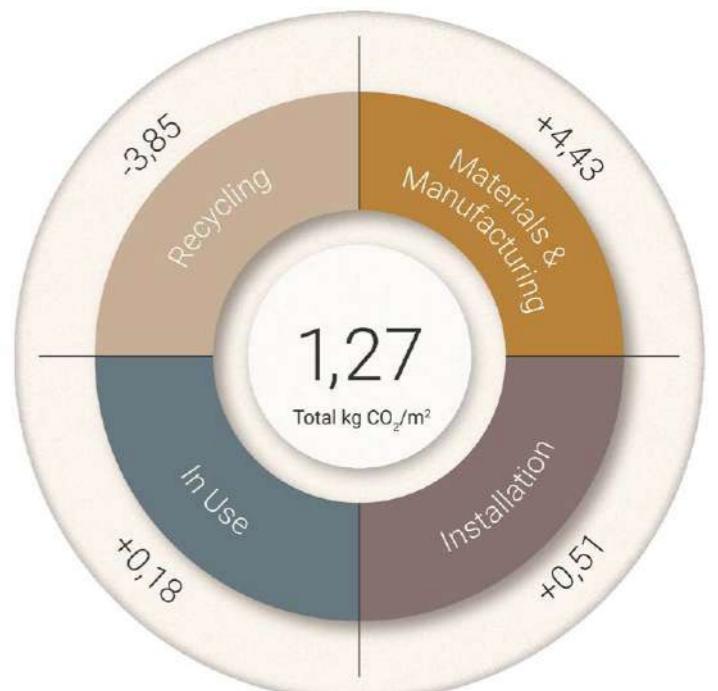

# ReStart®



EcoBase backing

We recognise that we are responsible for the full life cycle of every material we work with.

Through our take-back and recycling programme, ReStart, we will collect your used carpet tiles and take them to our carpet recycling centre to separate the two principal components yarn and backing.

Our Cradle to Cradle® Gold certified DESSO EcoBase backing is fully recyclable in our own production facility. The PA 6 yarn can be returned to our yarn manufacturer and regenerated into high-quality yarn for new carpet tiles.

Thanks to Tarkett's ReStart® take-back programme, post consumer carpet tiles can be given a new lease of life by returning them for recycling.

**For questions about our ReStart programme, please contact your local sales representative.**



# DESSO EcoBase®



EcoBase backing

## Going circular with EcoBase

EcoBase is our 100% recyclable Cradle to Cradle Gold-certified™ carpet tile backing. Made with entirely positively defined<sup>1</sup> ingredients, it has achieved Cradle to Cradle® Platinum level for material health, helping to create a healthier, flourishing work space.

Following a unique collaboration with Dutch drinking water companies to upcycle chalk, EcoBase now contains on average 80% positively defined chalk, which is itself derived from 100% positively defined recycled materials.

As part of a sustainable, people-friendly flooring solution, EcoBase can contribute to both promoting workplace productivity and satisfaction, and achieving sustainable building standards including BREEAM, LEED and WELL.

Through Lloyd's Register we have a third-party assurance covering the following key statements:


- 1 DESSO EcoBase backing\* is 100% recyclable in Tarkett's own production process.
- 2 The recycled material, calcium carbonate coming from the drinking water production, in DESSO products with EcoBase backing can be considered as 100% pre-consumer recycled material.
- 3 DESSO EcoBase backing\* contains on average 80% recycled material coming from the drinking water production.

<sup>1</sup> Positively defined = all ingredients have been assessed as either Green (optimal) or Yellow (tolerable) according to the Cradle to Cradle® assessment criteria.

As described in Cradle to Cradle® Certified™ Product Standard Version 3.1)

Available for our entire DESSO carpet tile range, EcoBase enables Tarkett and our customers to 'close the loop' and contribute to the circular economy.

\* Applicable for EcoBase only and not in combination with other backings.

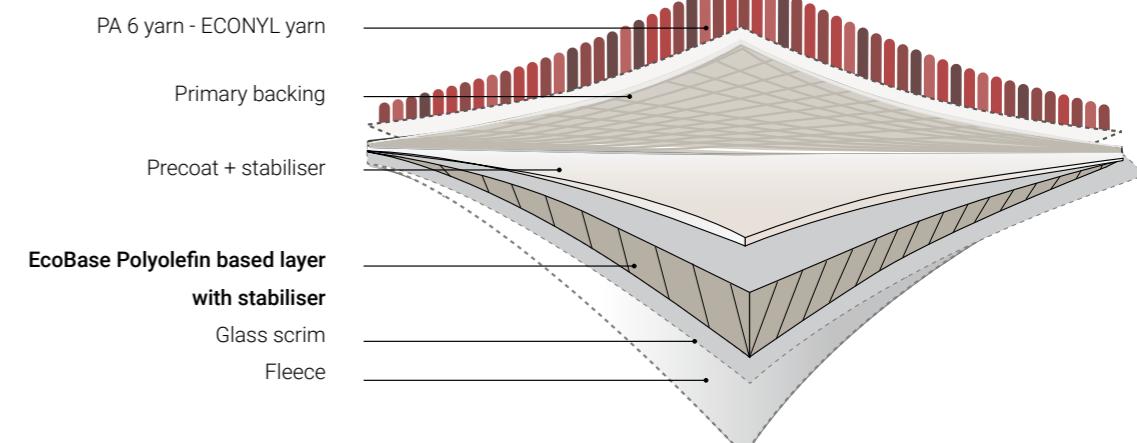

# Material Transparency



With 70% of the world's population set to live in cities by 2050, the built environment stands to play a major role in reducing global greenhouse gas emissions, conserving natural resources and contributing to people's health and wellbeing.

By developing Environmental Product Declarations (EPDs) and introducing Material Health Statements (MHS), we're providing our customers with a clear view of the respective environmental and health profiles of the materials within our products, helping them to make more informed purchasing decisions. In this way, architects and designers will be able to achieve higher sustainable building scores, meet existing and future building regulations, reduce waste and promote the safe recycling of good materials in a circular economy.

## Environmental product declarations (EPD'S)

We have already moved ahead of evolving building regulations and sustainable building certifications by providing customers with EPD statements that highlight the environmental impacts of a product. Central to our sustainability strategy, EPDs are based on lifecycle analysis, and allow us to identify ways to improve the environmental footprint of our products.

For carpets find Tarkett EPDs: <https://environdec.com/library>

EPD's are often complex to understand for non-experts, focus primarily on environmental, rather than health aspects, and do not disclose qualitative detail about the health risks or impacts of individual ingredients. The Tarkett Material Health Statements bridges this information gap, providing accurate information on the hazards and risks of each material.

## Material Health Statements (MHS's)

The Tarkett MHS is an independently verified, science-based declaration highlighting the health risk and hazards of materials in a particular product, down to 100 ppm (0.01%). By introducing the MHS, we are complementing the environmental data provided by our EPDs, responding to our customers' needs, and helping to lead the journey towards healthier materials and greater transparency.

Easy to understand and unique in the marketplace, the Tarkett MHS also represents the first step towards Cradle to Cradle® (C2C) certification and the continuous optimisation of our products. The third-party assessment of our materials is conducted by the Environmental Protection Encouragement Agency (EPEA), the research institute established in 1987 by Dr. Michael Braungart, who co-developed the C2C design concept. Since 2010, the EPEA team has assessed more than 3,000 Tarkett materials according to C2C criteria.


Material Health Statements are available for download on the collection pages of our website.

# Green Building Schemes



DESSO carpets qualify for credits under the internationally accredited Green Building Schemes LEED version 4, BREEAM and WELL.

With particularly high contributions in the categories of Indoor Air Quality, Acoustics, Material Transparency and Material Health, you get the comfort and trust of knowing that with our products you can positively contribute to a healthier and more human-centric built environment.





# DESSO® carpet and the environment



As a carpet manufacturer, we know our customers want re-assurance that our products meet the highest quality standards.

DESSO carpets adhere to the following industry standards:

- BRE certification
- Byggevarubedömnningen
- CE Certificate of Conformity (Europe)
- Cradle to Cradle® Bronze certification
- Cradle to Cradle® Silver certification
- Cradle to Cradle® Gold certification
- CRI Green Label Plus (according to the LEED directive for building products)
- EPD standard EN15804+A2
- Green Tag, Australia
- "Grenelle" law France - effective July 2013
- GUI Allergy certification
- GUI Gold certification (DESSO AirMaster®)
- GUI Gold+ certification (DESSO AirMaster®)
- IMO / MED certified (Marine)
- ISO 9001 and ISO 14001 certified
- NF-UPEC Certification\*
- Prodis-GUT member + certified
- SEC Singapore Green Label

\* Only for the products: Essence, Essence Stripe, Stratos EcoBase, Stratos Blocks EcoBase and Tempra

# Index

45

## Carpet Tiles

|                           |    |                      |     |                 |     |
|---------------------------|----|----------------------|-----|-----------------|-----|
| AirMaster®                | 47 | Essence Pure         | 89  | Mode Collection | 135 |
| AirMaster® Atmos          | 49 | Essence Roots        | 93  | Palatino        | 139 |
| AirMaster® Earth          | 51 | Essence Stripe       | 95  | Protect         | 143 |
| AirMaster® Nazca Gold     | 53 | Essence Structure    | 97  | Recharge        | 145 |
| AirMaster® Reflection     | 55 | Essence Traces       | 99  | Retrace         | 147 |
| AirMaster® Salina Gold    | 57 | Fields               | 101 | Rock            | 149 |
| AirMaster® Savera         | 59 | Foto                 | 105 | Salt            | 151 |
| AirMaster® Savera Shade   | 61 | Fuse Landscape       | 107 | Serene          | 153 |
| AirMaster® Sphere         | 63 | Fuse Create          | 111 | Serene colour   | 155 |
| AirMaster® Tierra Gold    | 65 | Futurity             | 113 | Shape           | 157 |
| AirMaster® Tones          | 67 | Grain                | 115 | Solid           | 159 |
| Arable                    | 69 | Grezzo               | 117 | Stratos         | 161 |
| Arcade                    | 71 | Grezzo Bloom & Vivid | 119 | Stratos Blocks  | 163 |
| Colourant                 | 73 | Iconic               | 121 | Tempra          | 165 |
| Desert                    | 75 | Jeans Original       | 123 | Torso           | 169 |
| Desert AirMaster®         | 77 | Jeans Stonewash      | 125 | Traverse        | 173 |
| DESSO & Patricia Urquiola | 79 | Jeans Twill          | 127 | Verso           | 175 |
| DESSO x RENS              | 81 | Linon                | 129 |                 |     |
| Essence                   | 83 | Lita                 | 131 |                 |     |
| Essence Maze              | 87 | Metallic Shades      | 133 |                 |     |



177

## Broadloom & Rugs

|                 |     |                   |     |                 |     |
|-----------------|-----|-------------------|-----|-----------------|-----|
| Asteranne       | 179 | DESSO & Ex Nature | 193 | Sense of Marble | 205 |
| Denim Regular   | 183 | Essence           | 195 | Shades          | 207 |
| Denim Stonewash | 185 | Flagstone         | 197 | Torso           | 209 |
| Denim Twill     | 187 | Futurity Rug      | 199 | Vintage         | 211 |
| Denim Worn      | 189 | Palatino          | 201 |                 |     |
| DESSO &Ex       | 191 | Patterns          | 203 |                 |     |

213

## Custom Made

|           |     |         |     |
|-----------|-----|---------|-----|
| Axminster | 215 | Gravure | 217 |
|-----------|-----|---------|-----|


219

## Appendix


|                              |     |            |     |
|------------------------------|-----|------------|-----|
| Installation and maintenance | 221 | Icons      | 223 |
|                              |     | Disclaimer | 225 |

We reserve the right to amend specifications or product information without prior notice. All illustrations are non-binding.  
For the latest versions of the technical specifications, check our internet site: [www.tarkett.com](http://www.tarkett.com).

# Carpet tiles

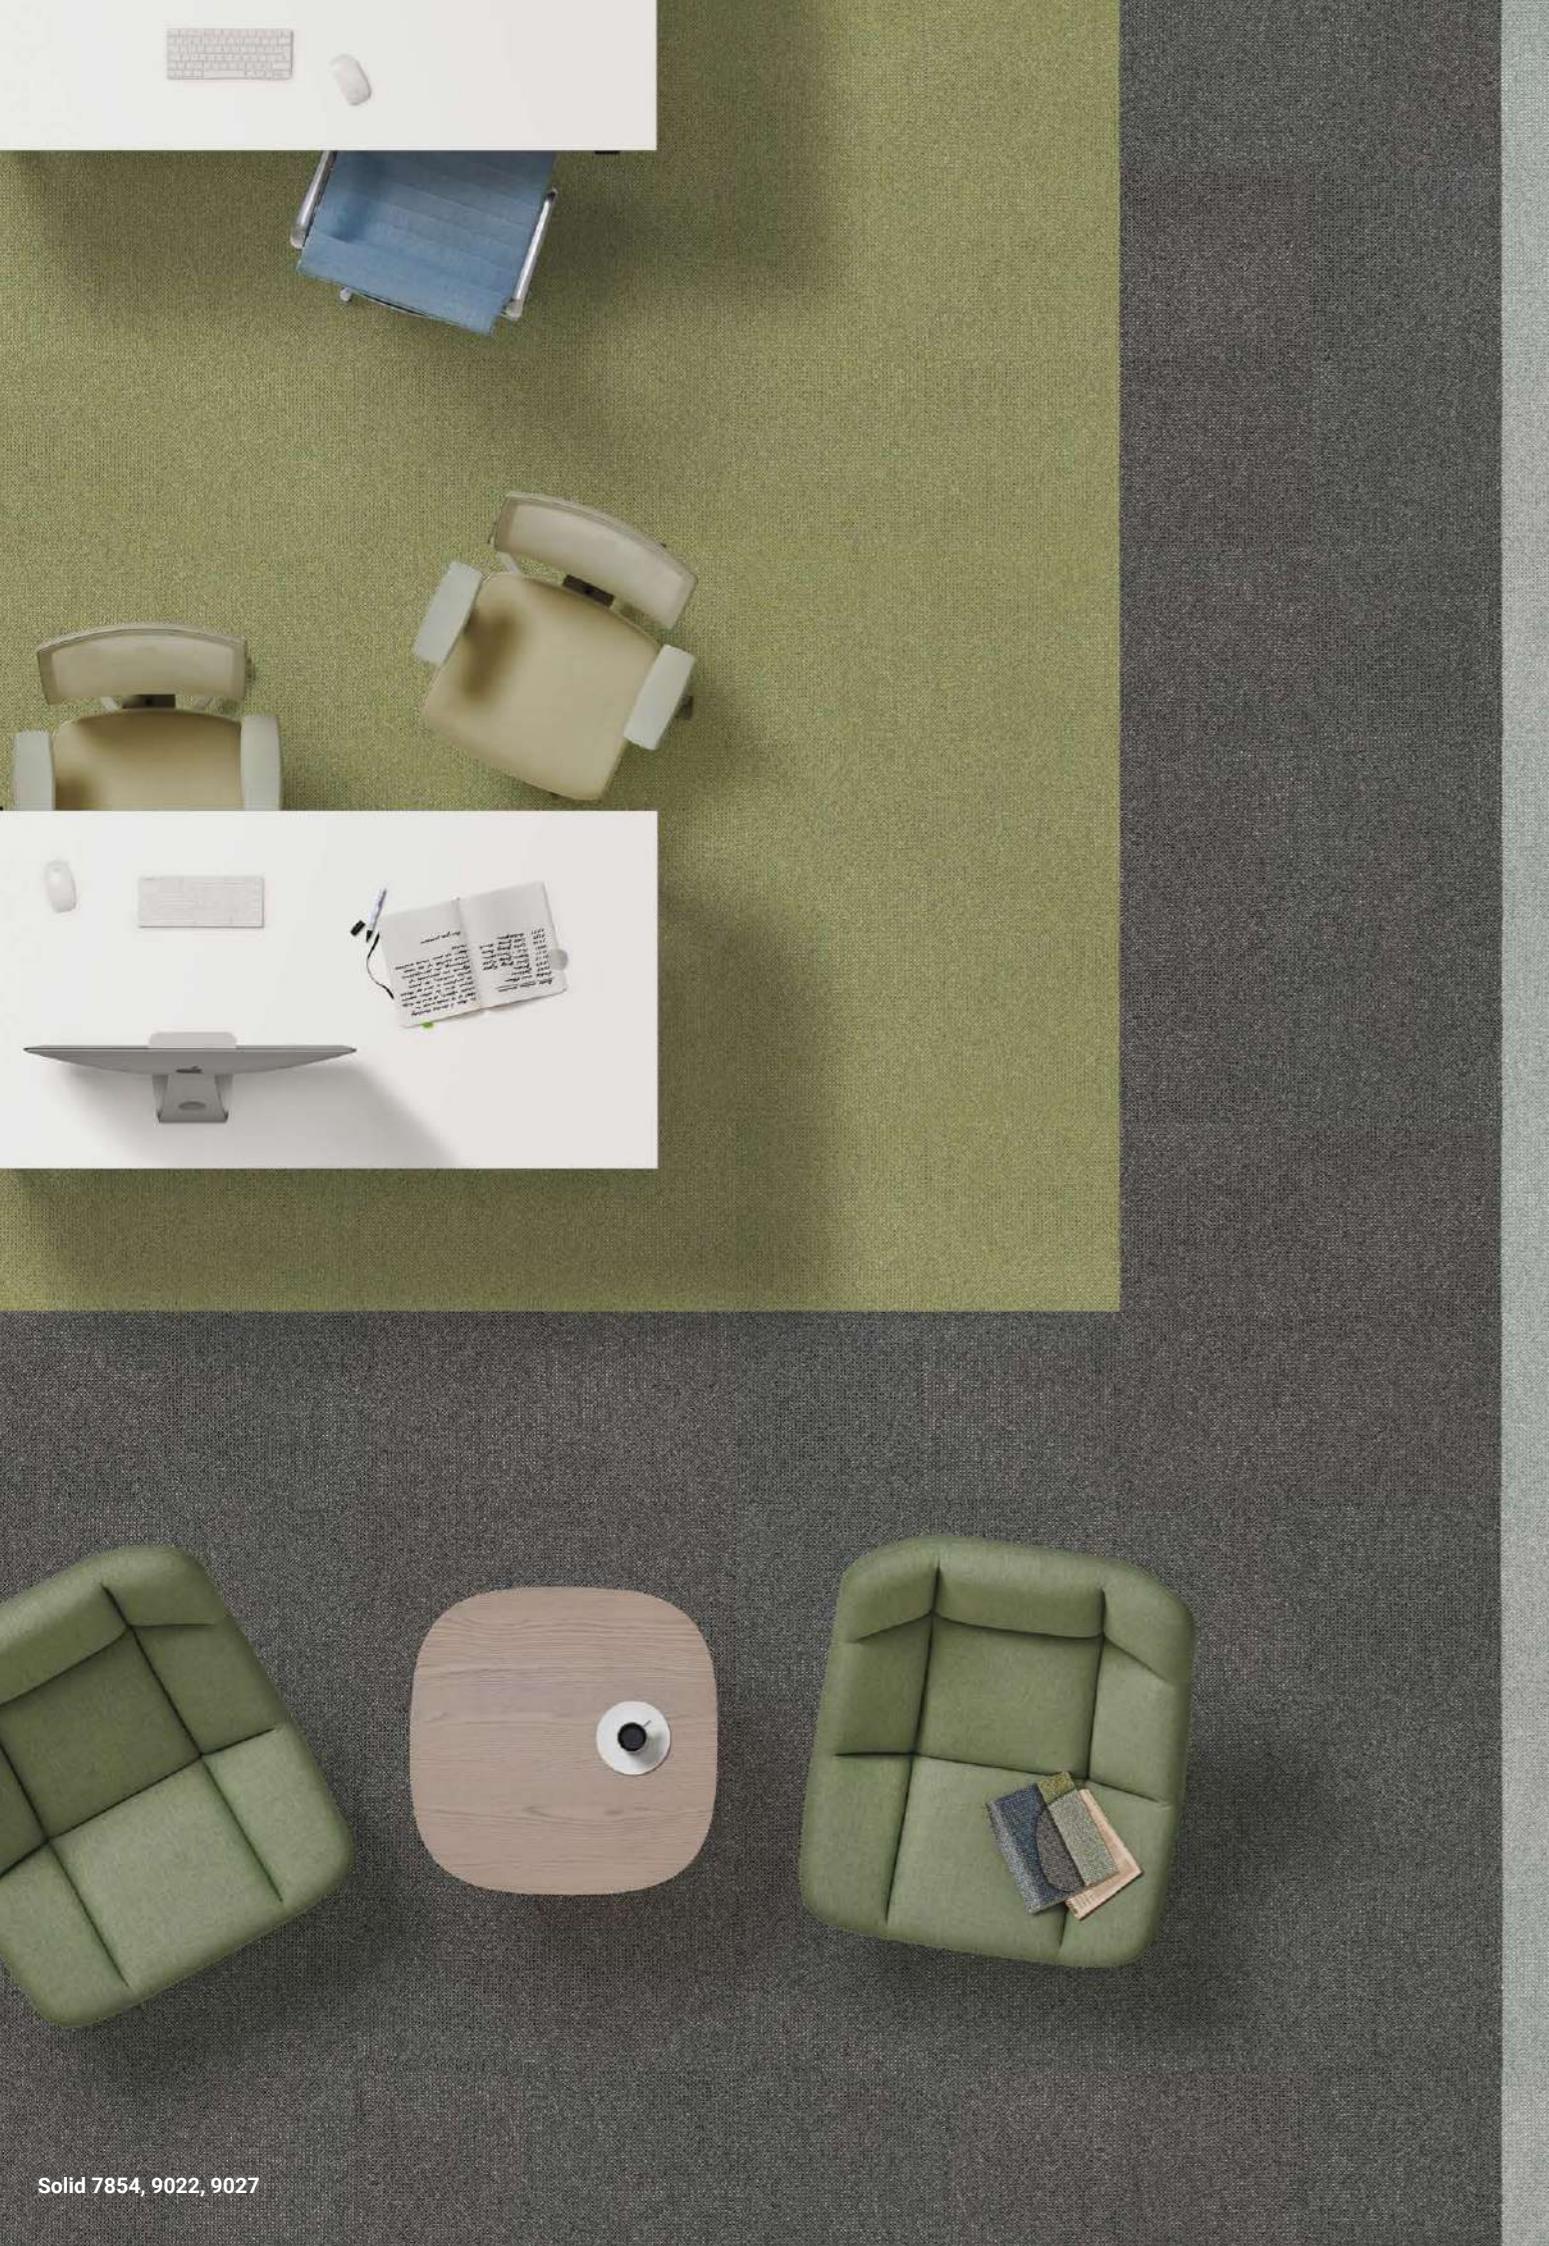

|                           |    |                      |     |                 |     |
|---------------------------|----|----------------------|-----|-----------------|-----|
| AirMaster®                | 47 | Essence Pure         | 89  | Mode Collection | 135 |
| AirMaster® Atmos          | 49 | Essence Roots        | 93  | Palatino        | 139 |
| AirMaster® Earth          | 51 | Essence Stripe       | 95  | Protect         | 143 |
| AirMaster® Nazca Gold     | 53 | Essence Structure    | 97  | Recharge        | 145 |
| AirMaster® Reflection     | 55 | Essence Traces       | 99  | Retrace         | 147 |
| AirMaster® Salina Gold    | 57 | Fields               | 101 | Rock            | 149 |
| AirMaster® Savera         | 59 | Forto                | 105 | Salt            | 151 |
| AirMaster® Savera Shade   | 61 | Fuse Landscape       | 107 | Serene          | 153 |
| AirMaster® Sphere         | 63 | Fuse Create          | 111 | Serene colour   | 155 |
| AirMaster® Tierra Gold    | 65 | Futurity             | 113 | Shape           | 157 |
| AirMaster® Tones          | 67 | Grain                | 115 | Solid           | 159 |
| Arable                    | 69 | Grezzo               | 117 | Stratos         | 161 |
| Arcade                    | 71 | Grezzo Bloom & Vivid | 119 | Stratos Blocks  | 163 |
| Colourant                 | 73 | Iconic               | 121 | Tempra          | 165 |
| Desert                    | 75 | Jeans Original       | 123 | Torso           | 169 |
| Desert AirMaster®         | 77 | Jeans Stonewash      | 125 | Traverse        | 173 |
| DESSO & Patricia Urquiola | 79 | Jeans Twill          | 127 | Verso           | 175 |
| DESSO x RENS              | 81 | Linon                | 129 |                 |     |
| Essence                   | 83 | Lita                 | 131 |                 |     |
| Essence Maze              | 87 | Metallic Shades      | 133 |                 |     |










#### Preliminary specification according to EN 1307


|                               |   |               |
|-------------------------------|---|---------------|
| Type of manufacture           | Tufted 1/10 "   | ISO 2424      |
| Aspect                        | Structured loop pile  | ISO 2424      |
| Dye method                    | Solution dyed   |               |
| Dimension                     | 50 cm x 50 cm / 19.68" x 19.68"<br>(20 tiles per box)                             | EN ISO 24342  |
| Primary backing               | Colback® Gold Polyester fleece  | ISO 2424      |
| Secondary backing             | DESSO EcoBase® * - Contains on average 80% positively defined recycled content    | ISO 2424      |
| Pile fibre composition        | BCF Polyamide 6 and ECONYL®<br>(ECONYL® is made from 100% regenerated content) ** | ISO 2424      |
| Total thickness               | 6.0 mm  | 0.2 inch      |
| Effective pile thickness      | 2.4 mm  | 0.09 inch     |
| Total mass                    | 4150 g/m²   | 122.5 oz/yd²  |
| Total pile mass               | 650 g/m²  | 19.2 oz/yd²   |
| Effective pile mass           | 345 g/m²  | 10.2 oz/yd²   |
| Pile density                  | 0.144 g/cm³   | 0.0052 lb/in³ |
| Number of tufts               | 1580 /dm²   | 132104 /yd²   |
| Stroll test                   | ≤ 2.0 kV  | ISO 6356      |
| Vertical resistance           | ≤ 1 x 10⁹ Ohm   | ISO 10965     |
| Use classification            | 33 Commercial - heavy use   | EN 1307       |
| Dimensional stability         | ≤ 0.2 %   | EN 986        |
| Impact sound reduction ΔLw    | 25 dB   | ISO 10140     |
| Noise reduction               | 0.15 a <sub>w</sub>   | ISO 354       |
| Flammability                  | B <sub>f1</sub> - s1 (loose laid tested)  | EN 13501-1    |
| Light Reflectance Value (LRV) | See right side page per colour  | BS 8493       |
| Colour Depth (L)              | See right side page per colour  | CIELAB        |

\* DESSO EcoBase® is a polyolefin based backing. Positively defined means: all ingredients have been assessed as either Green (optimal) or Yellow (tolerable) according to the Cradle to Cradle® assessment criteria. As described in Cradle to Cradle® Certified CM Product Standard Version 3.0. The total % of recycled content varies per product and per colour which can be found on our website: [www.tarkett.com](http://www.tarkett.com)

\*\* ECONYL® is a yarn made from 100% regenerated content. The total % of regenerated content varies per product and per colour. Whether a colour contains ECONYL® and the exact % thereof can be found on our website: [www.tarkett.com](http://www.tarkett.com)

With EcoBase™  
backing

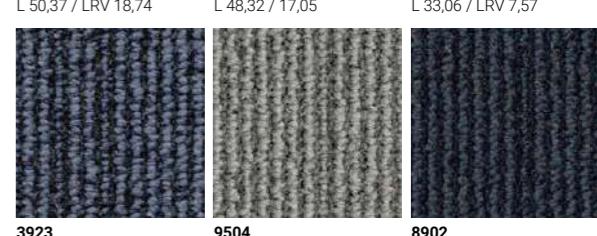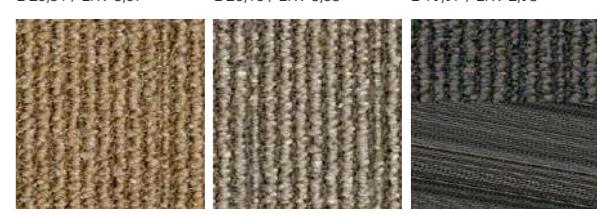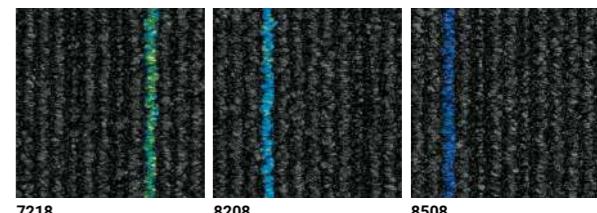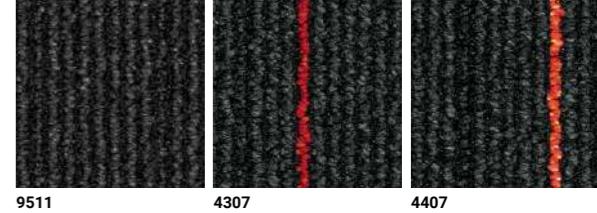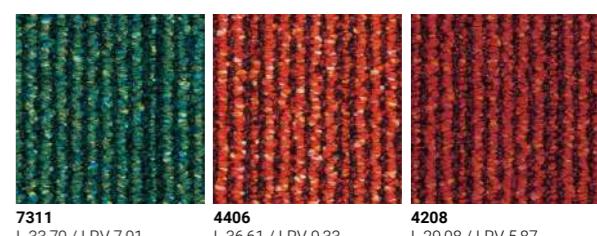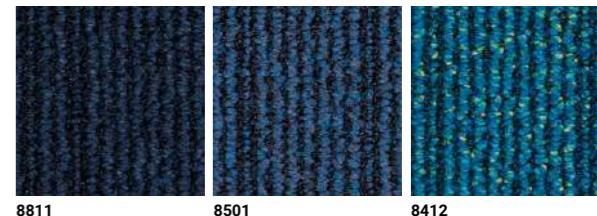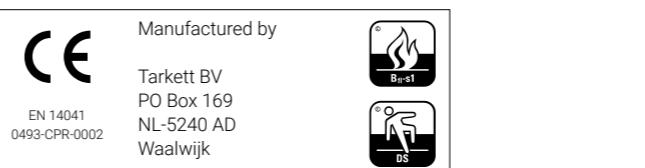




#### Preliminary specification according to EN 1307

|                               |  |               |
|-------------------------------|--|---------------|
| Type of manufacture           | Tufted 1/10 "  | ISO 2424      |
| Aspect                        | Structured loop pile   | ISO 2424      |
| Dye method                    | Solution dyed  |               |
| Dimension                     | 50 cm x 50 cm / 19.68" x 19.68"<br>(20 tiles per box)                          | EN ISO 24342  |
| Primary backing               | Colback® Gold Polyester fleece   | ISO 2424      |
| Secondary backing             | DESSO EcoBase® * - Contains on average 80% positively defined recycled content | ISO 2424      |
| Pile fibre composition        | BCF Polyamide 6 ECONYL®<br>(ECONYL® is made from 100% regenerated content) **  | ISO 2424      |
| Total thickness               | 6.0 mm   | 0.2 inch      |
| Effective pile thickness      | 3.1 mm   | 0.12 inch     |
| Total mass                    | 4200 g/m²  | 124 oz/yd²    |
| Total pile mass               | 700 g/m²   | 20.7 oz/yd²   |
| Effective pile mass           | 460 g/m²   | 13.6 oz/yd²   |
| Pile density                  | 0.148 g/cm³  | 0.0054 lb/in³ |
| Number of tufts               | 1580 /dm²  | 132104 /yd²   |
| Stroll test                   | ≤ 2.0 kV   | ISO 6356      |
| Vertical resistance           | ≤ 1 x 10⁹ Ohm  | ISO 10965     |
| Use classification            | 33 Commercial - heavy use  | EN 1307       |
| Dimensional stability         | ≤ 0.2 %  | EN 986        |
| Impact sound reduction ΔLw    | 24 dB  | ISO 10140     |
| Noise reduction               | 0.15 a_w   | ISO 354       |
| Flammability                  | Bfl - s1 (loose laid tested)   | EN 13501-1    |
| Light Reflectance Value (LRV) | See right side page per colour   | BS 8493       |
| Colour Depth (L)              | See right side page per colour   | CIELAB        |

\* DESSO EcoBase® is a polyolefin based backing. Positively defined means: all ingredients have been assessed as either Green (optimal) or Yellow (tolerable) according to the Cradle to Cradle® assessment criteria. As described in Cradle to Cradle® Certified CM Product Standard Version 3.0. The total % of recycled content varies per product and per colour which can be found on our website: [www.tarkett.com](http://www.tarkett.com)

\*\* ECONYL® is a yarn made from 100% regenerated content. The total % of regenerated content varies per product and per colour. Whether a colour contains ECONYL® and the exact % thereof can be found on our website: [www.tarkett.com](http://www.tarkett.com)


With EcoBase™  
backing

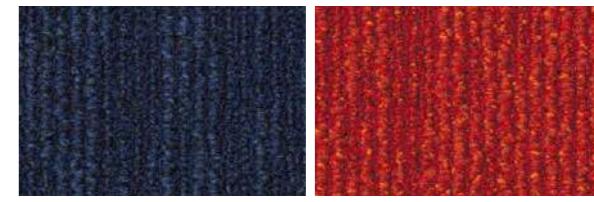

3841 L 23,81 / LRV 4,04  
4301 L 33,07 / LRV 7,57



6117 L 58,49 / LRV 26,48  
6422 L 49,34 / LRV 17,87

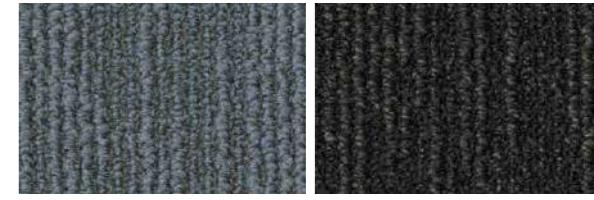

8814 L 39,29 / LRV 10,83  
9031 L 20,75 / LRV 3,18




9032 L 31,17 / LRV 6,72  
9092 L 26,65 / LRV 4,97



9096 L 51,89 / LRV 20,04  
9107 L 50,87 / LRV 19,15



9505 L 51,70 / LRV 19,88  
9523 L 34,56 / LRV 8,28

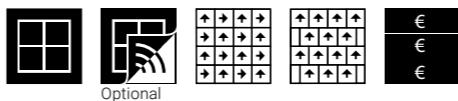

#### Preliminary specification according to EN 1307

|                               |   |               |
|-------------------------------|---|---------------|
| Type of manufacture           | Tufted 1/10 "   | ISO 2424      |
| Aspect                        | Structured loop pile  | ISO 2424      |
| Dye method                    | Solution dyed   |               |
| Dimension                     | 50 cm x 50 cm / 19.68" x 19.68"<br>(20 tiles per box)                         | EN ISO 24342  |
| Primary backing               | Colback® Gold Polyester fleece  | ISO 2424      |
| Secondary backing             | DESSO EcoBase®* - Contains on average 80% positively defined recycled content | ISO 2424      |
| Pile fibre composition        | BCF Polyamide 6 ECONYL®<br>(ECONYL® is made from 100% regenerated content) ** | ISO 2424      |
| Total thickness               | 6.5 mm  | 0.3 inch      |
| Effective pile thickness      | 3.0 mm  | 0.12 inch     |
| Total mass                    | 4300 g/m²   | 126.9 oz/yd²  |
| Total pile mass               | 840 g/m²  | 24.8 oz/yd²   |
| Effective pile mass           | 490 g/m²  | 14.5 oz/yd²   |
| Pile density                  | 0.163 g/cm³   | 0.0059 lb/in³ |
| Number of tufts               | 1540 /dm²   | 128759 /yd²   |
| Stroll test                   | ≤ 2.0 kV  | ISO 6356      |
| Vertical resistance           | ≤ 1 x 10⁹ Ohm   | ISO 10965     |
| Use classification            | 33 Commercial - heavy use   | EN 1307       |
| Dimensional stability         | ≤ 0.2 %   | EN 986        |
| Impact sound reduction ΔLw    | 24 dB   | ISO 10140     |
| Noise reduction               | 0.15 a_w  | ISO 354       |
| Flammability                  | Bfl - s1 (loose laid tested)  | EN 13501-1    |
| Light Reflectance Value (LRV) | See right side page per colour  | BS 8493       |
| Colour Depth (L)              | See right side page per colour  | CIELAB        |

\* DESSO EcoBase® is a polyolefin based backing. Positively defined means: all ingredients have been assessed as either Green (optimal) or Yellow (tolerable) according to the Cradle to Cradle® assessment criteria. As described in Cradle to Cradle® Certified CM Product Standard Version 3.0. The total % of recycled content varies per product and per colour which can be found on our website: [www.tarkett.com](http://www.tarkett.com)

\*\* ECONYL® is a yarn made from 100% regenerated content. The total % of regenerated content varies per product and per colour. Whether a colour contains ECONYL® and the exact % thereof can be found on our website: [www.tarkett.com](http://www.tarkett.com)

With EcoBase™  
backing



1051  
L 62,10 / LRV 30,52




2913  
L 45,99 / LRV 15,26



6202  
L 51,28 / LRV 19,51




8900  
L 36,26 / LRV 9,14

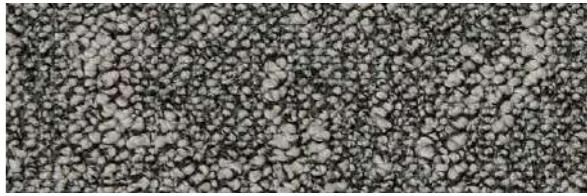


9056  
L 44,09 / LRV 13,90



9535  
L 44,63 / LRV 14,28

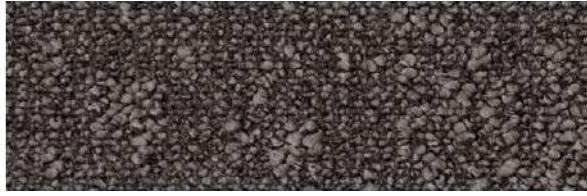

9970  
L 32,67 / LRV 7,39

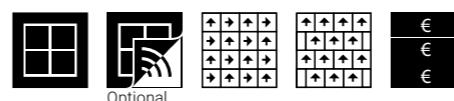


## Preliminary specification according to EN 1307


|                               |  |               |
|-------------------------------|--|---------------|
| Type of manufacture           | Tufted 1/10 "  | ISO 2424      |
| Aspect                        | Structured loop pile   | ISO 2424      |
| Dye method                    | Solution dyed  |               |
| Dimension                     | 50 cm x 50 cm / 19.68" x 19.68" (20 tiles per box)                             |               |
| Primary backing               | Colback® Gold Polyester fleece   | ISO 2424      |
| Secondary backing             | DESSO EcoBase® * - Contains on average 80% positively defined recycled content | ISO 2424      |
| Pile fibre composition        | BCF Polyamide 6 ECONYL® (ECONYL® is made from 100% regenerated content) **     | ISO 2424      |
| Total thickness               | 6.5 mm   | 0.3 inch      |
| Effective pile thickness      | 3.1 mm   | 0.12 inch     |
| Total mass                    | 4350 g/m²  | 128.4 oz/yd²  |
| Total pile mass               | 775 g/m²   | 22.9 oz/yd²   |
| Effective pile mass           | 525 g/m²   | 15.5 oz/yd²   |
| Pile density                  | 0.169 g/cm³  | 0.0061 lb/in³ |
| Number of tufts               | 1580 /dm²  | 132104 /yd²   |
| Stroll test                   | ≤ 2.0 kV   | ISO 6356      |
| Vertical resistance           | ≤ 1 x 10⁹ Ohm  | ISO 10965     |
| Use classification            | 33 Commercial - heavy use  | EN 1307       |
| Dimensional stability         | ≤ 0.2 %  | EN 986        |
| Impact sound reduction ΔLw    | 25 dB  | ISO 10140     |
| Noise reduction               | 0.15 aₜ  | ISO 354       |
| Flammability                  | Bfl - s1 (loose laid tested)   | EN 13501-1    |
| Light Reflectance Value (LRV) | See right side page per colour   | BS 8493       |
| Colour Depth (L)              | See right side page per colour   | CIELAB        |

\* DESSO EcoBase® is a polyolefin based backing. Positively defined means: all ingredients have been assessed as either Green (optimal) or Yellow (tolerable) according to the Cradle to Cradle® assessment criteria. As described in Cradle to Cradle® Certified CM Product Standard Version 3.0. The total % of recycled content varies per product and per colour which can be found on our website: [www.tarkett.com](http://www.tarkett.com)


\*\* ECONYL® is a yarn made from 100% regenerated content. The total % of regenerated content varies per product and per colour. Whether a colour contains ECONYL® and the exact % thereof can be found on our website: [www.tarkett.com](http://www.tarkett.com).

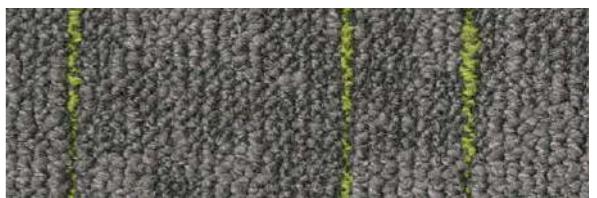With EcoBase™  
backing


9115  
L 44,92 / LRV 14,49

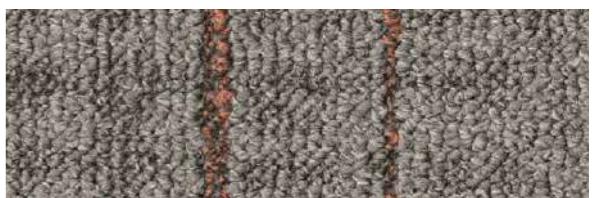

9212  
L 48,05 / LRV 16,84

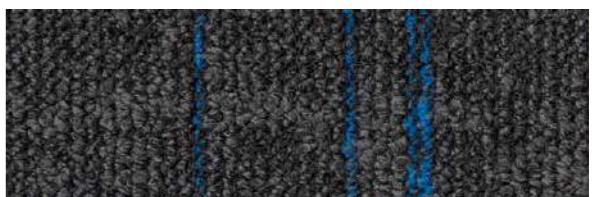


9318  
L 23,71 / LRV 4,01

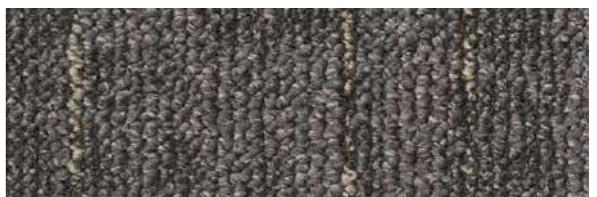

9411  
L 36,68 / LRV 9,37



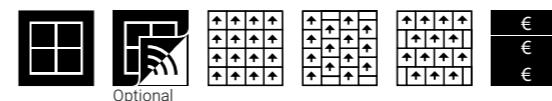


#### Preliminary specification according to EN 1307

|                               |  |               |
|-------------------------------|--|---------------|
| Type of manufacture           | Tufted 1/10 "  | ISO 2424      |
| Aspect                        | Structured loop pile   | ISO 2424      |
| Dye method                    | Solution dyed  |               |
| Dimension                     | 50 cm x 50 cm / 19.68" x 19.68"<br>(20 tiles per box)                          | EN ISO 24342  |
| Primary backing               | Colback® Gold Polyester fleece   | ISO 2424      |
| Secondary backing             | DESSO EcoBase® * - Contains on average 80% positively defined recycled content | ISO 2424      |
| Pile fibre composition        | BCF Polyamide 6 ECONYL®<br>(ECONYL® is made from 100% regenerated content) **  | ISO 2424      |
| Total thickness               | 6.5 mm   | 0.3 inch      |
| Effective pile thickness      | 4.0 mm   | 0.16 inch     |
| Total mass                    | 4400 g/m²  | 129.9 oz/yd²  |
| Total pile mass               | 790 g/m²   | 23.3 oz/yd²   |
| Effective pile mass           | 575 g/m²   | 17.0 oz/yd²   |
| Pile density                  | 0.144 g/cm³  | 0.0052 lb/in³ |
| Number of tufts               | 1580 /dm²  | 132104 /yd²   |
| Stroll test                   | ≤ 2.0 kV   | ISO 6356      |
| Vertical resistance           | ≤ 1 x 10⁹ Ohm  | ISO 10965     |
| Use classification            | 33 Commercial - heavy use  | EN 1307       |
| Dimensional stability         | ≤ 0.2 %  | EN 986        |
| Impact sound reduction ΔLw    | 25 dB  | ISO 10140     |
| Noise reduction               | 0.15 aₜ  | ISO 354       |
| Flammability                  | Bfl - s1 (loose laid tested)   | EN 13501-1    |
| Light Reflectance Value (LRV) | See right side page per colour   | BS 8493       |
| Colour Depth (L)              | See right side page per colour   | CIELAB        |

\* DESSO EcoBase® is a polyolefin based backing. Positively defined means: all ingredients have been assessed as either Green (optimal) or Yellow (tolerable) according to the Cradle to Cradle® assessment criteria. As described in Cradle to Cradle® Certified CM Product Standard Version 3.0. The total % of recycled content varies per product and per colour which can be found on our website: [www.tarkett.com](http://www.tarkett.com)


\*\* ECONYL® is a yarn made from 100% regenerated content. The total % of regenerated content varies per product and per colour. Whether a colour contains ECONYL® and the exact % thereof can be found on our website: [www.tarkett.com](http://www.tarkett.com)

With EcoBase™  
backing

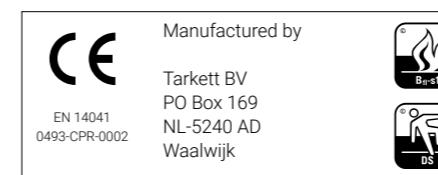



## AirMaster® Gold Collection

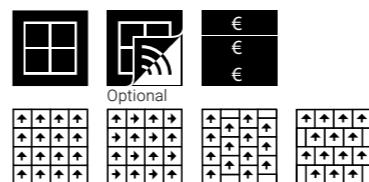

### Preliminary specification according to EN 1307

|                               |  |               |
|-------------------------------|--|---------------|
| Type of manufacture           | Tufted 1/10 "  | ISO 2424      |
| Aspect                        | Structured loop pile   | ISO 2424      |
| Dye method                    | Solution dyed  |               |
| Dimension                     | 50 cm x 50 cm / 19.68" x 19.68" (20 tiles per box)                             |               |
| Primary backing               | Colback® Gold Polyester fleece   | ISO 2424      |
| Secondary backing             | DESSO EcoBase® * - Contains on average 80% positively defined recycled content | ISO 2424      |
| Pile fibre composition        | BCF Polyamide 6 ECONYL® (ECONYL® is made from 100% regenerated content) **     | ISO 2424      |
| Total thickness               | 7,5 mm   | 0.3 inch      |
| Effective pile thickness      | 4.0 mm   | 0.16 inch     |
| Total mass                    | 4450 g/m²  | 131.3 oz/yd²  |
| Total pile mass               | 865 g/m²   | 25.5 oz/yd²   |
| Effective pile mass           | 565 g/m²   | 16.7 oz/yd²   |
| Pile density                  | 0.141 g/cm³  | 0.0051 lb/in³ |
| Number of tufts               | 1580 / dm²   | 132104 / yd²  |
| Stroll test                   | ≤ 2.0 kV   | ISO 6356      |
| Vertical resistance           | ≤ 1 x 10⁹ Ohm  | ISO 10965     |
| Use classification            | 33 Commercial - heavy use  | EN 1307       |
| Dimensional stability         | ≤ 0.2 %  | EN 986        |
| Impact sound reduction ΔLw    | 26 dB  | ISO 10140     |
| Noise reduction               | 0.20 αw  | ISO 354       |
| Flammability                  | Bfl - s1 (loose laid tested)   | EN 13501-1    |
| Light Reflectance Value (LRV) | See right side page per colour   | BS 8493       |
| Colour Depth (L)              | See right side page per colour   | CIELAB        |

\* DESSO EcoBase® is a polyolefin based backing. Positively defined means: all ingredients have been assessed as either Green (optimal) or Yellow (tolerable) according to the Cradle to Cradle® assessment criteria. As described in Cradle to Cradle® Certified CM Product Standard Version 3.0. The total % of recycled content varies per product and per colour which can be found on our website: [www.tarkett.com](http://www.tarkett.com)

\*\* ECONYL® is a yarn made from 100% regenerated content. The total % of regenerated content varies per product and per colour. Whether a colour contains ECONYL® and the exact % thereof can be found on our website: [www.tarkett.com](http://www.tarkett.com).


With EcoBase™  
backing



9501  
L 27,13 / LRV 5,14



9502  
L 26,74 / LRV 5,00

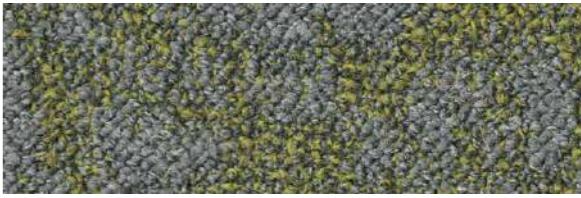


9514  
L 42,82 / LRV 13,04



9533  
L 36,62 / LRV 9,33



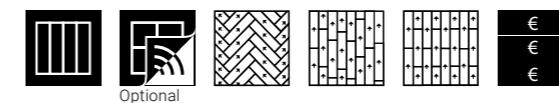


## Preliminary specification according to EN 1307

|                               |  |               |
|-------------------------------|--|---------------|
| Type of manufacture           | Tufted 1/10 "  | ISO 2424      |
| Aspect                        | Structured loop pile   | ISO 2424      |
| Dye method                    | Solution dyed  |               |
| Dimension                     | 100 cm x 25 cm / 39.36" x 9.84"<br>(20 planks per box)                         | EN ISO 24342  |
| Primary backing               | Colback® Gold Polyester fleece   | ISO 2424      |
| Secondary backing             | DESSO EcoBase® * - Contains on average 80% positively defined recycled content | ISO 2424      |
| Pile fibre composition        | BCF Polyamide 6 ECONYL®<br>(ECONYL® is made from 100% regenerated content) **  | ISO 2424      |
| Total thickness               | 6.0 mm   | 0.2 inch      |
| Effective pile thickness      | 3.1 mm   | 0.12 inch     |
| Total mass                    | 4200 g/m²  | 124.0 oz/yd²  |
| Total pile mass               | 700 g/m²   | 20.7 oz/yd²   |
| Effective pile mass           | 460 g/m²   | 13.6 oz/yd²   |
| Pile density                  | 0.148 g/cm³  | 0.0054 lb/in³ |
| Number of tufts               | 1580 /dm²  | 132104 /yd²   |
| Stroll test                   | ≤ 2.0 kV   | ISO 1763      |
| Use classification            | 33 Commercial - heavy use  | EN 1307       |
| Dimensional stability         | ≤ 0.2 %  | EN 986        |
| Impact sound reduction ΔLw    | 24 dB  | ISO 10140     |
| Noise reduction               | 0.15 aₙ  | ISO 354       |
| Flammability                  | B₂ - s1 (loose laid tested)  | EN 13501-1    |
| Light Reflectance Value (LRV) | See right side page per colour   | BS 8493       |
| Colour Depth (L)              | See right side page per colour   | CIELAB        |

\* DESSO EcoBase® is a polyolefin based backing. Positively defined means: all ingredients have been assessed as either Green (optimal) or Yellow (tolerable) according to the Cradle to Cradle® assessment criteria. As described in Cradle to Cradle® Certified CM Product Standard Version 3.0. The total % of recycled content varies per product and per colour which can be found on our website: [www.tarkett.com](http://www.tarkett.com)

\*\* ECONYL® is a yarn made from 100% regenerated content. The total % of regenerated content varies per product and per colour. Whether a colour contains ECONYL® and the exact % thereof can be found on our website: [www.tarkett.com](http://www.tarkett.com)

With EcoBase™  
backing

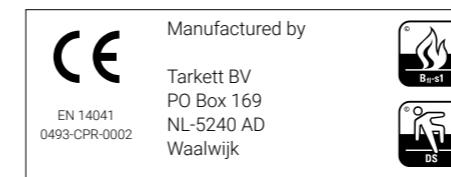


4431  
L 38,91 / LRV 10,61



5201  
L 41,18 / LRV 11,98



7384  
L 43,18 / LRV 13,28

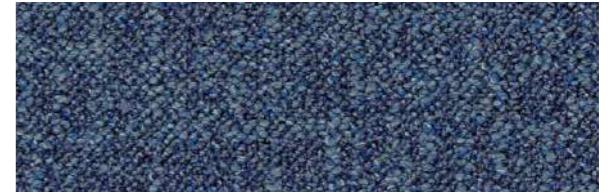

8212  
L 36,39 / LRV 9,21



9032  
L 29,10 / LRV 5,88




9532  
L 35,55 / LRV 8,78



## AirMaster® Savera Shade



## AirMaster® Savera & Savera Shade







### Preliminary specification according to EN 1307

|                               |  |               |
|-------------------------------|--|---------------|
| Type of manufacture           | Tufted 1/10 "  | ISO 2424      |
| Aspect                        | Structured loop pile   | ISO 2424      |
| Dye method                    | Solution dyed  |               |
| Dimension                     | 100 cm x 25 cm / 39.36" x 9.84"<br>(20 planks per box)                         | EN ISO 24342  |
| Primary backing               | Colback® Gold Polyester fleece   | ISO 2424      |
| Secondary backing             | DESSO EcoBase® * - Contains on average 80% positively defined recycled content | ISO 2424      |
| Pile fibre composition        | BCF Polyamide 6 ECONYL®<br>(ECONYL® is made from 100% regenerated content) **  | ISO 2424      |
| Total thickness               | 6.0 mm   | 0.2 inch      |
| Effective pile thickness      | 3.1 mm   | 0.12 inch     |
| Total mass                    | 4200 g/m²  | 124.0 oz/yd²  |
| Total pile mass               | 700 g/m²   | 20.7 oz/yd²   |
| Effective pile mass           | 460 g/m²   | 13.6 oz/yd²   |
| Pile density                  | 0.148 g/cm³  | 0.0054 lb/in³ |
| Number of tufts               | 1580 /dm²  | 132104 /yd²   |
| Stroll test                   | ≤ 2.0 kV   | ISO 6356      |
| Use classification            | 33 Commercial - heavy use  | EN 1307       |
| Dimensional stability         | ≤ 0.2 %  | EN 986        |
| Impact sound reduction ΔLw    | 24 dB  | ISO 10140     |
| Noise reduction               | 0.15 aₜ  | ISO 354       |
| Flammability                  | B₂ - s1 (loose laid tested)  | EN 13501-1    |
| Light Reflectance Value (LRV) | See right side page per colour   | BS 8493       |
| Colour Depth (L)              | See right side page per colour   | CIELAB        |

\* DESSO EcoBase® is a polyolefin based backing. Positively defined means: all ingredients have been assessed as either Green (optimal) or Yellow (tolerable) according to the Cradle to Cradle® assessment criteria. As described in Cradle to Cradle® Certified CM Product Standard Version 3.0. The total % of recycled content varies per product and per colour which can be found on our website: [www.tarkett.com](http://www.tarkett.com)


\*\* ECONYL® is a yarn made from 100% regenerated content. The total % of regenerated content varies per product and per colour. Whether a colour contains ECONYL® and the exact % thereof can be found on our website: [www.tarkett.com](http://www.tarkett.com)

With EcoBase™  
backing

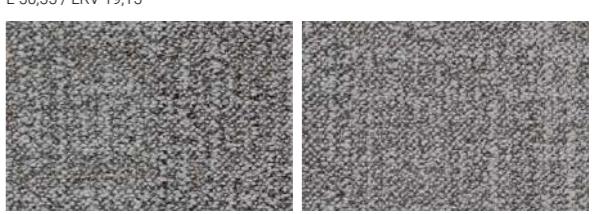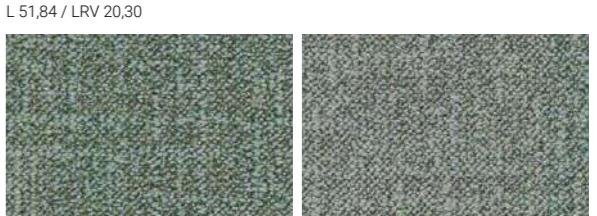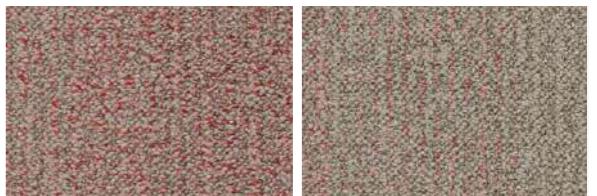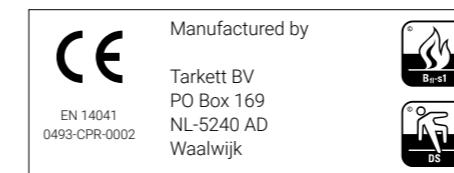

## AirMaster® Savera Shade



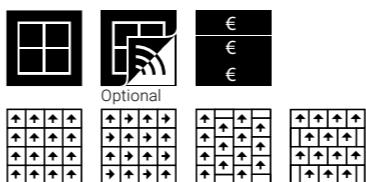



#### Preliminary specification according to EN 1307

|                               |  |               |
|-------------------------------|--|---------------|
| Type of manufacture           | Tufted 1/10 "  | ISO 2424      |
| Aspect                        | Structured loop pile   | ISO 2424      |
| Dye method                    | Solution dyed  |               |
| Dimension                     | 50 cm x 50 cm / 19.68" x 19.68"<br>(20 tiles per box)                          | EN ISO 24342  |
| Primary backing               | Colback® Gold Polyester fleece   | ISO 2424      |
| Secondary backing             | DESSO EcoBase® * - Contains on average 80% positively defined recycled content | ISO 2424      |
| Pile fibre composition        | BCF Polyamide 6 ECONYL®<br>(ECONYL® is made from 100% regenerated content) **  | ISO 2424      |
| Total thickness               | 6.0 mm   | 0.2 inch      |
| Effective pile thickness      | 3.1 mm   | 0.12 inch     |
| Total mass                    | 4200 g/m²  | 124.0 oz/yd²  |
| Total pile mass               | 700 g/m²   | 20.7 oz/yd²   |
| Effective pile mass           | 460 g/m²   | 13.6 oz/yd²   |
| Pile density                  | 0.148 g/cm³  | 0.0054 lb/in³ |
| Number of tufts               | 1580 /dm²  | 132104 /yd²   |
| Stroll test                   | ≤ 2.0 kV   | ISO 6356      |
| Vertical resistance           | ≤ 1 x 10⁹ Ohm  | ISO 10965     |
| Use classification            | 33 Commercial - heavy use  | EN 1307       |
| Dimensional stability         | ≤ 0.2 %  | EN 986        |
| Impact sound reduction ΔLw    | 24 dB  | ISO 10140     |
| Noise reduction               | 0.15 a_w   | ISO 354       |
| Flammability                  | Bfl - s1 (loose laid tested)   | EN 13501-1    |
| Light Reflectance Value (LRV) | See right side page per colour   | BS 8493       |
| Colour Depth (L)              | See right side page per colour   | CIELAB        |


\* DESSO EcoBase® is a polyolefin based backing. Positively defined means: all ingredients have been assessed as either Green (optimal) or Yellow (tolerable) according to the Cradle to Cradle® assessment criteria. As described in Cradle to Cradle® Certified CM Product Standard Version 3.0. The total % of recycled content varies per product and per colour which can be found on our website: [www.tarkett.com](http://www.tarkett.com)

\*\* ECONYL® is a yarn made from 100% regenerated content. The total % of regenerated content varies per product and per colour. Whether a colour contains ECONYL® and the exact % thereof can be found on our website: [www.tarkett.com](http://www.tarkett.com)


With EcoBase™  
backing

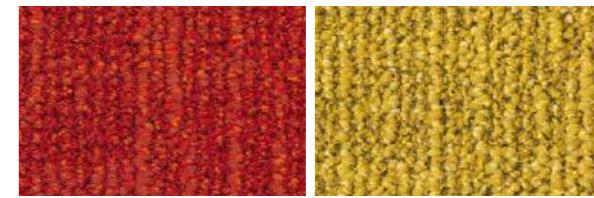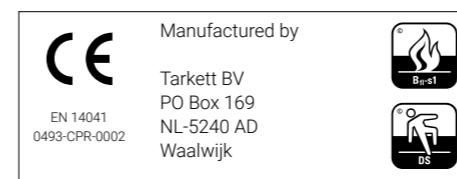

4301 L 32,95 / LRV 7,51  
6117 L 58,58 / LRV 26,57

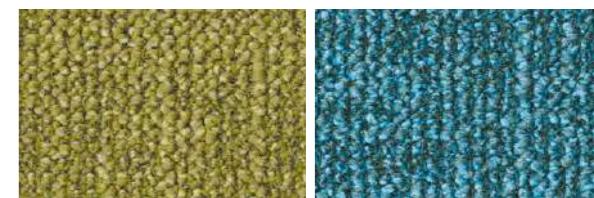


6422 L 49,75 / LRV 18,21  
8103 L 46,40 / LRV 15,56

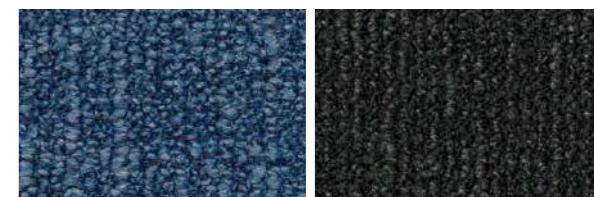

8812 L 31,31 / LRV 6,78  
9031 L 19,81 / LRV 2,94



9032 L 29,10 / LRV 5,88  
9092 L 26,39 / LRV 4,88

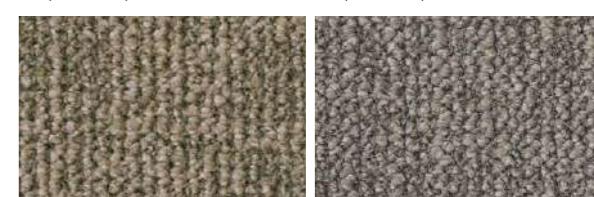


9096 L 50,42 / LRV 18,77  
9107 L 50,57 / LRV 18,90



9505 L 51,20 / LRV 19,44  
9523 L 34,60 / LRV 8,30



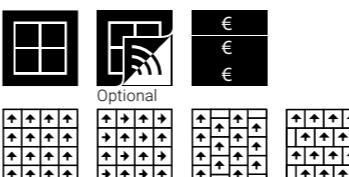

## Preliminary specification according to EN 1307


|                               |  |               |
|-------------------------------|--|---------------|
| Type of manufacture           | Tufted 1/10 "  | ISO 2424      |
| Aspect                        | Structured loop pile   | ISO 2424      |
| Dye method                    | Solution dyed  |               |
| Dimension                     | 50 cm x 50 cm / 19.68" x 19.68" (20 tiles per box)                             |               |
| Primary backing               | Colback® Gold Polyester fleece   | ISO 2424      |
| Secondary backing             | DESSO EcoBase® * - Contains on average 80% positively defined recycled content | ISO 2424      |
| Pile fibre composition        | BCF Polyamide 6 ECONYL® (ECONYL® is made from 100% regenerated content) **     | ISO 2424      |
| Total thickness               | 6.5 mm   | 0.3 inch      |
| Effective pile thickness      | 3.1 mm   | 0.12 inch     |
| Total mass                    | 4500 g/m²  | 132.8 oz/yd²  |
| Total pile mass               | 900 g/m²   | 26.6 oz/yd²   |
| Effective pile mass           | 525 g/m²   | 15.5 oz/yd²   |
| Pile density                  | 0.169 g/cm³  | 0.0061 lb/in³ |
| Number of tufts               | 1580 / dm²   | 132104 / yd²  |
| Stroll test                   | ≤ 2.0 kV   | ISO 6356      |
| Vertical resistance           | ≤ 1 x 10⁹ Ohm  | ISO 10965     |
| Use classification            | 33 Commercial - heavy use  | EN 1307       |
| Dimensional stability         | ≤ 0.2 %  | EN 986        |
| Impact sound reduction ΔLw    | 22 dB  | ISO 10140     |
| Noise reduction               | 0.15 a_w   | ISO 354       |
| Flammability                  | Bfl - s1 (loose laid tested)   | EN 13501-1    |
| Light Reflectance Value (LRV) | See right side page per colour   | BS 8493       |
| Colour Depth (L)              | See right side page per colour   | CIELAB        |

\* DESSO EcoBase® is a polyolefin based backing. Positively defined means: all ingredients have been assessed as either Green (optimal) or Yellow (tolerable) according to the Cradle to Cradle® assessment criteria. As described in Cradle to Cradle® Certified CM Product Standard Version 3.0. The total % of recycled content varies per product and per colour which can be found on our website: [www.tarkett.com](http://www.tarkett.com)


\*\* ECONYL® is a yarn made from 100% regenerated content. The total % of regenerated content varies per product and per colour. Whether a colour contains ECONYL® and the exact % thereof can be found on our website: [www.tarkett.com](http://www.tarkett.com).

With EcoBase™  
backing

1510  
L 43,36 / LRV 13,40

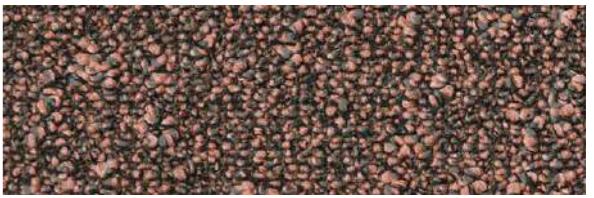

4432  
L 38,61 / LRV 10,43

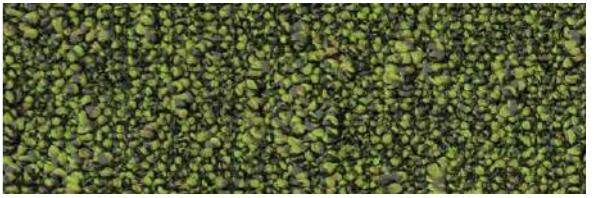

7163  
L 43,10 / LRV 13,22



8301  
L 28,53 / LRV 5,66



9505  
L 40,49 / LRV 11,55



9524  
L 45,06 / LRV 14,59




9850  
L 27,28 / LRV 5,19



9975  
L 30,88 / LRV 6,60



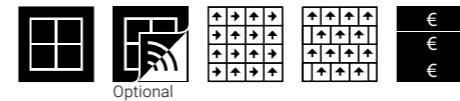



#### Preliminary specification according to EN 1307

|                               |  |               |
|-------------------------------|--|---------------|
| Type of manufacture           | Tufted 1/10 "  | ISO 2424      |
| Aspect                        | Structured loop pile   | ISO 2424      |
| Dye method                    | Solution dyed  |               |
| Dimension                     | 50 cm x 50 cm / 19.68" x 19.68"<br>(20 tiles per box)                          | EN ISO 24342  |
| Primary backing               | Colback® Gold Polyester fleece   | ISO 2424      |
| Secondary backing             | DESSO EcoBase® * - Contains on average 80% positively defined recycled content | ISO 2424      |
| Pile fibre composition        | BCF Polyamide 6 ECONYL®<br>(ECONYL® is made from 100% regenerated content) **  | ISO 2424      |
| Total thickness               | 6.0 mm   | 0.2 inch      |
| Effective pile thickness      | 3.1 mm   | 0.12 inch     |
| Total mass                    | 4150 g/m²  | 122.5 oz/yd²  |
| Total pile mass               | 675 g/m²   | 19.9 oz/yd²   |
| Effective pile mass           | 435 g/m²   | 12.8 oz/yd²   |
| Pile density                  | 0.140 g/cm³  | 0.0051 lb/in³ |
| Number of tufts               | 1580 /dm²  | 132104 /yd²   |
| Stroll test                   | ≤ 2.0 kV   | ISO 1763      |
| Vertical resistance           | ≤ 1 x 10⁹ Ohm  | ISO 10965     |
| Use classification            | 33 Commercial - heavy use  | EN 1307       |
| Dimensional stability         | ≤ 0.2 %  | EN 986        |
| Impact sound reduction ΔLw    | 22 dB  | ISO 10140     |
| Noise reduction               | 0.15 a <sub>w</sub>  | ISO 354       |
| Flammability                  | B <sub>f1</sub> - s1 (loose laid tested)                                       | EN 13501-1    |
| Light Reflectance Value (LRV) | See right side page per colour   | BS 8493       |
| Colour Depth (L)              | See right side page per colour   | CIELAB        |

\* DESSO EcoBase® is a polyolefin based backing. Positively defined means: all ingredients have been assessed as either Green (optimal) or Yellow (tolerable) according to the Cradle to Cradle® assessment criteria. As described in Cradle to Cradle® Certified CM Product Standard Version 3.0. The total % of recycled content varies per product and per colour which can be found on our website: [www.tarkett.com](http://www.tarkett.com)

\*\* ECONYL® is a yarn made from 100% regenerated content. The total % of regenerated content varies per product and per colour. Whether a colour contains ECONYL® and the exact % thereof can be found on our website: [www.tarkett.com](http://www.tarkett.com)

With EcoBase™  
backing

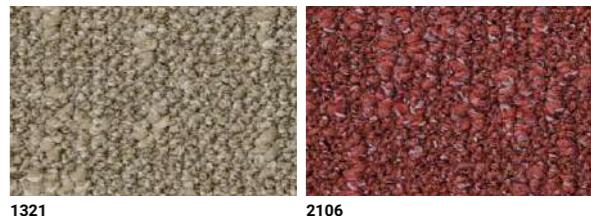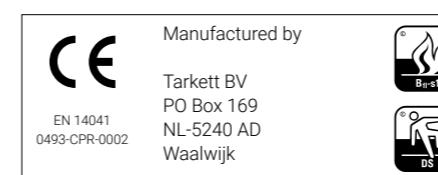

1321  
L 54,10 / LRV 22,07



2121  
L 18,32 / LRV 2,59



7083  
L 50,44 / LRV 18,79



8903  
L 42,77 / LRV 13,01




9501  
L 20,66 / LRV 3,16



9533  
L 35,68 / LRV 8,84



9950  
L 51,44 / LRV 19,65

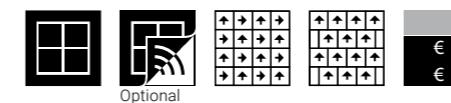

#### Preliminary specification according to EN 1307

|                               |  |               |
|-------------------------------|--|---------------|
| Type of manufacture           | Tufted 1/10 "  | ISO 2424      |
| Aspect                        | Structured loop pile   | ISO 2424      |
| Dye method                    | Solution dyed  |               |
| Dimension                     | 50 cm x 50 cm / 19.68" x 19.68" (20 tiles per box)                             | EN ISO 24342  |
| Primary backing               | Polyester fleece   | ISO 2424      |
| Secondary backing             | DESSO EcoBase® * - Contains on average 80% positively defined recycled content | ISO 2424      |
| Pile fibre composition        | BCF Polyamide 6 ECONYL® (ECONYL® is made from 100% regenerated content) **     | ISO 2424      |
| Total thickness               | 6.5 mm   | 0.3 inch      |
| Effective pile thickness      | 3.2 mm   | 0.13 inch     |
| Total mass                    | 4100 g/m²  | 121.0 oz/yd²  |
| Total pile mass               | 675 g/m²   | 19.9 oz/yd²   |
| Effective pile mass           | 415 g/m²   | 12.2 oz/yd²   |
| Pile density                  | 0.130 g/cm³  | 0.0047 lb/in³ |
| Number of tufts               | 1580 /dm²  | 132104 /yd²   |
| Stroll test                   | ≤ 2.0 kV   | ISO 6356      |
| Vertical resistance           | ≤ 1 x 10⁹ Ohm  | ISO 10965     |
| Use classification            | 33 Commercial - heavy use  | EN 1307       |
| Dimensional stability         | ≤ 0.2 %  | EN 986        |
| Impact sound reduction ΔLw    | 25 dB  | ISO 10140     |
| Noise reduction               | 0.15 a₃₀   | ISO 354       |
| Flammability                  | Bfl - s1 (loose laid tested)   | EN 13501-1    |
| Light Reflectance Value (LRV) | See right side page per colour   | BS 8493       |
| Colour Depth (L)              | See right side page per colour   | CIELAB        |

\* DESSO EcoBase® is a polyolefin based backing. Positively defined means: all ingredients have been assessed as either Green (optimal) or Yellow (tolerable) according to the Cradle to Cradle® assessment criteria. As described in Cradle to Cradle® Certified CM Product Standard Version 3.0. The total % of recycled content varies per product and per colour which can be found on our website: [www.tarkett.com](http://www.tarkett.com)

\*\* ECONYL® is a yarn made from 100% regenerated content. The total % of regenerated content varies per product and per colour. Whether a colour contains ECONYL® and the exact % thereof can be found on our website: [www.tarkett.com](http://www.tarkett.com)

With EcoBase™  
backing






#### Specification according to EN 1307

|                               |   |               |
|-------------------------------|---|---------------|
| Type of manufacture           | Tufted 1/8"   | ISO 2424      |
| Aspect                        | Cut pile  | ISO 2424      |
| Dye method                    | Piece dyed continuous                                 |               |
| Dimension                     | 50 cm x 50 cm / 19.68" x 19.68"<br>(16 tiles per box) | EN ISO 24342  |
| Primary backing               | Polyester fleece                                      | ISO 2424      |
| Secondary backing             | ProBase - modified bitumen                            | ISO 2424      |
| Pile fibre composition        | BCF Polyamide 6.6                                     | ISO 2424      |
| Total thickness               | 10.5 mm   | 0.4 inch      |
| Effective pile thickness      | 7.0 mm  | 0.28 inch     |
| Total mass                    | 4900 g/m²   | 144.6 oz/yd²  |
| Total pile mass               | 1540 g/m²   | 45.5 oz/yd²   |
| Effective pile mass           | 1200 g/m²   | 35.4 oz/yd²   |
| Pile density                  | 0.171 g/cm³   | 0.0062 lb/in³ |
| Number of tufts               | 1070 / dm²  | 89463 / yd²   |
| Stroll test                   | ≤ 2.0 kV  | ISO 6356      |
| Use classification            | 32 Commercial - general use                           | EN 1307       |
| Dimensional stability         | ≤ 0.2 %   | EN 986        |
| Impact sound reduction ΔLw    | 28 dB   | ISO 10140     |
| Noise reduction               | 0.20 αw   | ISO 354       |
| Flammability                  | Cfl - s1 (loose laid tested)                          | EN 13501-1    |
| Light Reflectance Value (LRV) | See right side page per colour                        | BS 8493       |
| Colour Depth (L)              | See right side page per colour                        | CIELAB        |


With ProBase™  
backing



With EcoBase™  
backing



Manufactured by  
Tarkett BV  
PO Box 169  
NL-5240 AD  
Waalwijk




1710 L 59,31 / LRV 27,37    2014 L 56,19 / LRV 24,10    2017 L 39,32 / LRV 10,85



2051 L 28,54 / LRV 5,66    2121 L 19,55 / LRV 2,88    2128 L 24,02 / LRV 4,11



2922 L 47,50 / LRV 16,41    2931 L 38,34 / LRV 10,28    3901 L 18,82 / LRV 2,70

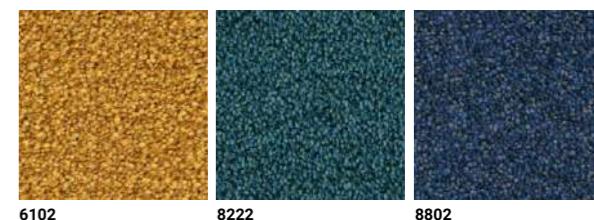

6102 L 53,65 / LRV 21,64    8222 L 35,89 / LRV 8,95    8802 L 30,70 / LRV 6,52



8811 L 24,90 / LRV 4,38    9013 L 37,77 / LRV 9,96    9022 L 20,57 / LRV 3,13




9092 L 23,44 / LRV 3,93    9095 L 39,65 / LRV 11,04    9107 L 67,99 / LRV 37,95



9111 L 21,20 / LRV 3,30    9501 L 21,73 / LRV 3,44    9502 L 35,55 / LRV 8,78



9517 L 58,86 / LRV 26,87    9531 L 18,20 / LRV 2,56    9533 L 48,86 / LRV 17,48



#### Preliminary specification according to EN 1307

|  |   |                           |
|--|---|---------------------------|
| Type of manufacture                    | Tufted 1/10 "   | ISO 2424                  |
| Aspect                                 | Structured loop pile  | ISO 2424                  |
| Dye method                             | Solution dyed   |                           |
| Dimension                              | L 61,54 cm x W 53,29 cm x S 30,77 cm<br>L 24,23" x W 20,98" x S 12,11"<br>(20 tiles / 4,9m <sup>2</sup> ) | EN ISO 24342              |
| Primary backing                        | Polyester fleece  | ISO 2424                  |
| Secondary backing                      | DESSO EcoBase® * - Contains on average 80% positively defined recycled content                            | ISO 2424                  |
| Pile fibre composition                 | BCF Polyamide 6 ECONYL®<br>(ECONYL® is made from 100% regenerated content) **                             | ISO 2424                  |
| Total thickness                        | 7.0 mm  | 0.3 inch                  |
| Effective pile thickness               | 4.0 mm  | 0.16 inch                 |
| Total mass                             | 4450 g/m <sup>2</sup>   | 131.3 oz/yd <sup>2</sup>  |
| Total pile mass                        | 800 g/m <sup>2</sup>  | 23.6 oz/yd <sup>2</sup>   |
| Effective pile mass                    | 625 g/m <sup>2</sup>  | 18.4 oz/yd <sup>2</sup>   |
| Pile density                           | 0.156 g/cm <sup>3</sup>   | 0.0056 lb/in <sup>3</sup> |
| Number of tufts                        | 1890 /dm <sup>2</sup>   | 158023 /yd <sup>2</sup>   |
| Stroll test                            | ≤ 2.0 kV  | ISO 6356                  |
| Vertical resistance                    | ≤ 1 x 10 <sup>9</sup> Ohm   | ISO 10965                 |
| Use classification                     | 33 Commercial - heavy use   | EN 1307                   |
| Dimensional stability                  | ≤ 0.2 %   | EN 986                    |
| Impact sound reduction ΔL <sub>w</sub> | 24 dB   | ISO 10140                 |
| Noise reduction                        | 0.20 α <sub>w</sub>   | ISO 354                   |
| Flammability                           | B <sub>f1</sub> - s1 (loose laid tested)  | EN 13501-1                |
| Light Reflectance Value (LRV)          | See right side page per colour  | BS 8493                   |
| Colour Depth (L)                       | See right side page per colour  | CIELAB                    |

\* DESSO EcoBase® is a polyolefin based backing. Positively defined means: all ingredients have been assessed as either Green (optimal) or Yellow (tolerable) according to the Cradle to Cradle® assessment criteria. As described in Cradle to Cradle® Certified CM Product Standard Version 3.0. The total % of recycled content varies per product and per colour which can be found on our website: [www.tarkett.com](http://www.tarkett.com)

\*\* ECONYL® is a yarn made from 100% regenerated content. The total % of regenerated content varies per product and per colour. Whether a colour contains ECONYL® and the exact % thereof can be found on our website: [www.tarkett.com](http://www.tarkett.com)

With EcoBase™  
backing



8522  
L 38,71 / LRV 10,50



8836



9022  
L 33,31 / LRV 7,68




9514  
L 48,94 / LRV 17,55



#### Specification according to EN 1307

|  |   |                           |
|--|---|---------------------------|
| Type of manufacture                    | Tufted 1/10 "   | ISO 2424                  |
| Aspect                                 | Structured loop pile  | ISO 2424                  |
| Dye method                             | Solution dyed   |                           |
| Dimension                              | 50 cm x 50 cm / 19.68" x 19.68"<br>(20 tiles per box)                 | EN ISO 24342              |
| Primary backing                        | Polyester fleece  | ISO 2424                  |
| Secondary backing                      | ProBase, contains on average 80% positively defined recycled content. | ISO 2424                  |
| Pile fibre composition                 | BCF Polyamide 6, contains 75% recycled content                        | ISO 2424                  |
| Total thickness                        | 6.0 mm  | 0.2 inch                  |
| Effective pile thickness               | 2,9 mm  | 0.11 inch                 |
| Total mass                             | 3900 g/m <sup>2</sup>   | 115.1 oz/yd <sup>2</sup>  |
| Total pile mass                        | 610 g/m <sup>2</sup>  | 18 oz/yd <sup>2</sup>     |
| Effective pile mass                    | 370 g/m <sup>2</sup>  | 10.9 oz/yd <sup>2</sup>   |
| Pile density                           | 0.128 g/cm <sup>3</sup>   | 0.0046 lb/in <sup>3</sup> |
| Number of tufts                        | 1580 /dm <sup>2</sup>   | 132104 /yd <sup>2</sup>   |
| Stroll test                            | ≤ 2.0 KV  | ISO 6356                  |
| Vertical resistance                    | ≤ 1 x 10 <sup>9</sup> Ohm   | ISO 10965                 |
| Use classification                     | 33 Commercial - heavy use   | EN 1307                   |
| Dimensional stability                  | ≤ 0.2 %   | EN 986                    |
| Impact sound reduction ΔL <sub>w</sub> | 24 dB   | ISO 10140                 |
| Noise reduction                        | 0.15 a <sub>w</sub>   | ISO 354                   |
| Flammability                           | B <sub>f1</sub> - s1 (loose laid tested)                              | EN 13501-1                |
| Light Reflectance Value (LRV)          | See right side page per colour  | BS 8493                   |
| Colour Depth (L)                       | See right side page per colour  | CIELAB                    |

With ProBase™  
backing      With EcoBase™  
backing

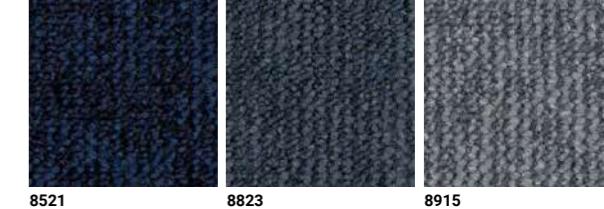







## Specification according to EN 1307

|                               |  |               |
|-------------------------------|--|---------------|
| Type of manufacture           | Tufted 1/10 "  | ISO 2424      |
| Aspect                        | Structured loop pile   | ISO 2424      |
| Dye method                    | Solution dyed  |               |
| Dimension                     | 50 cm x 50 cm / 19.68" x 19.68"<br>(20 tiles per box)                          | EN ISO 24342  |
| Primary backing               | Colback® Gold Polyester fleece   | ISO 2424      |
| Secondary backing             | DESSO EcoBase® * - Contains on average 80% positively defined recycled content | ISO 2424      |
| Pile fibre composition        | BCF Polyamide 6 ECONYL®<br>(ECONYL® is made from 100% regenerated content) **  | ISO 2424      |
| Total thickness               | 6.5 mm   | 0.3 inch      |
| Effective pile thickness      | 3.0 mm   | 0.12 inch     |
| Total mass                    | 4150 g/m²  | 122.5 oz/yd²  |
| Total pile mass               | 685 g/m²   | 20.2 oz/yd²   |
| Effective pile mass           | 425 g/m²   | 12.5 oz/yd²   |
| Pile density                  | 0.142 g/cm³  | 0.0051 lb/in³ |
| Number of tufts               | 1580 /dm²  | 132104 /yd²   |
| Stroll test                   | ≤ 2.0 kV   | ISO 6356      |
| Vertical resistance           | ≤ 1 x 10⁹ Ohm  | ISO 10965     |
| Use classification            | 33 Commercial - heavy use  | EN 1307       |
| Dimensional stability         | ≤ 0.2 %  | EN 986        |
| Impact sound reduction ΔLw    | 23 dB  | ISO 10140     |
| Noise reduction               | 0.15 a <sub>w</sub>  | ISO 354       |
| Flammability                  | B <sub>f1</sub> - s1 (loose laid tested)                                       | EN 13501-1    |
| Light Reflectance Value (LRV) | See right side page per colour   | BS 8493       |
| Colour Depth (L)              | See right side page per colour   | CIELAB        |

\* DESSO EcoBase® is a polyolefin based backing. Positively defined means: all ingredients have been assessed as either Green (optimal) or Yellow (tolerable) according to the Cradle to Cradle® assessment criteria. As described in Cradle to Cradle® Certified CM Product Standard Version 3.0. The total % of recycled content varies per product and per colour which can be found on our website: [www.tarkett.com](http://www.tarkett.com)

\*\* ECONYL® is a yarn made from 100% regenerated content. The total % of regenerated content varies per product and per colour. Whether a colour contains ECONYL® and the exact % thereof can be found on our website: [www.tarkett.com](http://www.tarkett.com)

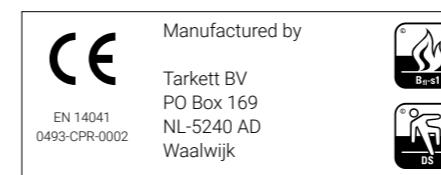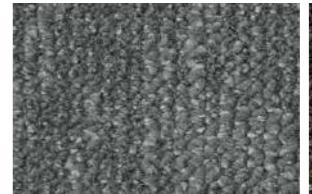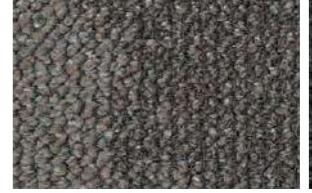With EcoBase™  
backing5227  
L 33,59 / LRV 7,827082  
L 50,31 / LRV 18,688834  
L 49,62 / LRV 18,108901  
L 44,18 / LRV 13,979033  
L 38,44 / LRV 10,339092  
L 25,55 / LRV 4,609097  
L 56,21 / LRV 24,199501  
L 27,28 / LRV 5,199525  
L 49,09 / LRV 17,679940  
L 50,95 / LRV 19,239970  
L 38,06 / LRV 10,129990  
L 21,51 / LRV 3,38

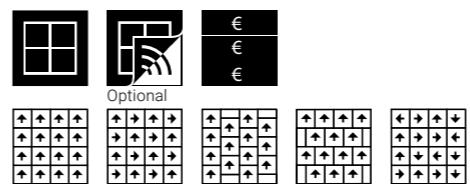

## Specification according to EN 1307

|                               |  |               |
|-------------------------------|--|---------------|
| Type of manufacture           | Tufted 1/10 "  | ISO 2424      |
| Aspect                        | Structured loop pile   | ISO 2424      |
| Dye method                    | Solution dyed  |               |
| Dimension                     | 50 cm x 50 cm / 19.68" x 19.68"<br>(20 tiles per box)                          | EN ISO 24342  |
| Primary backing               | Polyester fleece   | ISO 2424      |
| Secondary backing             | DESSO EcoBase® * - Contains on average 80% positively defined recycled content | ISO 2424      |
| Pile fibre composition        | BCF Polyamide 6 ECONYL®<br>(ECONYL® is made from 100% regenerated content) **  | ISO 2424      |
| Total thickness               | 6.5 mm   | 0.3 inch      |
| Effective pile thickness      | 3.6 mm   | 0.14 inch     |
| Total mass                    | 4050 g/m²  | 119.5 oz/yd²  |
| Total pile mass               | 700 g/m²   | 20.7 oz/yd²   |
| Effective pile mass           | 515 g/m²   | 15.2 oz/yd²   |
| Pile density                  | 0.143 g/cm³  | 0.0052 lb/in³ |
| Number of tufts               | 1580 /dm²  | 132104 /yd²   |
| Stroll test                   | ≤ 2.0 kV   | ISO 6356      |
| Vertical resistance           | ≤ 1 x 10⁹ Ohm  | ISO 10965     |
| Use classification            | 33 Commercial - heavy use  | EN 1307       |
| Dimensional stability         | ≤ 0.2 %  | EN 986        |
| Impact sound reduction ΔLw    | 23 dB  | ISO 10140     |
| Noise reduction               | 0.15 a <sub>w</sub>  | ISO 354       |
| Flammability                  | B <sub>f1</sub> - s1 (loose laid tested)                                       | EN 13501-1    |
| Light Reflectance Value (LRV) | See right side page per colour   | BS 8493       |
| Colour Depth (L)              | See right side page per colour   | CIELAB        |

\* DESSO EcoBase® is a polyolefin based backing. Positively defined means: all ingredients have been assessed as either Green (optimal) or Yellow (tolerable) according to the Cradle to Cradle® assessment criteria. As described in Cradle to Cradle® Certified CM Product Standard Version 3.0. The total % of recycled content varies per product and per colour which can be found on our website: [www.tarkett.com](http://www.tarkett.com)

\*\* ECONYL® is a yarn made from 100% regenerated content. The total % of regenerated content varies per product and per colour. Whether a colour contains ECONYL® and the exact % thereof can be found on our website: [www.tarkett.com](http://www.tarkett.com)

With EcoBase™  
backing



2086  
L 40,83 / LRV 11,76

2913  
L 44,99 / LRV 14,53




2932  
L 39,32 / LRV 10,85

2956  
L 52,23 / LRV 20,35




5423  
L 50,96 / LRV 19,23

6023  
L 49,25 / LRV 17,80

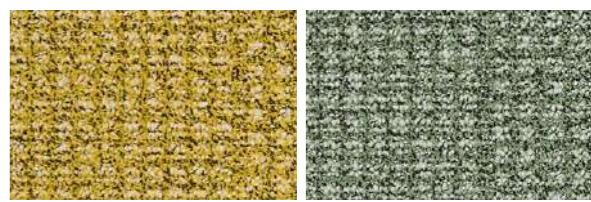


6218  
L 52,68 / LRV 20,75

7843  
L 45,48 / LRV 14,89

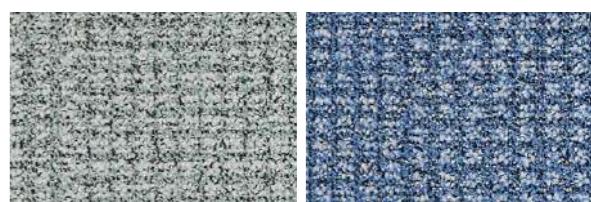

7915  
L 54,53 / LRV 22,48


8423  
L 43,16 / LRV 13,27

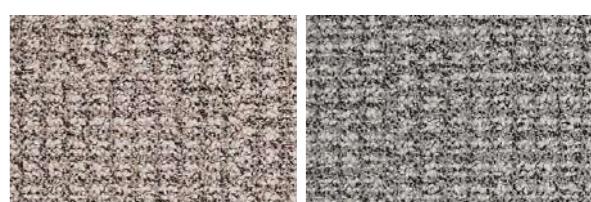

9116  
L 50,92 / LRV 19,20


9935  
L 48,99 / LRV 17,59

### 3D TEXTURES





**DESSO x RENS 7258 Hopscotch**



Specification according to EN 1307


|                                     |   |                        |
|-------------------------------------|---|------------------------|
| Type of manufacture                 | Tufted 1/10 "   | ISO 2424               |
| Aspect                              | Loop pile   | ISO 2424               |
| Dye method                          | Solution dyed + Print   |                        |
| Dimension                           | 50 cm x 50 cm / 19.68" x 19.68"<br>(20 tiles per box)                             | EN ISO 24342           |
| Primary backing                     | Polyester fleece  | ISO 2424               |
| Secondary backing                   | DESSO EcoBase® * - Contains on average 80% positively defined recycled content    | ISO 2424               |
| Pile fibre composition              | BCF Polyamide 6 and ECONYL®<br>(ECONYL® is made from 100% regenerated content) ** | ISO 2424               |
| Total thickness                     | 5.5 - 6.5 mm  | 0.22 - 0.26 inch       |
| Effective pile thickness            | 2.5 - 2.8 mm  | 0.10 - 0.11 inch       |
| Total mass                          | 3900 - 4250 g/m²  | 115.1 - 125.4 oz/yd²   |
| Total pile mass                     | 550 - 730 g/m²  | 16.2 - 21.5 oz/yd²     |
| Effective pile mass                 | 340 - 415 g/m²  | 10.0 - 12.2 oz/yd²     |
| Pile density                        | 0.136 - 0.148 g/cm³   | 0.0049 - 0.0054 lb/in³ |
| Number of tufts                     | 1580 /dm²   | 132104 /yd²            |
| Stroll test                         | ≤ 2.0 kV  | ISO 6356               |
| Vertical resistance                 | -   | ISO 10965              |
| Use classification                  | -   | EN 1307                |
| Dimensional stability               | -   | EN 986                 |
| Impact sound reduction $\Delta L_w$ | -   | ISO 10140              |
| Noise reduction                     | -   | ISO 354                |
| Flammability                        | B - s1 (loose laid tested)  | EN 13501-1             |

- \* DESSO EcoBase® is a polyolefin based backing. Positively defined means: all ingredients have been assessed as either Green (optimal) or Yellow (tolerable) according to the Cradle to Cradle® assessment criteria. As described in Cradle to Cradle® Certified CM Product Standard Version 3.0. The total % of recycled content varies per product and per colour which can be found on our website: [www.tarkett.com](http://www.tarkett.com)


\*\* ECONYL® is a yarn made from 100% regenerated content. The total % of regenerated content varies per product and per colour. Whether a colour contains ECONYL® and the exact % thereof can be found on our website: [www.tarkett.com](http://www.tarkett.com)



 Manufactured by  
Tarkett BV  
PO Box 169  
NL-5240 AD  
Waalwijk




Colour fastness  
to artificial light  
according to ISO  
105-B02: ≥ 4

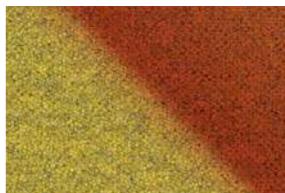

7258 Hopscotch




3007 Tangram

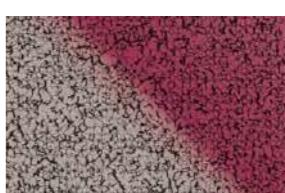

9950 Checkers




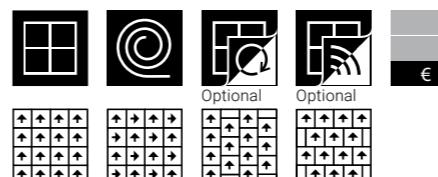

#### Specification according to EN 1307

|                               |   |               |
|-------------------------------|---|---------------|
| Type of manufacture           | Tufted 1/10 "   | ISO 2424      |
| Aspect                        | Structured loop pile                                  | ISO 2424      |
| Dye method                    | Solution dyed   |               |
| Dimension                     | 50 cm x 50 cm / 19.68" x 19.68"<br>(20 tiles per box) | EN ISO 24342  |
| Primary backing               | Polyester fleece                                      | ISO 2424      |
| Secondary backing             | ProBase - modified bitumen                            | ISO 2424      |
| Pile fibre composition        | BCF Polyamide 6                                       | ISO 2424      |
| Total thickness               | 5.5 mm  | 0.2 inch      |
| Effective pile thickness      | 2.6 mm  | 0.10 inch     |
| Total mass                    | 3900 g/m²   | 115.1 oz/yd²  |
| Total pile mass               | 500 g/m²  | 14.8 oz/yd²   |
| Effective pile mass           | 310 g/m²  | 9.1 oz/yd²    |
| Pile density                  | 0.119 g/cm³   | 0.0043 lb/in³ |
| Number of tufts               | 1580 /dm²   | 132104 /yd²   |
| Stroll test                   | ≤ 2.0 kV  | ISO 6356      |
| Use classification            | 33 Commercial - heavy use                             | EN 1307       |
| Dimensional stability         | ≤ 0.2 %   | EN 986        |
| Impact sound reduction ΔLw    | 24 dB   | ISO 10140     |
| Noise reduction               | 0.15 αw   | ISO 354       |
| Flammability                  | Bfl - s1 (loose laid tested)                          | EN 13501-1    |
| Light Reflectance Value (LRV) | See right side page per colour                        | BS 8493       |
| Colour Depth (L)              | See right side page per colour                        | CIELAB        |

With ProBase™  
backing      With EcoBase™  
backing

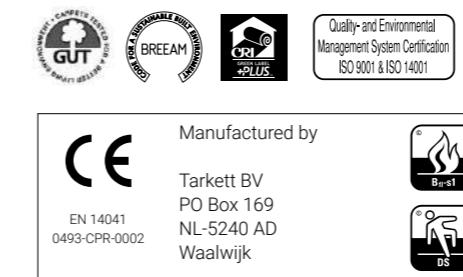

2915  
L 55,20 / LRV 23,12

2923  
L 50,35 / LRV 18,71



2925  
L 47,35 / LRV 16,29

3820  
L 31,83 / LRV 7,01



3842  
L 19,12 / LRV 2,78

4218  
L 27,15 / LRV 5,15



4413  
L 36,45 / LRV 9,24

5012  
L 37,43 / LRV 9,77



5420  
L 52,77 / LRV 20,84

6408  
L 56,31 / LRV 24,22



7075  
L 42,06 / LRV 12,54

7123  
L 42,77 / LRV 13,01



8012  
L 38,56 / LRV 10,40


8413  
L 34,90 / LRV 8,45



8803  
L 29,90 / LRV 6,19

8904  
L 45,88 / LRV 15,18




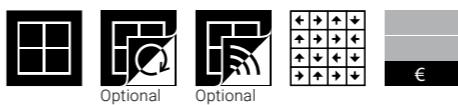

## Specification according to EN 1307


|  |   |              |
|--|---|--------------|
| Type of manufacture                    | Tufted 1/10 "   | ISO 2424     |
| Aspect                                 | Structured loop pile                                  | ISO 2424     |
| Dye method                             | Solution dyed   |              |
| Dimension                              | 50 cm x 50 cm / 19.68" x 19.68"<br>(20 tiles per box) | EN ISO 24342 |
| Primary backing                        | Polyester fleece                                      | ISO 2424     |
| Secondary backing                      | ProBase - modified bitumen                            | ISO 2424     |
| Pile fibre composition                 | BCF Polyamide 6                                       | ISO 2424     |
| Total thickness                        | 6.5 mm 0.3 inch                                       | ISO 1765     |
| Effective pile thickness               | 3.0 mm 0.12 inch                                      | ISO 1766     |
| Total mass                             | 4050 g/m <sup>2</sup> 119.5 oz/yd <sup>2</sup>        | ISO 8543     |
| Total pile mass                        | 580 g/m <sup>2</sup> 17.1 oz/yd <sup>2</sup>          | ISO 2424     |
| Effective pile mass                    | 360 g/m <sup>2</sup> 10.6 oz/yd <sup>2</sup>          | ISO 8543     |
| Pile density                           | 0.120 g/cm <sup>3</sup> 0.0043 lb/in <sup>3</sup>     | ISO 8543     |
| Number of tufts                        | 1580 /dm <sup>2</sup> 132104 /yd <sup>2</sup>         | ISO 1763     |
| Stroll test                            | ≤ 2.0 kV  | ISO 6356     |
| Use classification                     | 33 Commercial - heavy use                             | EN 1307      |
| Dimensional stability                  | ≤ 0.2 %   | EN 986       |
| Impact sound reduction ΔL <sub>w</sub> | 25 dB   | ISO 10140    |
| Noise reduction                        | 0.20 α <sub>w</sub>                                   | ISO 354      |
| Flammability                           | B <sub>f</sub> - s1 (loose laid tested)               | EN 13501-1   |
| Light Reflectance Value (LRV)          | See right side page per colour                        | BS 8493      |
| Colour Depth (L)                       | See right side page per colour                        | CIELAB       |

With ProBase™  
backing      With EcoBase™  
backing

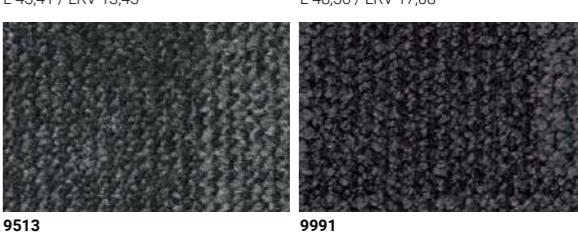

## Essence Elements Collection




Essence Pure

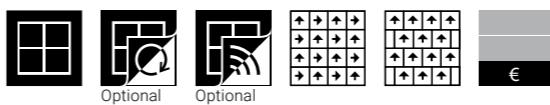

### Specification according to EN 1307


|  |   |                           |
|--|---|---------------------------|
| Type of manufacture                    | Tufted 1/10 "   | ISO 2424                  |
| Aspect                                 | Loop pile   | ISO 2424                  |
| Dye method                             | Solution dyed   |                           |
| Dimension                              | 50 cm x 50 cm / 19.68" x 19.68"<br>(20 tiles per box) | EN ISO 24342              |
| Primary backing                        | Polyester fleece                                      | ISO 2424                  |
| Secondary backing                      | ProBase - modified bitumen                            | ISO 2424                  |
| Pile fibre composition                 | BCF Polyamide 6                                       | ISO 2424                  |
| Total thickness                        | 6.0 mm  | 0.2 inch                  |
| Effective pile thickness               | 2.7 mm  | 0.11 inch                 |
| Total mass                             | 3900 g/m <sup>2</sup>                                 | 115.1 oz/yd <sup>2</sup>  |
| Total pile mass                        | 500 g/m <sup>2</sup>                                  | 14.8 oz/yd <sup>2</sup>   |
| Effective pile mass                    | 325 g/m <sup>2</sup>                                  | 9.6 oz/yd <sup>2</sup>    |
| Pile density                           | 0.120 g/cm <sup>3</sup>                               | 0.0043 lb/in <sup>3</sup> |
| Number of tufts                        | 1580 /dm <sup>2</sup>                                 | 132104 /yd <sup>2</sup>   |
| Stroll test                            | ≤ 2.0 kV  | ISO 6356                  |
| Use classification                     | 33 Commercial - heavy use                             | EN 1307                   |
| Dimensional stability                  | ≤ 0.2 %   | EN 986                    |
| Impact sound reduction ΔL <sub>w</sub> | 26 dB   | ISO 10140                 |
| Noise reduction                        | 0.15 a <sub>w</sub>                                   | ISO 354                   |
| Flammability                           | B <sub>f</sub> - s1 (loose laid tested)               | EN 13501-1                |
| Light Reflectance Value (LRV)          | See right side page per colour                        | BS 8493                   |
| Colour Depth (L)                       | See right side page per colour                        | CIELAB                    |

With ProBase™  
backing      With EcoBase™  
backing

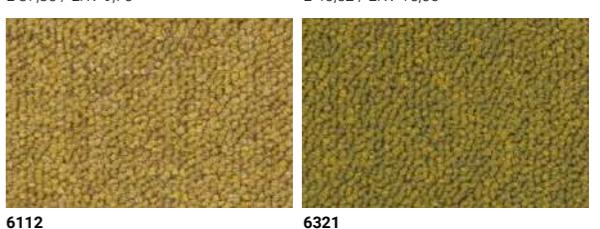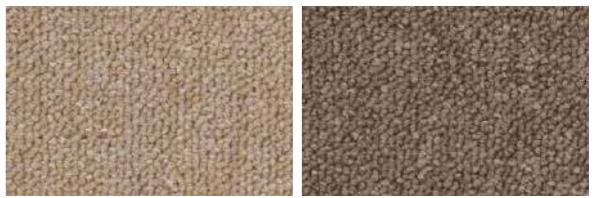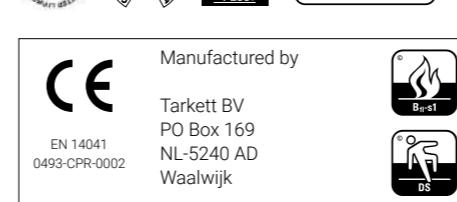

3D TEXTURES

Essence Pure



A




## Essence Elements Collection


Essence Pure



**8915**  
L 50,59 / LRV 18,92

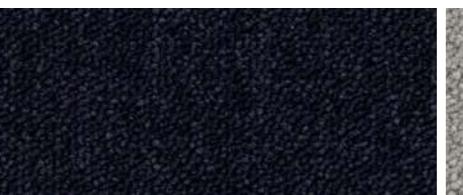


**9022**  
L 18,79 / LRV 2,70

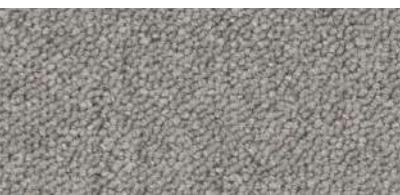


**9044**  
L 57,79 / LRV 25,74




**9083**  
L 38,00 / LRV 10,09

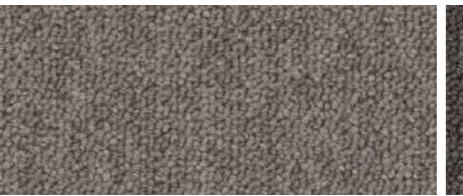

**9104**  
L 48,71 / LRV 17,36

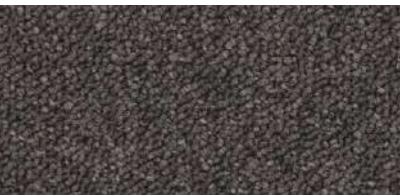


**9111**  
L 34,61 / LRV 8,30

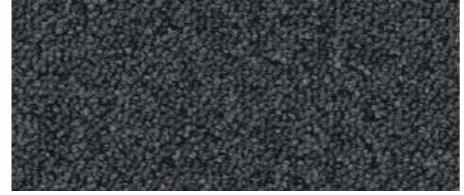


**9512**  
L 31,52 / LRV 6,87




**9526**  
L 57,38 / LRV 25,31

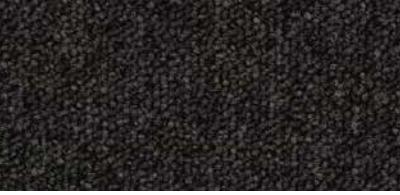


**9531**  
L 24,43 / LRV 4,23

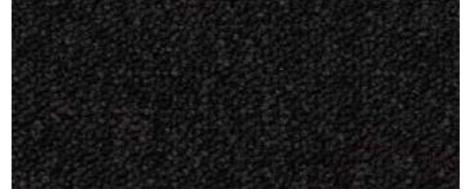

**9850**  
L 17,20 / LRV 2,34

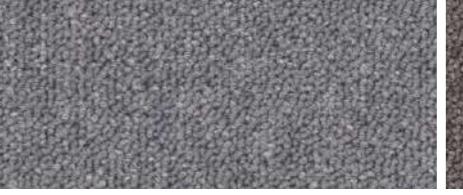


**9945**  
L 51,79 / LRV 19,96

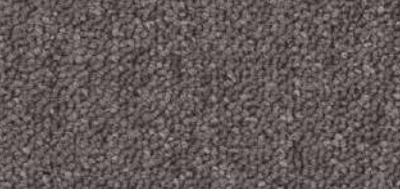

**9960**  
L 43,50 / LRV 13,50

Essence Pure



A






## Essence Elements Collection



## Specification according to EN 1307


|  |   |                           |
|--|---|---------------------------|
| Type of manufacture                    | Tufted 1/10 "   | ISO 2424                  |
| Aspect                                 | Structured loop pile                                  | ISO 2424                  |
| Dye method                             | Solution dyed   |                           |
| Dimension                              | 50 cm x 50 cm / 19.68" x 19.68"<br>(20 tiles per box) | EN ISO 24342              |
| Primary backing                        | Polyester fleece                                      | ISO 2424                  |
| Secondary backing                      | ProBase - modified bitumen                            | ISO 2424                  |
| Pile fibre composition                 | BCF Polyamide 6                                       | ISO 2424                  |
| Total thickness                        | 6.5 mm  | 0.3 inch                  |
| Effective pile thickness               | 3.4 mm  | 0.13 inch                 |
| Total mass                             | 4050 g/m <sup>2</sup>                                 | 119.5 oz/yd <sup>2</sup>  |
| Total pile mass                        | 580 g/m <sup>2</sup>                                  | 17.1 oz/yd <sup>2</sup>   |
| Effective pile mass                    | 380 g/m <sup>2</sup>                                  | 11.2 oz/yd <sup>2</sup>   |
| Pile density                           | 0.112 g/cm <sup>3</sup>                               | 0.0040 lb/in <sup>3</sup> |
| Number of tufts                        | 1580 /dm <sup>2</sup>                                 | 132104 /yd <sup>2</sup>   |
| Stroll test                            | ≤ 2.0 kV  | ISO 6356                  |
| Use classification                     | 33 Commercial - heavy use                             | EN 1307                   |
| Dimensional stability                  | ≤ 0.2 %   | EN 986                    |
| Impact sound reduction ΔL <sub>w</sub> | 25 dB   | ISO 10140                 |
| Noise reduction                        | 0.20 α <sub>w</sub>                                   | ISO 354                   |
| Flammability                           | B <sub>f1</sub> - s1 (loose laid tested)              | EN 13501-1                |
| Light Reflectance Value (LRV)          | See right side page per colour                        | BS 8493                   |
| Colour Depth (L)                       | See right side page per colour                        | CIELAB                    |

With ProBase™  
backing      With EcoBase™  
backing

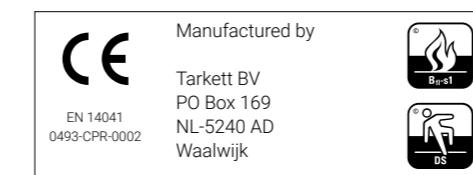

2032  
L 52,17 / LRV 20,30

2085  
L 54,74 / LRV 22,68

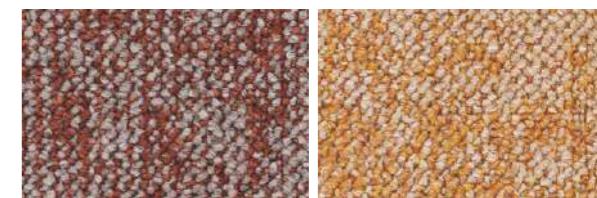

2088  
L 39,13 / LRV 10,73

5412  
L 53,95 / LRV 21,93



6322  
L 52,39 / LRV 20,49

7284  
L 52,65 / LRV 20,73



7803  
L 46,63 / LRV 15,74

8913  
L 43,56 / LRV 13,54



9513  
L 45,16 / LRV 14,66

9532  
L 41,57 / LRV 12,22



9851  
L 25,91 / LRV 4,72





9961  
L 51,69 / LRV 19,87




## Specification according to EN 1307

|  |   |              |
|--|---|--------------|
| Type of manufacture                    | Tufted 1/10 "   | ISO 2424     |
| Aspect                                 | Loop pile   | ISO 2424     |
| Dye method                             | Solution dyed   |              |
| Dimension                              | 50 cm x 50 cm / 19.68" x 19.68"<br>(20 tiles per box) | EN ISO 24342 |
| Primary backing                        | Polyester fleece                                      | ISO 2424     |
| Secondary backing                      | ProBase - modified bitumen                            | ISO 2424     |
| Pile fibre composition                 | BCF Polyamide 6                                       | ISO 2424     |
| Total thickness                        | 5.5 mm 0.2 inch                                       | ISO 1765     |
| Effective pile thickness               | 2.6 mm 0.10 inch                                      | ISO 1766     |
| Total mass                             | 3900 g/m <sup>2</sup> 115.1 oz/yd <sup>2</sup>        | ISO 8543     |
| Total pile mass                        | 500 g/m <sup>2</sup> 14.8 oz/yd <sup>2</sup>          | ISO 2424     |
| Effective pile mass                    | 310 g/m <sup>2</sup> 9.1 oz/yd <sup>2</sup>           | ISO 8543     |
| Pile density                           | 0.119 g/cm <sup>3</sup> 0.0043 lb/in <sup>3</sup>     | ISO 8543     |
| Number of tufts                        | 1580 /dm <sup>2</sup> 132104 /yd <sup>2</sup>         | ISO 1763     |
| Stroll test                            | ≤ 2.0 kV  | ISO 6356     |
| Use classification                     | 33 Commercial - heavy use                             | EN 1307      |
| Dimensional stability                  | ≤ 0.2 %   | EN 986       |
| Impact sound reduction ΔL <sub>w</sub> | 24 dB   | ISO 10140    |
| Noise reduction                        | 0.15 α <sub>w</sub>                                   | ISO 354      |
| Flammability                           | B <sub>f</sub> - s1 (loose laid tested)               | EN 13501-1   |
| Light Reflectance Value (LRV)          | See right side page per colour                        | BS 8493      |
| Colour Depth (L)                       | See right side page per colour                        | CIELAB       |

With ProBase™  
backing      With EcoBase™  
backing

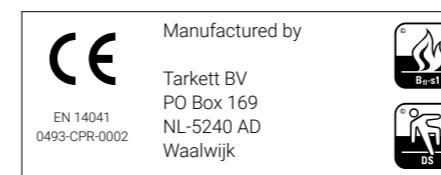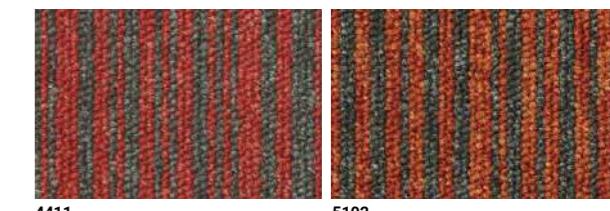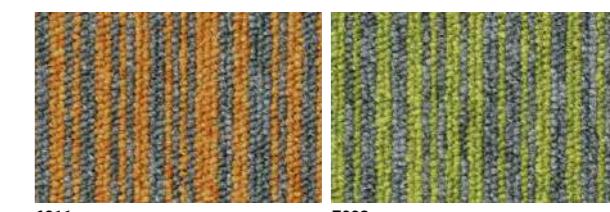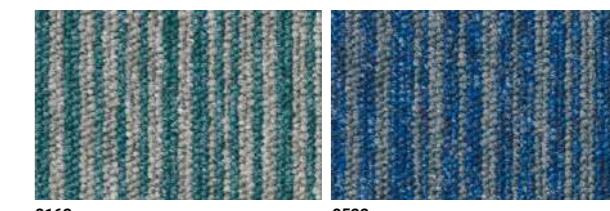2933  
L 29,14 / LRV 5,893211  
L 33,08 / LRV 7,574411  
L 33,36 / LRV 7,705102  
L 34,92 / LRV 8,466011  
L 48,69 / LRV 17,347003  
L 50,56 / LRV 18,898162  
L 45,44 / LRV 14,868522  
L 39,81 / LRV 11,149093  
L 46,40 / LRV 15,579502  
L 33,48 / LRV 7,769514  
L 45,40 / LRV 14,839982  
L 21,37 / LRV 3,34

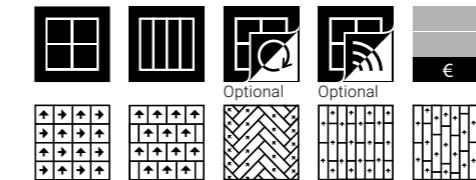


## Specification according to EN 1307

|                               |   |              |
|-------------------------------|---|--------------|
| Type of manufacture           | Tufted 1/10 "   | ISO 2424     |
| Aspect                        | Structured loop pile  | ISO 2424     |
| Dye method                    | Solution dyed   |              |
| Dimension                     | 50 cm x 50 cm & 100 cm x 25 cm / 19.68" x 19.68" & 39.36" x 9.84"<br>(20 tiles or planks per box) | EN ISO 24342 |
| Primary backing               | Polyester fleece  | ISO 2424     |
| Secondary backing             | ProBase - modified bitumen  | ISO 2424     |
| Pile fibre composition        | BCF Polyamide 6   | ISO 2424     |
| Total thickness               | 6.5 mm 0.3 inch   | ISO 1765     |
| Effective pile thickness      | 2.8 mm 0.11 inch  | ISO 1766     |
| Total mass                    | 4050 g/m² 119.5 oz/yd²  | ISO 8543     |
| Total pile mass               | 580 g/m² 17.1 oz/yd²  | ISO 2424     |
| Effective pile mass           | 320 g/m² 9.4 oz/yd²   | ISO 8543     |
| Pile density                  | 0.114 g/cm³ 0.0041 lb/in³   | ISO 8543     |
| Number of tufts               | 1580 /dm² 132104 /yd²   | ISO 1763     |
| Stroll test                   | ≤ 2.0 kV  | ISO 6356     |
| Use classification            | 33 Commercial - heavy use   | EN 1307      |
| Dimensional stability         | ≤ 0.2 %   | EN 986       |
| Impact sound reduction ΔLw    | 24 dB   | ISO 10140    |
| Noise reduction               | 0.15 αw   | ISO 354      |
| Flammability                  | Bfl - s1 (loose laid tested)  | EN 13501-1   |
| Light Reflectance Value (LRV) | See right side page per colour  | BS 8493      |
| Colour Depth (L)              | See right side page per colour  | CIELAB       |

With ProBase™  
backing      With EcoBase™  
backing



1660 L 51,12 / LRV 19,37      5012 L 38,04 / LRV 10,11

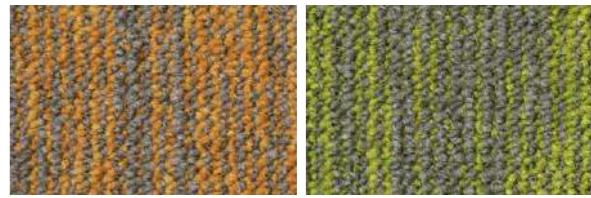

6017 L 48,62 / LRV 17,29      7017 L 50,09 / LRV 18,49



7511 L 39,24 / LRV 10,80      9502 L 23,30 / LRV 3,89



9504 L 47,58 / LRV 16,46      9505 L 32,69 / LRV 7,40



9507 L 37,56 / LRV 9,84      9521 L 34,99 / LRV 8,49



9930 L 48,90 / LRV 17,52      9965 L 40,36 / LRV 11,47






Essence Traces 1511, Essence Pure 1510



## Specification according to EN 1307

|  |   |              |
|--|---|--------------|
| Type of manufacture                    | Tufted 1/10 "   | ISO 2424     |
| Aspect                                 | Structured loop pile                                  | ISO 2424     |
| Dye method                             | Solution dyed   |              |
| Dimension                              | 50 cm x 50 cm / 19.68" x 19.68"<br>(20 tiles per box) | EN ISO 24342 |
| Primary backing                        | Polyester fleece                                      | ISO 2424     |
| Secondary backing                      | ProBase - modified bitumen                            | ISO 2424     |
| Pile fibre composition                 | BCF Polyamide 6                                       | ISO 2424     |
| Total thickness                        | 6.0 mm 0.2 inch                                       | ISO 1765     |
| Effective pile thickness               | 2.6 mm 0.10 inch                                      | ISO 1766     |
| Total mass                             | 4050 g/m <sup>2</sup> 119.5 oz/yd <sup>2</sup>        | ISO 8543     |
| Total pile mass                        | 580 g/m <sup>2</sup> 17.1 oz/yd <sup>2</sup>          | ISO 2424     |
| Effective pile mass                    | 315 g/m <sup>2</sup> 9.3 oz/yd <sup>2</sup>           | ISO 8543     |
| Pile density                           | 0.121 g/cm <sup>3</sup> 0.0044 lb/in <sup>3</sup>     | ISO 8543     |
| Number of tufts                        | 1580 /dm <sup>2</sup> 132104 /yd <sup>2</sup>         | ISO 1763     |
| Stroll test                            | ≤ 2.0 kV  | ISO 6356     |
| Use classification                     | 33 Commercial - heavy use                             | EN 1307      |
| Dimensional stability                  | ≤ 0.2 %   | EN 986       |
| Impact sound reduction ΔL <sub>w</sub> | 26 dB   | ISO 10140    |
| Noise reduction                        | 0.20 α <sub>w</sub>                                   | ISO 354      |
| Flammability                           | B <sub>f</sub> - s1 (loose laid tested)               | EN 13501-1   |
| Light Reflectance Value (LRV)          | See right side page per colour                        | BS 8493      |
| Colour Depth (L)                       | See right side page per colour                        | CIELAB       |

## Essence Elements Collection

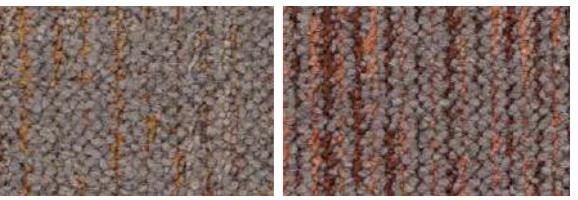

1511 L 48,71 / LRV 17,36 9105 L 46,22 / LRV 15,43



9112 L 33,98 / LRV 8,00 9527 L 48,46 / LRV 17,16



9528 L 42,27 / LRV 12,68 9946 L 47,29 / LRV 16,24

3D TEXTURES


With ProBase™  
backing




With EcoBase™  
backing



Quality- and Environmental  
Management System Certification  
ISO 9001 & ISO 14001










#### Specification according to EN 1307

|                               |  |              |
|-------------------------------|--|--------------|
| Type of manufacture           | Tufted 1/10 "  | ISO 2424     |
| Aspect                        | Structured loop pile   | ISO 2424     |
| Dye method                    | Solution dyed  |              |
| Dimension                     | 50 cm x 50 cm / 19.68" x 19.68"<br>(20 tiles per box)                          | EN ISO 24342 |
| Primary backing               | Polyester fleece   | ISO 2424     |
| Secondary backing             | DESSO EcoBase® * - Contains on average 80% positively defined recycled content | ISO 2424     |
| Pile fibre composition        | BCF Polyamide 6 ECONYL®<br>(ECONYL® is made from 100% regenerated content) **  | ISO 2424     |
| Total thickness               | 6.5 mm 0.3 inch  | ISO 1765     |
| Effective pile thickness      | 2.8 mm 0.11 inch   | ISO 1766     |
| Total mass                    | 4250 g/m² 125.4 oz/yd²   | ISO 8543     |
| Total pile mass               | 730 g/m² 21.5 oz/yd²   | ISO 2424     |
| Effective pile mass           | 415 g/m² 12.2 oz/yd²   | ISO 8543     |
| Pile density                  | 0.148 g/cm³ 0.0054 lb/in³  | ISO 8543     |
| Number of tufts               | 1580 / dm² 132104 / yd²  | ISO 1763     |
| Stroll test                   | ≤ 2.0 kV   | ISO 6356     |
| Vertical resistance           | ≤ 1 x 10⁹ Ohm  | ISO 10965    |
| Use classification            | 33 Commercial - heavy use  | EN 1307      |
| Dimensional stability         | ≤ 0.2 %  | EN 986       |
| Impact sound reduction ΔLw    | 23 dB  | ISO 10140    |
| Noise reduction               | 0.15 qw  | ISO 354      |
| Flammability                  | Bfl - s1 (loose laid tested)   | EN 13501-1   |
| Light Reflectance Value (LRV) | See right side page per colour   | BS 8493      |
| Colour Depth (L)              | See right side page per colour   | CIELAB       |


\* DESSO EcoBase® is a polyolefin based backing. Positively defined means: all ingredients have been assessed as either Green (optimal) or Yellow (tolerable) according to the Cradle to Cradle® assessment criteria. As described in Cradle to Cradle® Certified CM Product Standard Version 3.0. The total % of recycled content varies per product and per colour which can be found on our website: [www.tarkett.com](http://www.tarkett.com)

\*\* ECONYL® is a yarn made from 100% regenerated content. The total % of regenerated content varies per product and per colour. Whether a colour contains ECONYL® and the exact % thereof can be found on our website: [www.tarkett.com](http://www.tarkett.com)


With EcoBase™  
backing

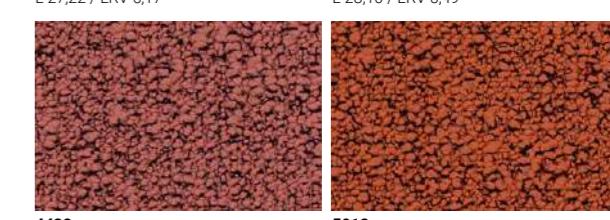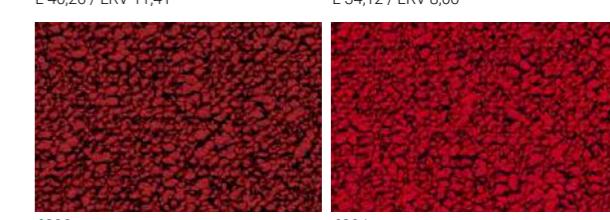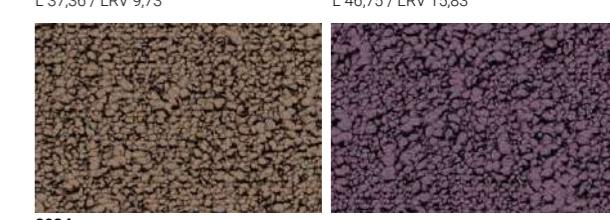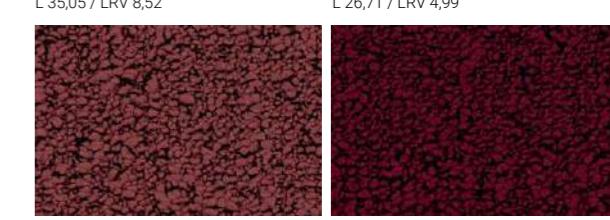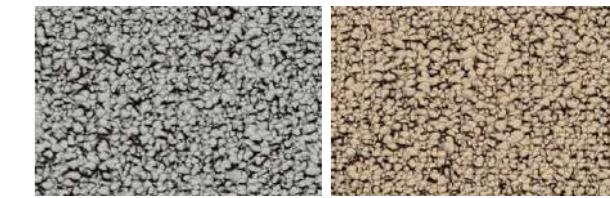

# Fields

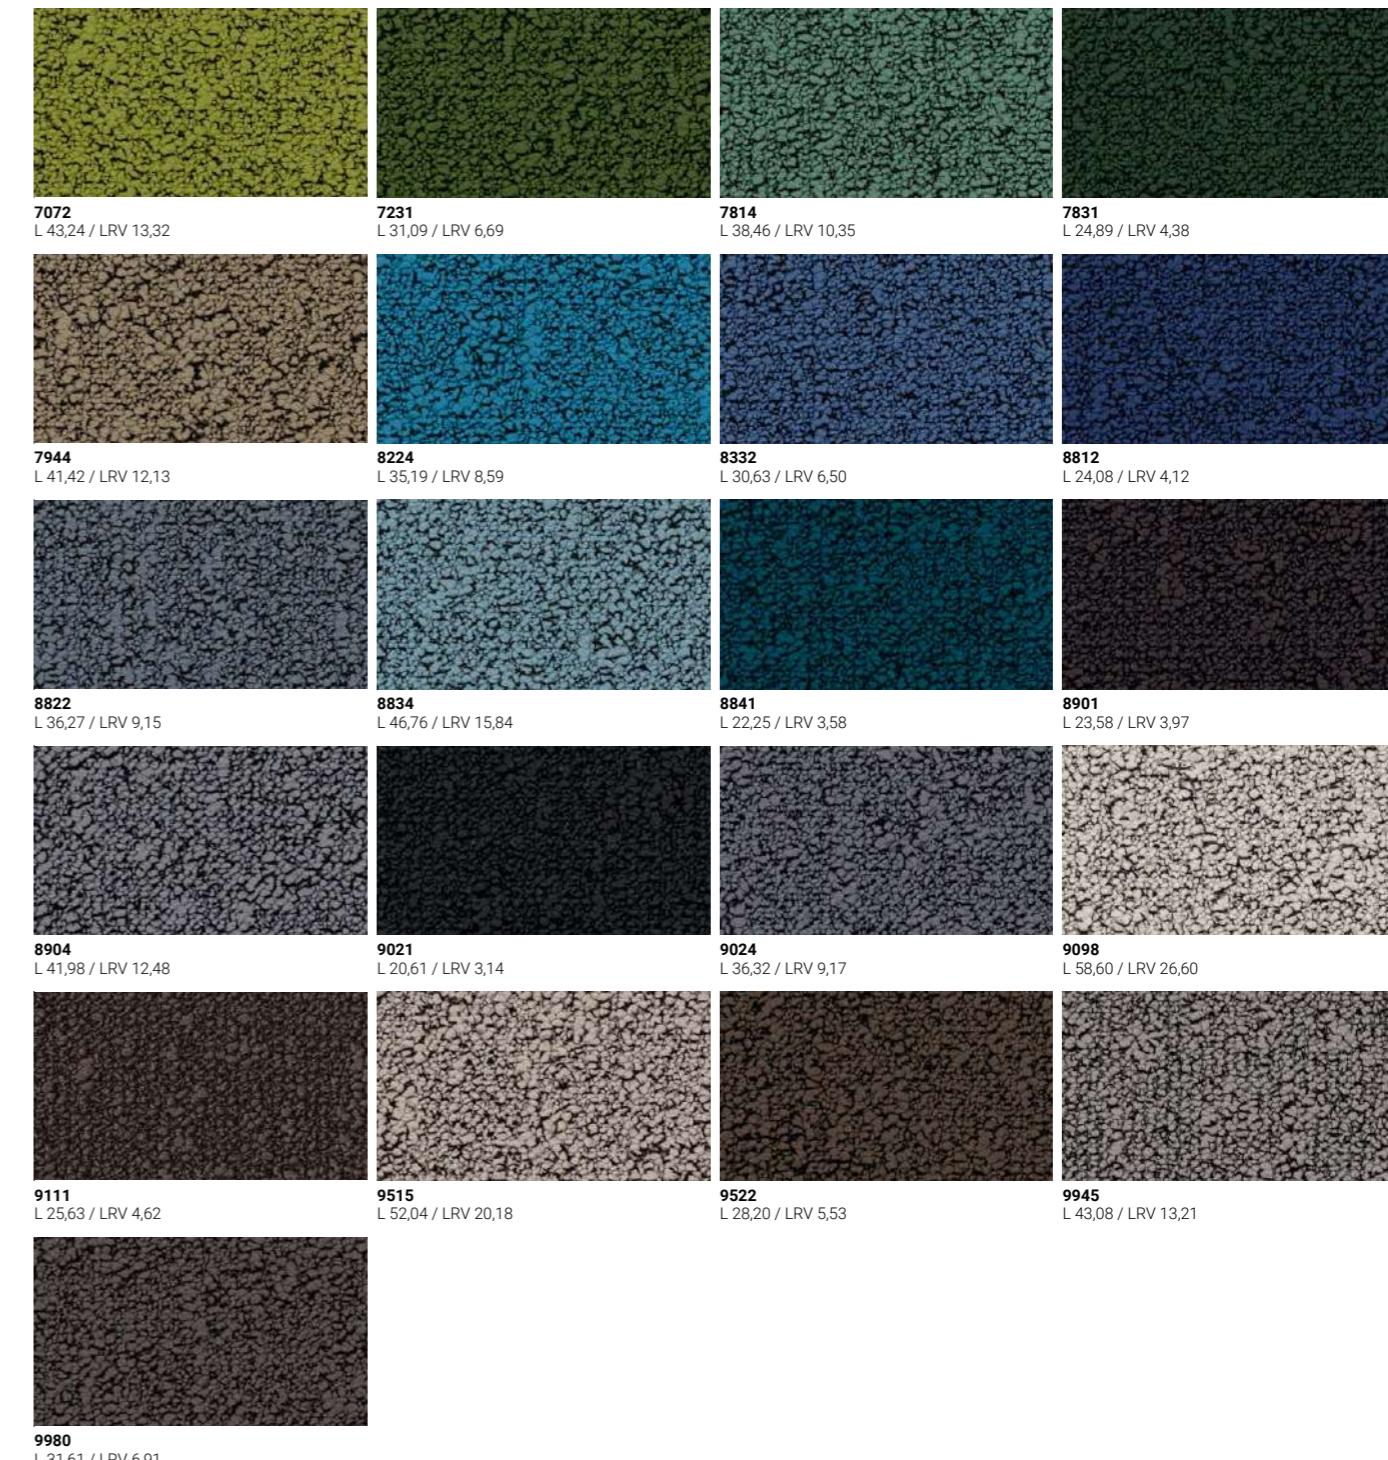


# Fields



A





#### Specification according to EN 1307

|  |   |                           |
|--|---|---------------------------|
| Type of manufacture                    | Needled   | ISO 2424                  |
| Aspect                                 | Flat needle felt                                      | ISO 2424                  |
| Dye method                             | Fibre dyed  |                           |
| Dimension                              | 50 cm x 50 cm / 19.68" x 19.68"<br>(20 tiles per box) | EN ISO 24342              |
| Primary backing                        | Polyester fleece                                      | ISO 2424                  |
| Secondary backing                      | ProBase - modified bitumen                            | ISO 2424                  |
| Pile fibre composition                 | 70% polyamide - 30% polyester                         | ISO 2424                  |
| Total thickness                        | 7.0 mm  | 0.3 inch                  |
| Effective pile thickness               | 2.2 mm  | 0.09 inch                 |
| Total mass                             | 4600 g/m <sup>2</sup>                                 | 135.8 oz/yd <sup>2</sup>  |
| Total pile mass                        | 525 g/m <sup>2</sup>                                  | 15.5 oz/yd <sup>2</sup>   |
| Effective pile mass                    | 470 g/m <sup>2</sup>                                  | 13.9 oz/yd <sup>2</sup>   |
| Pile density                           | 0.214 g/cm <sup>3</sup>                               | 0.0077 lb/in <sup>3</sup> |
| Number of tufts                        | - /dm <sup>2</sup>                                    | - /yd <sup>2</sup>        |
| Stroll test                            | ≤ 2.0 kV  | ISO 6356                  |
| Vertical resistance                    | ≤ 1 × 10 <sup>9</sup> Ohm                             | ISO 10965                 |
| Use classification                     | 33 Commercial - heavy use                             | EN 1307                   |
| Dimensional stability                  | ≤ 0.2 %   | EN 986                    |
| Impact sound reduction ΔL <sub>w</sub> | 19 dB   | ISO 10140                 |
| Noise reduction                        | 0.15 a <sub>w</sub>                                   | ISO 354                   |
| Flammability                           | B <sub>fl</sub> - s1 (loose laid tested)              | EN 13501-1                |
| Light Reflectance Value (LRV)          | See right side page per colour                        | BS 8493                   |
| Colour Depth (L)                       | See right side page per colour                        | CIELAB                    |



2913  
L 37,74 / LRV 9,94



8801  
L 22,65 / LRV 3,70



9501  
L 19,73 / LRV 2,92



9503  
L 33,83 / LRV 7,93




9506  
L 24,77 / LRV 4,34




9990  
L 25,71 / LRV 4,65



Quality- and Environmental  
Management System Certification  
ISO 9001 & ISO 14001

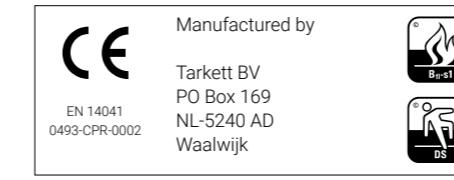

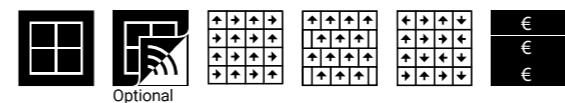


## Specification according to EN 1307

|                               |  |               |
|-------------------------------|--|---------------|
| Type of manufacture           | Tufted 1/10 "  | ISO 2424      |
| Aspect                        | Structured loop pile   | ISO 2424      |
| Dye method                    | Solution dyed  |               |
| Dimension                     | 50 cm x 50 cm / 19.68" x 19.68"<br>(20 tiles per box)                          | EN ISO 24342  |
| Primary backing               | Polyester fleece   | ISO 2424      |
| Secondary backing             | DESSO EcoBase® * - Contains on average 80% positively defined recycled content | ISO 2424      |
| Pile fibre composition        | BCF Polyamide 6 ECONYL®<br>(ECONYL® is made from 100% regenerated content) **  | ISO 2424      |
| Total thickness               | 6.5 mm   | 0.3 inch      |
| Effective pile thickness      | 2.8 mm   | 0.11 inch     |
| Total mass                    | 4250 g/m²  | 125.4 oz/yd²  |
| Total pile mass               | 730 g/m²   | 21.5 oz/yd²   |
| Effective pile mass           | 415 g/m²   | 12.2 oz/yd²   |
| Pile density                  | 0.148 g/cm³  | 0.0054 lb/in³ |
| Number of tufts               | 1580 /dm²  | 132104 /yd²   |
| Stroll test                   | ≤ 2.0 kV   | ISO 6356      |
| Vertical resistance           | ≤ 1 x 10⁹ Ohm  | ISO 10965     |
| Use classification            | 33 Commercial - heavy use  | EN 1307       |
| Dimensional stability         | ≤ 0.2 %  | EN 986        |
| Impact sound reduction ΔLw    | 23 dB  | ISO 10140     |
| Noise reduction               | 0.15 αw  | ISO 354       |
| Flammability                  | Bfl - s1 (loose laid tested)   | EN 13501-1    |
| Light Reflectance Value (LRV) | See right side page per colour   | BS 8493       |
| Colour Depth (L)              | See right side page per colour   | CIELAB        |

\* DESSO EcoBase® is a polyolefin based backing. Positively defined means: all ingredients have been assessed as either Green (optimal) or Yellow (tolerable) according to the Cradle to Cradle® assessment criteria. As described in Cradle to Cradle® Certified CM Product Standard Version 3.0. The total % of recycled content varies per product and per colour which can be found on our website: [www.tarkett.com](http://www.tarkett.com)

\*\* ECONYL® is a yarn made from 100% regenerated content. The total % of regenerated content varies per product and per colour. Whether a colour contains ECONYL® and the exact % thereof can be found on our website: [www.tarkett.com](http://www.tarkett.com)

With EcoBase™  
backing



Manufactured by  
Tarkett BV  
PO Box 169  
NL-5240 AD  
Waalwijk




5433  
L 49,96 / LRV 18,38



1915  
L 47,35 / LRV 16,29



2045  
L 44,49 / LRV 14,18

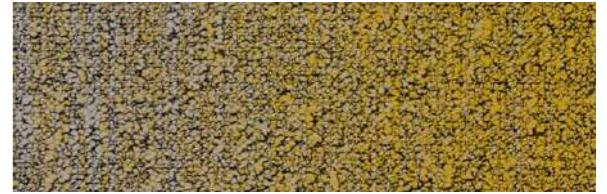

2104  
L 40,84 / LRV 11,76




2956  
L 36,25 / LRV 9,14



5131  
L 38,80 / LRV 10,54



9920  
L 50,72 / LRV 19,03

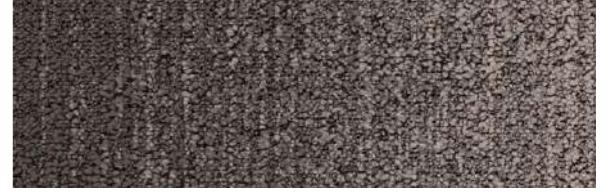



9965  
L 43,10 / LRV 13,23


3D TEXTURES





Fuse Landscape 7073, 7833, 7843, 7854 / Fields 7072, 7231, 7814, 7831, 9515

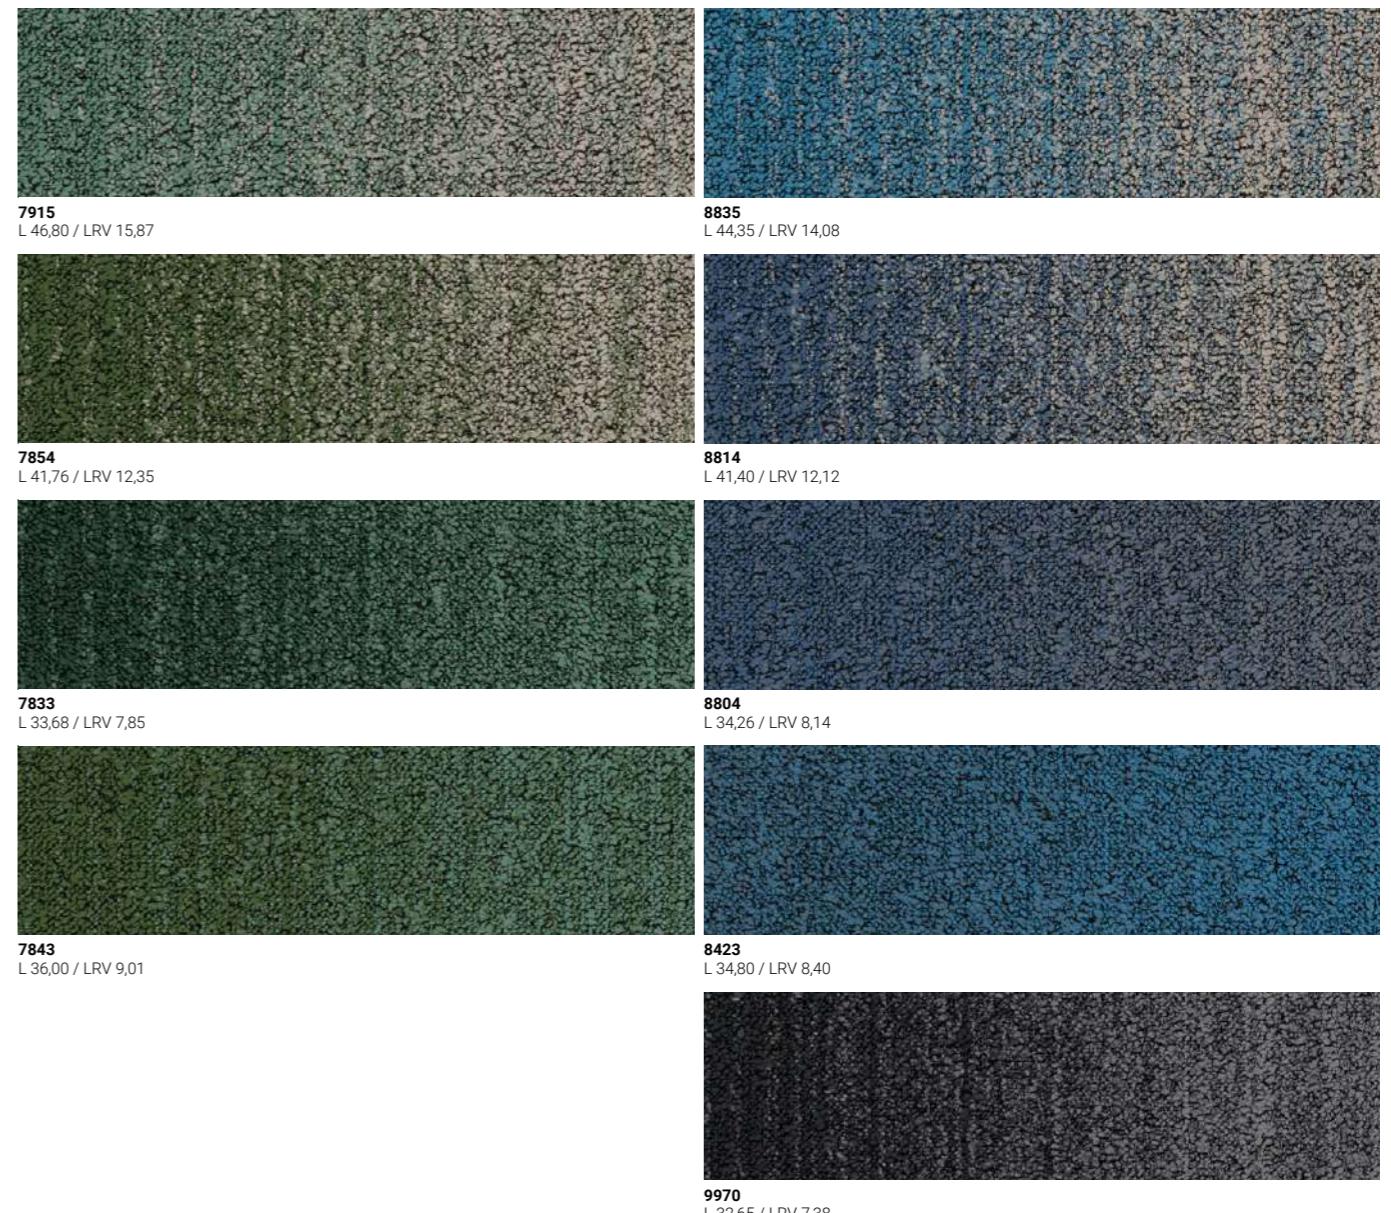

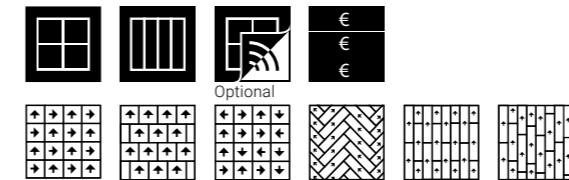


## Specification according to EN 1307

|                               |  |              |
|-------------------------------|--|--------------|
| Type of manufacture           | Tufted 1/10 "  | ISO 2424     |
| Aspect                        | Structured loop pile   | ISO 2424     |
| Dye method                    | Solution dyed  |              |
| Dimension                     | 50 cm x 50 cm & 100 cm x 25 cm / 19.68" x 19.68" & 39.36" x 9.84" (20 tiles per box) | EN ISO 24342 |
| Primary backing               | Polyester fleece   | ISO 2424     |
| Secondary backing             | DESSO EcoBase® * - Contains on average 80% positively defined recycled content       | ISO 2424     |
| Pile fibre composition        | BCF Polyamide 6 ECONYL® (ECONYL® is made from 100% regenerated content) **           | ISO 2424     |
| Total thickness               | 6.5 mm 0.3 inch  | ISO 1765     |
| Effective pile thickness      | 2.8 mm 0.11 inch   | ISO 1766     |
| Total mass                    | 4250 g/m² 125.4 oz/yd²   | ISO 8543     |
| Total pile mass               | 730 g/m² 21.5 oz/yd²   | ISO 2424     |
| Effective pile mass           | 415 g/m² 12.2 oz/yd²   | ISO 8543     |
| Pile density                  | 0.148 g/cm³ 0.0054 lb/in³  | ISO 8543     |
| Number of tufts               | 1580 /dm² 132104 /yd²  | ISO 1763     |
| Stroll test                   | ≤ 2.0 kV   | ISO 6356     |
| Vertical resistance           | ≤ 1 x 10⁹ Ohm  | ISO 10965    |
| Use classification            | 33 Commercial - heavy use  | EN 1307      |
| Dimensional stability         | ≤ 0.2 %  | EN 986       |
| Impact sound reduction ΔLw    | 23 dB  | ISO 10140    |
| Noise reduction               | 0.15 aₜ  | ISO 354      |
| Flammability                  | B₂ - s1 (loose laid tested)  | EN 13501-1   |
| Light Reflectance Value (LRV) | See right side page per colour   | BS 8493      |
| Colour Depth (L)              | See right side page per colour   | CIELAB       |

\* DESSO EcoBase® is a polyolefin based backing. Positively defined means: all ingredients have been assessed as either Green (optimal) or Yellow (tolerable) according to the Cradle to Cradle® assessment criteria. As described in Cradle to Cradle® Certified CM Product Standard Version 3.0. The total % of recycled content varies per product and per colour which can be found on our website: [www.tarkett.com](http://www.tarkett.com)

\*\* ECONYL® is a yarn made from 100% regenerated content. The total % of regenerated content varies per product and per colour. Whether a colour contains ECONYL® and the exact % thereof can be found on our website: [www.tarkett.com](http://www.tarkett.com)

With EcoBase™  
backing

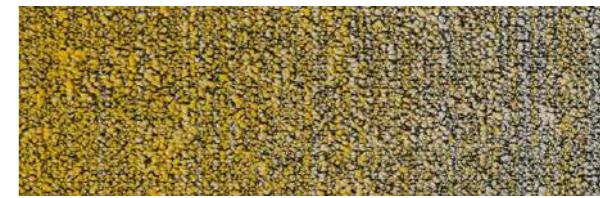

2014  
L 51,75 / LRV 19,92



2913  
L 48,77 / LRV 17,40




5102  
L 43,27 / LRV 13,34




7073  
L 47,69 / LRV 16,55




8823  
L 43,38 / LRV 13,42

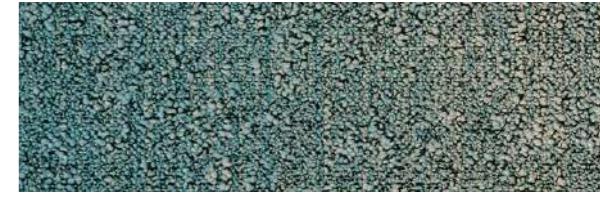


8836  
L 48,92 / LRV 17,53

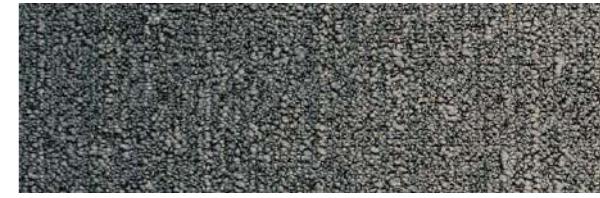

8905  
L 47,20 / LRV 16,17

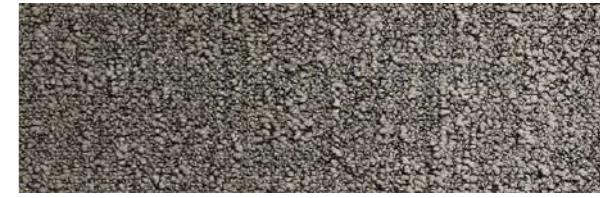

9096  
L 44,88 / LRV 14,46

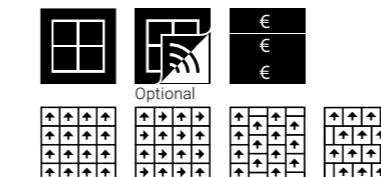


#### Specification according to EN 1307

|                               |  |               |
|-------------------------------|--|---------------|
| Type of manufacture           | Tufted 1/10 "  | ISO 2424      |
| Aspect                        | Structured loop pile   | ISO 2424      |
| Dye method                    | Solution dyed  |               |
| Dimension                     | 50 cm x 50 cm / 19.68" x 19.68"<br>(20 tiles per box)                          | EN ISO 24342  |
| Primary backing               | Polyester fleece   | ISO 2424      |
| Secondary backing             | DESSO EcoBase® * - Contains on average 80% positively defined recycled content | ISO 2424      |
| Pile fibre composition        | BCF Polyamide 6 ECONYL®<br>(ECONYL® is made from 100% regenerated content) **  | ISO 2424      |
| Total thickness               | 7.5 mm   | 0.3 inch      |
| Effective pile thickness      | 4.1 mm   | 0.16 inch     |
| Total mass                    | 4350 g/m²  | 128.4 oz/yd²  |
| Total pile mass               | 860 g/m²   | 25.4 oz/yd²   |
| Effective pile mass           | 545 g/m²   | 16.1 oz/yd²   |
| Pile density                  | 0.133 g/cm³  | 0.0048 lb/in³ |
| Number of tufts               | 1580 /dm²  | 132104 /yd²   |
| Stroll test                   | ≤ 2.0 kV   | ISO 6356      |
| Vertical resistance           | ≤ 1 x 10⁹ Ohm  | ISO 10965     |
| Use classification            | 33 Commercial - heavy use  | EN 1307       |
| Dimensional stability         | ≤ 0.2 %  | EN 986        |
| Impact sound reduction ΔLw    | 26 dB  | ISO 10140     |
| Noise reduction               | 0.20 αw  | ISO 354       |
| Flammability                  | Bfl - s1 (loose laid tested)   | EN 13501-1    |
| Light Reflectance Value (LRV) | See right side page per colour   | BS 8493       |
| Colour Depth (L)              | See right side page per colour   | CIELAB        |

\* DESSO EcoBase® is a polyolefin based backing. Positively defined means: all ingredients have been assessed as either Green (optimal) or Yellow (tolerable) according to the Cradle to Cradle® assessment criteria. As described in Cradle to Cradle® Certified CM Product Standard Version 3.0. The total % of recycled content varies per product and per colour which can be found on our website: [www.tarkett.com](http://www.tarkett.com)

\*\* ECONYL® is a yarn made from 100% regenerated content. The total % of regenerated content varies per product and per colour. Whether a colour contains ECONYL® and the exact % thereof can be found on our website: [www.tarkett.com](http://www.tarkett.com)

With EcoBase™  
backing

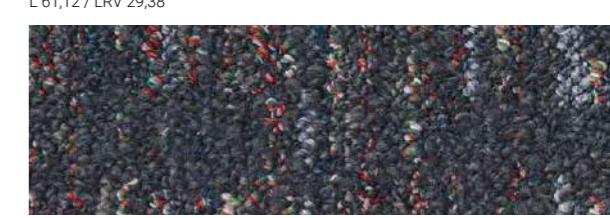

**3D TEXTURES**





#### Specification according to EN 1307

|  |   |                           |
|--|---|---------------------------|
| Type of manufacture                    | Tufted 1/10 "   | ISO 2424                  |
| Aspect                                 | Loop pile   | ISO 2424                  |
| Dye method                             | Solution dyed   |                           |
| Dimension                              | 50 cm x 50 cm / 19.68" x 19.68"<br>(20 tiles per box) | EN ISO 24342              |
| Primary backing                        | Polyester fleece                                      | ISO 2424                  |
| Secondary backing                      | ProBase - modified bitumen                            | ISO 2424                  |
| Pile fibre composition                 | BCF Polyamide 6                                       | ISO 2424                  |
| Total thickness                        | 6.5 mm  | 0.3 inch                  |
| Effective pile thickness               | 3.4 mm  | 0.13 inch                 |
| Total mass                             | 4050 g/m <sup>2</sup>                                 | 119.5 oz/yd <sup>2</sup>  |
| Total pile mass                        | 620 g/m <sup>2</sup>                                  | 18.3 oz/yd <sup>2</sup>   |
| Effective pile mass                    | 410 g/m <sup>2</sup>                                  | 12.1 oz/yd <sup>2</sup>   |
| Pile density                           | 0.121 g/cm <sup>3</sup>                               | 0.0044 lb/in <sup>3</sup> |
| Number of tufts                        | 1580 /dm <sup>2</sup>                                 | 132104 /yd <sup>2</sup>   |
| Stroll test                            | ≤ 2.0 kV  | ISO 6356                  |
| Vertical resistance                    | ≤ 1 x 10 <sup>9</sup> Ohm                             | ISO 10965                 |
| Use classification                     | 33 Commercial - heavy use                             | EN 1307                   |
| Dimensional stability                  | ≤ 0.2 %   | EN 986                    |
| Impact sound reduction ΔL <sub>w</sub> | 27 dB   | ISO 10140                 |
| Noise reduction                        | 0.20 α <sub>w</sub>                                   | ISO 354                   |
| Flammability                           | B <sub>fl</sub> - s1 (loose laid tested)              | EN 13501-1                |
| Light Reflectance Value (LRV)          | See right side page per colour                        | BS 8493                   |
| Colour Depth (L)                       | See right side page per colour                        | CIELAB                    |

With ProBase™  
backing      With EcoBase™  
backing



1908  
L 49,83 / LRV 18,27

4211  
L 29,14 / LRV 5,89



6116  
L 60,94 / LRV 29,18

7272  
L 39,69 / LRV 11,06




8331  
L 24,14 / LRV 4,14

8833  
L 40,24 / LRV 11,39




9093  
L 36,64 / LRV 9,34

9094  
L 41,99 / LRV 12,49

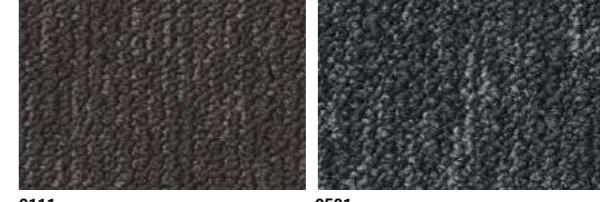


9111  
L 27,88 / LRV 5,41

9501  
L 31,58 / LRV 6,90

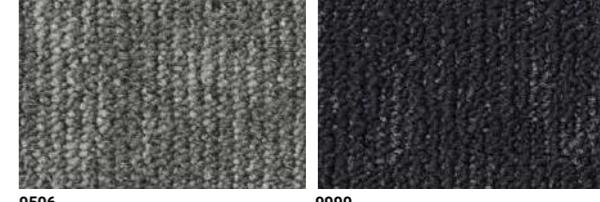

9506  
L 42,94 / LRV 13,12

9990  
L 20,73 / LRV 3,18



#### Specification according to EN 1307

|                               |  |               |
|-------------------------------|--|---------------|
| Type of manufacture           | Tufted 1/10 "  | ISO 2424      |
| Aspect                        | Structured loop pile   | ISO 2424      |
| Dye method                    | Solution dyed  |               |
| Dimension                     | 50 cm x 50 cm / 19.68" x 19.68"<br>(20 tiles per box)                          | EN ISO 24342  |
| Primary backing               | Polyester fleece   | ISO 2424      |
| Secondary backing             | DESSO EcoBase® * - Contains on average 80% positively defined recycled content | ISO 2424      |
| Pile fibre composition        | BCF Polyamide 6  | ISO 2424      |
| Total thickness               | 7.0 mm   | 0.3 inch      |
| Effective pile thickness      | 3.5 mm   | 0.14 inch     |
| Total mass                    | 4150 g/m²  | 122.5 oz/yd²  |
| Total pile mass               | 650 g/m²   | 19.2 oz/yd²   |
| Effective pile mass           | 395 g/m²   | 11.7 oz/yd²   |
| Pile density                  | 0.113 g/cm³  | 0.0041 lb/in³ |
| Number of tufts               | 1580 / dm²   | 132104 / yd²  |
| Stroll test                   | ≤ 2.0 kV   | ISO 6356      |
| Vertical resistance           | ≤ 1 x 10⁹ Ohm  | ISO 10965     |
| Use classification            | 33 Commercial - heavy use  | EN 1307       |
| Dimensional stability         | ≤ 0.2 %  | EN 986        |
| Impact sound reduction ΔLw    | 25 dB  | ISO 10140     |
| Noise reduction               | 0.20 αw  | ISO 354       |
| Flammability                  | Bfl - s1 (loose laid tested)   | EN 13501-1    |
| Light Reflectance Value (LRV) | See right side page per colour   | BS 8493       |
| Colour Depth (L)              | See right side page per colour   | CIELAB        |

\* DESSO EcoBase® is a polyolefin based backing. Positively defined means: all ingredients have been assessed as either Green (optimal) or Yellow (tolerable) according to the Cradle to Cradle® assessment criteria. As described in Cradle to Cradle® Certified CM Product Standard Version 3.0. The total % of recycled content varies per product and per colour which can be found on our website: [www.tarkett.com](http://www.tarkett.com)

With EcoBase™  
backing



2067 L 39,11 / LRV 10,72 7844 L 50,76 / LRV 18,99




7923 L 44,82 / LRV 14,41 8904 L 48,40 / LRV 17,11



8913 L 42,70 / LRV 12,96 8927 L 52,36 / LRV 20,46



9024 L 34,70 / LRV 8,35 9027 L 58,17 / LRV 26,14

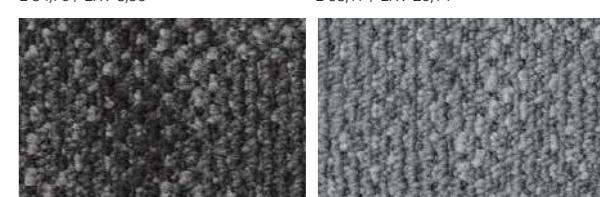


9033 L 32,73 / LRV 7,41 9035 L 50,21 / LRV 18,59



9106 L 52,05 / LRV 20,19 9930 L 63,63 / LRV 32,35

#### 3D TEXTURES




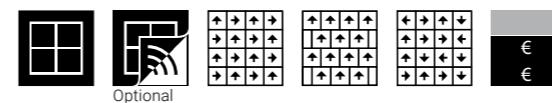


#### Specification according to EN 1307

|                               |  |               |
|-------------------------------|--|---------------|
| Type of manufacture           | Tufted 1/10 "  | ISO 2424      |
| Aspect                        | Structured loop pile   | ISO 2424      |
| Dye method                    | Solution dyed  |               |
| Dimension                     | 50 cm x 50 cm / 19.68" x 19.68"<br>(20 tiles per box)                          | EN ISO 24342  |
| Primary backing               | Polyester fleece   | ISO 2424      |
| Secondary backing             | DESSO EcoBase® * - Contains on average 80% positively defined recycled content | ISO 2424      |
| Pile fibre composition        | BCF Polyamide 6  | ISO 2424      |
| Total thickness               | 7.0 mm   | 0.3 inch      |
| Effective pile thickness      | 3.5 mm   | 0.14 inch     |
| Total mass                    | 4150 g/m²  | 122.5 oz/yd²  |
| Total pile mass               | 650 g/m²   | 19.2 oz/yd²   |
| Effective pile mass           | 395 g/m²   | 11.7 oz/yd²   |
| Pile density                  | 0.113 g/cm³  | 0.0041 lb/in³ |
| Number of tufts               | 1580 /dm²  | 132104 /yd²   |
| Stroll test                   | ≤ 2.0 kV   | ISO 6356      |
| Vertical resistance           | ≤ 1 × 10⁹ Ohm  | ISO 10965     |
| Use classification            | 33 Commercial - heavy use  | EN 1307       |
| Dimensional stability         | ≤ 0.2 %  | EN 986        |
| Impact sound reduction ΔLw    | 25 dB  | ISO 10140     |
| Noise reduction               | 0.20 αw  | ISO 354       |
| Flammability                  | Bfl - s1 (loose laid tested)   | EN 13501-1    |
| Light Reflectance Value (LRV) | See right side page per colour   | BS 8493       |
| Colour Depth (L)              | See right side page per colour   | CIELAB        |


\* DESSO EcoBase® is a polyolefin based backing. Positively defined means: all ingredients have been assessed as either Green (optimal) or Yellow (tolerable) according to the Cradle to Cradle® assessment criteria. As described in Cradle to Cradle® Certified CM Product Standard Version 3.0. The total % of recycled content varies per product and per colour which can be found on our website: [www.tarkett.com](http://www.tarkett.com)

With EcoBase™  
backing

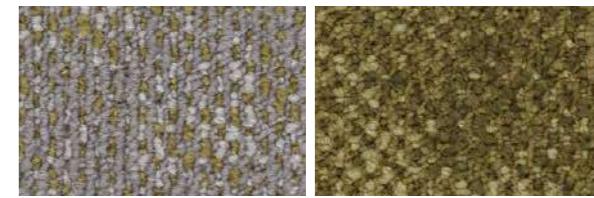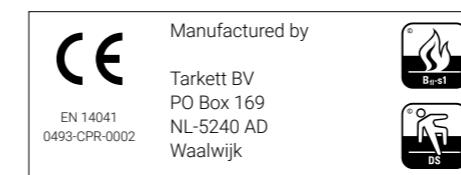

Bloom 2003  
L 50,27 / LRV 18,65

Vivid 2007  
L 42,81 / LRV 13,03

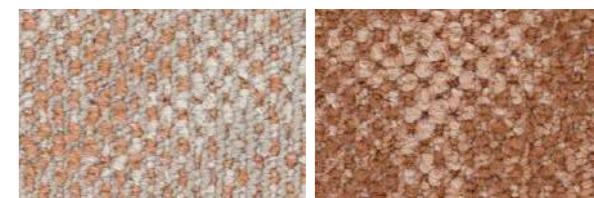

Bloom 2064  
L 60,42 / LRV 28,59

Vivid 2056  
L 49,27 / LRV 17,81




Bloom 2942  
L 37,18 / LRV 9,64

Vivid 2091  
L 31,95 / LRV 7,06



Bloom 6122  
L 57,59 / LRV 25,53

Vivid 6202  
L 55,95 / LRV 26,68

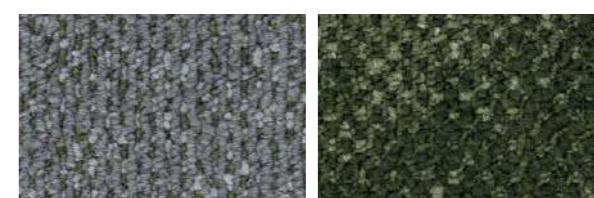

Bloom 7924  
L 45,69 / LRV 15,04

Vivid 7932  
L 33,54 / LRV 7,79



Bloom 8922  
L 35,77 / LRV 8,89

Vivid 8842  
L 36,81 / LRV 9,43



Bloom 9004  
L 52,23 / LRV 20,35

Vivid 3913  
L 43,33 / LRV 13,38




Bloom 9096  
L 59,20 / LRV 27,24

Vivid 9523  
L 46,63 / LRV 15,74



iconic

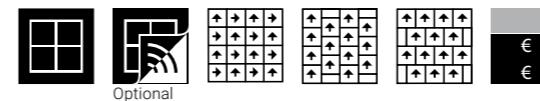



#### Specification according to EN 1307

|                               |   |               |
|-------------------------------|---|---------------|
| Type of manufacture           | Tufted 1/10 "   | ISO 2424      |
| Aspect                        | Loop pile   | ISO 2424      |
| Dye method                    | Solution dyed   |               |
| Dimension                     | 50 cm x 50 cm / 19.68" x 19.68"<br>(20 tiles per box)                             | EN ISO 24342  |
| Primary backing               | Polyester fleece  | ISO 2424      |
| Secondary backing             | DESSO EcoBase® * - Contains on average 80% positively defined recycled content    | ISO 2424      |
| Pile fibre composition        | BCF Polyamide 6 and ECONYL®<br>(ECONYL® is made from 100% regenerated content) ** | ISO 2424      |
| Total thickness               | 7.0 mm  | 0.3 inch      |
| Effective pile thickness      | 3.5 mm  | 0.14 inch     |
| Total mass                    | 4100 g/m²   | 121.0 oz/yd²  |
| Total pile mass               | 655 g/m²  | 19.3 oz/yd²   |
| Effective pile mass           | 420 g/m²  | 12.4 oz/yd²   |
| Pile density                  | 0.120 g/cm³   | 0.0043 lb/in³ |
| Number of tufts               | 1580 /dm²   | 132104 /yd²   |
| Stroll test                   | ≤ 2.0 kV  | ISO 6356      |
| Vertical resistance           | ≤ 1 x 10⁹ Ohm   | ISO 10965     |
| Use classification            | 33 Commercial - heavy use   | EN 1307       |
| Dimensional stability         | ≤ 0.2 %   | EN 986        |
| Impact sound reduction ΔLw    | 24 dB   | ISO 10140     |
| Noise reduction               | 0.15 aₜ   | ISO 354       |
| Flammability                  | Bfl - s1 (loose laid tested)  | EN 13501-1    |
| Light Reflectance Value (LRV) | See right side page per colour  | BS 8493       |
| Colour Depth (L)              | See right side page per colour  | CIELAB        |


\* DESSO EcoBase® is a polyolefin based backing. Positively defined means: all ingredients have been assessed as either Green (optimal) or Yellow (tolerable) according to the Cradle to Cradle® assessment criteria. As described in Cradle to Cradle® Certified CM Product Standard Version 3.0. The total % of recycled content varies per product and per colour which can be found on our website: [www.tarkett.com](http://www.tarkett.com)

\*\* ECONYL® is a yarn made from 100% regenerated content. The total % of regenerated content varies per product and per colour. Whether a colour contains ECONYL® and the exact % thereof can be found on our website: [www.tarkett.com](http://www.tarkett.com)


With EcoBase™  
backing

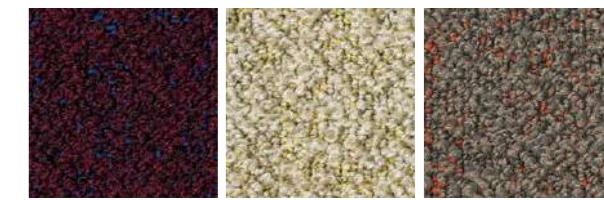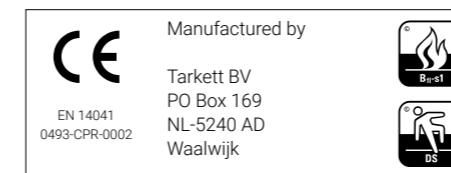


2101 L 19,27 / LRV 2,81  
2906 L 63,19 / LRV 31,81  
2913 L 39,46 / LRV 10,93

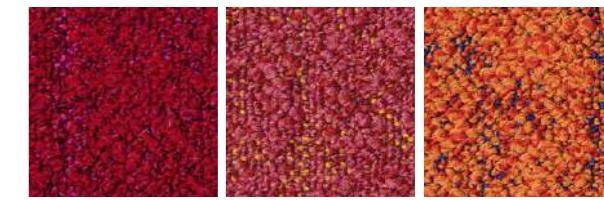


4208 L 28,36 / LRV 5,59  
4212 L 38,55 / LRV 10,40  
5103 L 43,98 / LRV 13,82

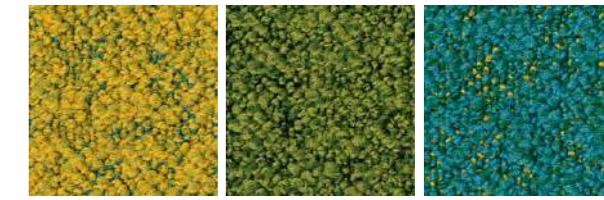


6401 L 56,08 / LRV 23,99  
7164 L 43,68 / LRV 13,62  
8107 L 40,88 / LRV 11,79

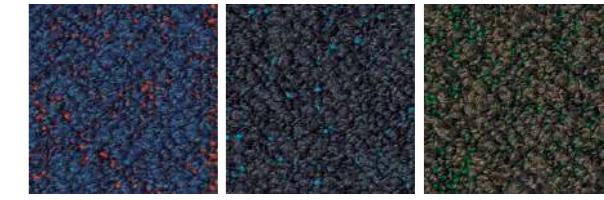

8802 L 24,46 / LRV 4,24  
8911 L 26,01 / LRV 4,75  
9093 L 27,86 / LRV 5,40

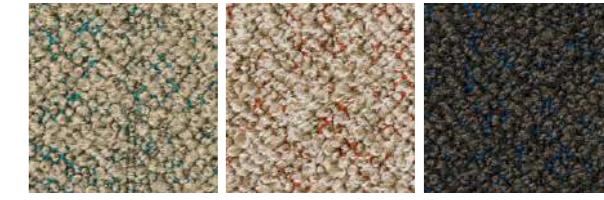


9096 L 55,36 / LRV 23,28  
9097 L 60,60 / LRV 28,79  
9512 L 27,99 / LRV 5,45

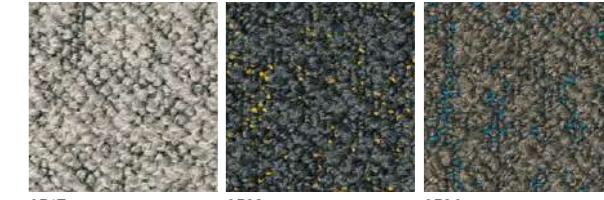

9517 L 60,51 / LRV 28,70  
9523 L 34,56 / LRV 8,28  
9524 L 39,04 / LRV 10,68




9525 L 52,71 / LRV 20,78  
9527 L 67,16 / LRV 13,84  
9945 L 43,02 / LRV 13,17

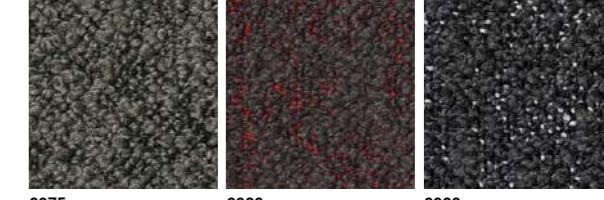

9975 L 35,18 / LRV 8,59  
9980 L 24,04 / LRV 4,11  
9990 L 26,04 / LRV 4,76

iconic

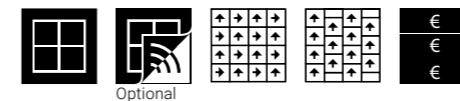

## Specification according to EN 1307

|                               |  |               |
|-------------------------------|--|---------------|
| Type of manufacture           | Tufted 1/10 "  | ISO 2424      |
| Aspect                        | Structured loop pile   | ISO 2424      |
| Dye method                    | Space dyed + solution dyed   |               |
| Dimension                     | 50 cm x 50 cm / 19.68" x 19.68"<br>(20 tiles per box)                          | EN ISO 24342  |
| Primary backing               | Polyester fleece   | ISO 2424      |
| Secondary backing             | DESSO EcoBase® * - Contains on average 80% positively defined recycled content | ISO 2424      |
| Pile fibre composition        | BCF Polyamide 6 ECONYL®<br>(ECONYL® is made from 100% regenerated content) **  | ISO 2424      |
| Total thickness               | 6.0 mm   | 0.2 inch      |
| Effective pile thickness      | 2.7 mm   | 0.11 inch     |
| Total mass                    | 4200 g/m²  | 124.0 oz/yd²  |
| Total pile mass               | 670 g/m²   | 19.8 oz/yd²   |
| Effective pile mass           | 430 g/m²   | 12.7 oz/yd²   |
| Pile density                  | 0.159 g/cm³  | 0.0057 lb/in³ |
| Number of tufts               | 1580 /dm²  | 132104 /yd²   |
| Stroll test                   | ≤ 2.0 kV   | ISO 6356      |
| Vertical resistance           | ≤ 1 x 10⁹ Ohm  | ISO 10965     |
| Use classification            | 33 Commercial - heavy use  | EN 1307       |
| Dimensional stability         | ≤ 0.2 %  | EN 986        |
| Impact sound reduction ΔLw    | 21 dB  | ISO 10140     |
| Noise reduction               | 0.15 a_w   | ISO 354       |
| Flammability                  | Bfl - s1 (loose laid tested)   | EN 13501-1    |
| Light Reflectance Value (LRV) | See right side page per colour   | BS 8493       |
| Colour Depth (L)              | See right side page per colour   | CIELAB        |

\* DESSO EcoBase® is a polyolefin based backing. Positively defined means: all ingredients have been assessed as either Green (optimal) or Yellow (tolerable) according to the Cradle to Cradle® assessment criteria. As described in Cradle to Cradle® Certified CM Product Standard Version 3.0. The total % of recycled content varies per product and per colour which can be found on our website: [www.tarkett.com](http://www.tarkett.com)

\*\* ECONYL® is a yarn made from 100% regenerated content. The total % of regenerated content varies per product and per colour. Whether a colour contains ECONYL® and the exact % thereof can be found on our website: [www.tarkett.com](http://www.tarkett.com)

With EcoBase™  
backing

8902  
L 25,59 / LRV 4,61




8904  
L 48,37 / LRV 17,09



9021  
L 24,03 / LRV 4,11



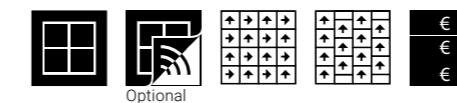

#### Preliminary specification according to EN 1307

|                               |  |               |
|-------------------------------|--|---------------|
| Type of manufacture           | Tufted 1/10 "  | ISO 2424      |
| Aspect                        | Structured loop pile   | ISO 2424      |
| Dye method                    | Space dyed + solution dyed   |               |
| Dimension                     | 50 cm x 50 cm / 19.68" x 19.68"<br>(20 tiles per box)                          | EN ISO 24342  |
| Primary backing               | Polyester fleece   | ISO 2424      |
| Secondary backing             | DESSO EcoBase® * - Contains on average 80% positively defined recycled content | ISO 2424      |
| Pile fibre composition        | BCF Polyamide 6 ECONYL®<br>(ECONYL® is made from 100% regenerated content) **  | ISO 2424      |
| Total thickness               | 7.0 mm   | 0.3 inch      |
| Effective pile thickness      | 3.3 mm   | 0.13 inch     |
| Total mass                    | 4300 g/m²  | 126.9 oz/yd²  |
| Total pile mass               | 780 g/m²   | 23.0 oz/yd²   |
| Effective pile mass           | 505 g/m²   | 14.9 oz/yd²   |
| Pile density                  | 0.153 g/cm³  | 0.0055 lb/in³ |
| Number of tufts               | 1580 /dm²  | 132104 /yd²   |
| Stroll test                   | ≤ 2.0 kV   | ISO 6356      |
| Vertical resistance           | ≤ 1 x 10⁹ Ohm  | ISO 10965     |
| Use classification            | 33 Commercial - heavy use  | EN 1307       |
| Dimensional stability         | ≤ 0.2 %  | EN 986        |
| Impact sound reduction ΔLw    | 24 dB  | ISO 10140     |
| Noise reduction               | 0.15 a_w   | ISO 354       |
| Flammability                  | Bfl - s1 (loose laid tested)   | EN 13501-1    |
| Light Reflectance Value (LRV) | See right side page per colour   | BS 8493       |
| Colour Depth (L)              | See right side page per colour   | CIELAB        |

\* DESSO EcoBase® is a polyolefin based backing. Positively defined means: all ingredients have been assessed as either Green (optimal) or Yellow (tolerable) according to the Cradle to Cradle® assessment criteria. As described in Cradle to Cradle® Certified CM Product Standard Version 3.0. The total % of recycled content varies per product and per colour which can be found on our website: [www.tarkett.com](http://www.tarkett.com)


\*\* ECONYL® is a yarn made from 100% regenerated content. The total % of regenerated content varies per product and per colour. Whether a colour contains ECONYL® and the exact % thereof can be found on our website: [www.tarkett.com](http://www.tarkett.com)



8905  
L 53,44 / LRV 21,52

With EcoBase™  
backing





#### Specification according to EN 1307

|                               |  |               |
|-------------------------------|--|---------------|
| Type of manufacture           | Tufted 1/10 "  | ISO 2424      |
| Aspect                        | Structured loop pile   | ISO 2424      |
| Dye method                    | Space dyed + solution dyed   |               |
| Dimension                     | 50 cm x 50 cm / 19.68" x 19.68"<br>(20 tiles per box)                          | EN ISO 24342  |
| Primary backing               | Polyester fleece   | ISO 2424      |
| Secondary backing             | DESSO EcoBase® * - Contains on average 80% positively defined recycled content | ISO 2424      |
| Pile fibre composition        | BCF Polyamide 6 ECONYL®<br>(ECONYL® is made from 100% regenerated content) **  | ISO 2424      |
| Total thickness               | 7.0 mm   | 0.3 inch      |
| Effective pile thickness      | 3.3 mm   | 0.13 inch     |
| Total mass                    | 4300 g/m²  | 126.9 oz/yd²  |
| Total pile mass               | 745 g/m²   | 22.0 oz/yd²   |
| Effective pile mass           | 475 g/m²   | 14.0 oz/yd²   |
| Pile density                  | 0.144 g/cm³  | 0.0052 lb/in³ |
| Number of tufts               | 1580 /dm²  | 132104 /yd²   |
| Stroll test                   | ≤ 2.0 kV   | ISO 6356      |
| Vertical resistance           | ≤ 1 x 10⁹ Ohm  | ISO 10965     |
| Use classification            | 33 Commercial - heavy use  | EN 1307       |
| Dimensional stability         | ≤ 0.2 %  | EN 986        |
| Impact sound reduction ΔLw    | 23 dB  | ISO 10140     |
| Noise reduction               | 0.20 αw  | ISO 354       |
| Flammability                  | Bfl - s1 (loose laid tested)   | EN 13501-1    |
| Light Reflectance Value (LRV) | See right side page per colour   | BS 8493       |
| Colour Depth (L)              | See right side page per colour   | CIELAB        |

\* DESSO EcoBase® is a polyolefin based backing. Positively defined means: all ingredients have been assessed as either Green (optimal) or Yellow (tolerable) according to the Cradle to Cradle® assessment criteria. As described in Cradle to Cradle® Certified CM Product Standard Version 3.0. The total % of recycled content varies per product and per colour which can be found on our website: [www.tarkett.com](http://www.tarkett.com)

\*\* ECONYL® is a yarn made from 100% regenerated content. The total % of regenerated content varies per product and per colour. Whether a colour contains ECONYL® and the exact % thereof can be found on our website: [www.tarkett.com](http://www.tarkett.com)

With EcoBase™  
backing



8812  
L 29,90 / LRV 6,19



8903  
L 40,80 / LRV 11,74



#### Preliminary specification according to EN 1307

|                               |  |               |
|-------------------------------|--|---------------|
| Type of manufacture           | Tufted 1/10 "  | ISO 2424      |
| Aspect                        | Structured loop pile   | ISO 2424      |
| Dye method                    | Solution dyed  |               |
| Dimension                     | 50 cm x 50 cm / 19.68" x 19.68"<br>(20 tiles per box)                          | EN ISO 24342  |
| Primary backing               | Polyester fleece   | ISO 2424      |
| Secondary backing             | DESSO EcoBase® * - Contains on average 80% positively defined recycled content | ISO 2424      |
| Pile fibre composition        | BCF Polyamide 6 ECONYL®<br>(ECONYL® is made from 100% regenerated content) **  | ISO 2424      |
| Total thickness               | 6.0 mm   | 0.2 inch      |
| Effective pile thickness      | 2.8 mm   | 0.11 inch     |
| Total mass                    | 4100 g/m²  | 121.0 oz/yd²  |
| Total pile mass               | 610 g/m²   | 18.0 oz/yd²   |
| Effective pile mass           | 355 g/m²   | 10.5 oz/yd²   |
| Pile density                  | 0.127 g/cm³  | 0.0046 lb/in³ |
| Number of tufts               | 1580 /dm²  | 132104/yd²    |
| Stroll test                   | ≤ 2.0 kV   | ISO 6356      |
| Vertical resistance           | ≤ 1 x 10⁹ Ohm  | ISO 10965     |
| Use classification            | 33 Commercial - heavy use  | EN 1307       |
| Dimensional stability         | ≤ 0.2 %  | EN 986        |
| Impact sound reduction ΔLw    | 24 dB  | EN 1307       |
| Noise reduction               | 0.15 aₜ  | ISO 354       |
| Flammability                  | B₂ - s1 (loose laid tested)  | EN 13501-1    |
| Light Reflectance Value (LRV) | See right side page per colour   | BS 8493       |
| Colour Depth (L)              | See right side page per colour   | CIELAB        |


\* DESSO EcoBase® is a polyolefin based backing. Positively defined means: all ingredients have been assessed as either Green (optimal) or Yellow (tolerable) according to the Cradle to Cradle® assessment criteria. As described in Cradle to Cradle® Certified CM Product Standard Version 3.0. The total % of recycled content varies per product and per colour which can be found on our website: [www.tarkett.com](http://www.tarkett.com)

\*\* ECONYL® is a yarn made from 100% regenerated content. The total % of regenerated content varies per product and per colour. Whether a colour contains ECONYL® and the exact % thereof can be found on our website: [www.tarkett.com](http://www.tarkett.com)

With EcoBase™  
backing




2015 L 45,96 / LRV 15,24  
2023 L 40,62 / LRV 11,63  
2102 L 33,66 / LRV 7,84

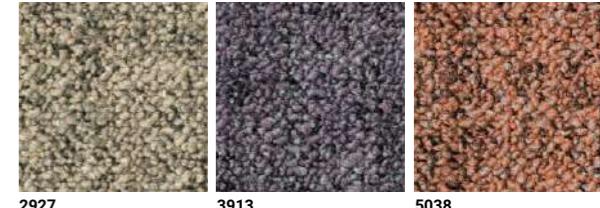


2927 L 59,44 / LRV 27,51  
3913 L 38,23 / LRV 10,22  
5038 L 47,33 / LRV 16,27




6022 L 47,28 / LRV 16,24  
7942 L 31,33 / LRV 6,79  
8832 L 34,81 / LRV 8,41

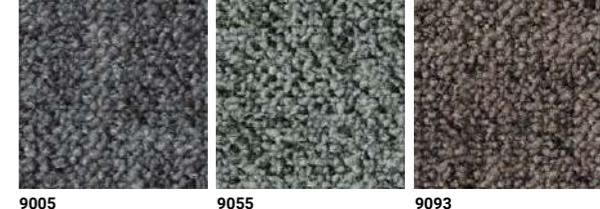

9005 L 36,88 / LRV 9,47  
9055 L 46,68 / LRV 15,77  
9093 L 38,41 / LRV 10,32

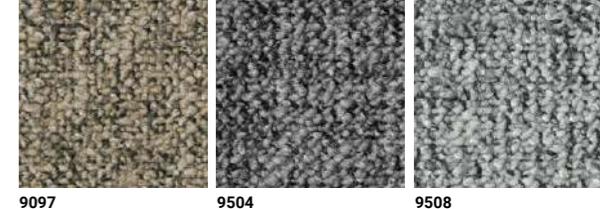


9097 L 50,14 / LRV 18,54  
9504 L 43,96 / LRV 13,81  
9508 L 58,41 / LRV 26,40

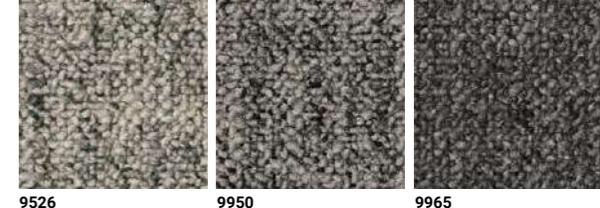

9526 L 55,73 / LRV 23,64  
9950 L 45,19 / LRV 14,68  
9965 L 34,25 / LRV 8,13

Broadloom available on request





#### Specification according to EN 1307

|  |   |                           |
|--|---|---------------------------|
| Type of manufacture                    | Needled   | ISO 2424                  |
| Aspect                                 | Pile needle felt                                      | ISO 2424                  |
| Dye method                             | Fibre dyed  |                           |
| Dimension                              | 50 cm x 50 cm / 19.68" x 19.68"<br>(20 tiles per box) | EN ISO 24342              |
| Primary backing                        | Polyester fleece                                      | ISO 2424                  |
| Secondary backing                      | ProBase - modified bitumen                            | ISO 2424                  |
| Pile fibre composition                 | BCF Polyamide 6                                       | ISO 2424                  |
| Total thickness                        | 9.0 mm  | 0.4 inch                  |
| Effective pile thickness               | 5.0 mm  | 0.20 inch                 |
| Total mass                             | 4950 g/m <sup>2</sup>                                 | 146.1 oz/yd <sup>2</sup>  |
| Total pile mass                        | 1340 g/m <sup>2</sup>                                 | 39.6 oz/yd <sup>2</sup>   |
| Effective pile mass                    | 500 g/m <sup>2</sup>                                  | 14.8 oz/yd <sup>2</sup>   |
| Pile density                           | 0.100 g/cm <sup>3</sup>                               | 0.0036 lb/in <sup>3</sup> |
| Number of tufts                        | - /dm <sup>2</sup>                                    | - /yd <sup>2</sup>        |
| Stroll test                            | ≤ 2.0 kV  | ISO 6356                  |
| Vertical resistance                    | -   | ISO 10965                 |
| Use classification                     | 33 Commercial - heavy use                             | EN 1307                   |
| Dimensional stability                  | ≤ 0,2%  | EN 986                    |
| Impact sound reduction ΔL <sub>w</sub> | 25 dB   | ISO 10140                 |
| Noise reduction                        | 0.25 α <sub>w</sub>                                   | ISO 354                   |
| Flammability                           | B <sub>fl</sub> - s1 (loose laid tested)              | EN 13501-1                |
| Light Reflectance Value (LRV)          | See right side page per colour                        | BS 8493                   |
| Colour Depth (L)                       | See right side page per colour                        | CIELAB                    |



**1708**  
L 38,82 / LRV 10,55



**8501**  
L 24,95 / LRV 4,40



**8801**  
L 20,92 / LRV 3,22




**9502**  
L 26,55 / LRV 4,94




**9990**  
L 17,84 / LRV 2,48



Quality- and Environmental  
Management System Certification  
ISO 9001 & ISO 14001



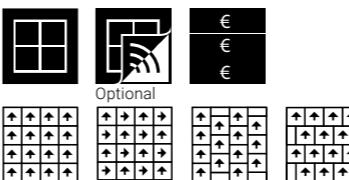

#### Preliminary specification according to EN 1307

|                               |  |               |
|-------------------------------|--|---------------|
| Type of manufacture           | Tufted 1/10 "  | ISO 2424      |
| Aspect                        | Structured loop pile   | ISO 2424      |
| Dye method                    | Solution dyed  |               |
| Dimension                     | 50 cm x 50 cm / 19.68" x 19.68"<br>(20 tiles per box)                          | EN ISO 24342  |
| Primary backing               | Polyester fleece   | ISO 2424      |
| Secondary backing             | DESSO EcoBase® * - Contains on average 80% positively defined recycled content | ISO 2424      |
| Pile fibre composition        | BCF Polyamide 6 ECONYL®<br>(ECONYL® is made from 100% regenerated content) **  | ISO 2424      |
| Total thickness               | 7.0 mm   | 0.3 inch      |
| Effective pile thickness      | 3.3 mm   | 0.13 inch     |
| Total mass                    | 4500 g/m²  | 132.8 oz/yd²  |
| Total pile mass               | 945 g/m²   | 27.9 oz/yd²   |
| Effective pile mass           | 615 g/m²   | 18.2 oz/yd²   |
| Pile density                  | 0.186 g/cm³  | 0.0067 lb/in³ |
| Number of tufts               | 1580 /dm²  | 132104 /yd²   |
| Stroll test                   | ≤ 2.0 kV   | ISO 6356      |
| Vertical resistance           | ≤ 1 x 10⁹ Ohm  | ISO 10965     |
| Use classification            | 33 Commercial - heavy use  | ISO 10965     |
| Dimensional stability         | ≤ 0,2%   | EN 1307       |
| Impact sound reduction ΔLw    | 23 dB  | ISO 10140     |
| Noise reduction               | 0.15 a_w   | ISO 354       |
| Flammability                  | Bfl - s1 (loose laid tested)   | EN 13501-1    |
| Light Reflectance Value (LRV) | See right side page per colour   | BS 8493       |
| Colour Depth (L)              | See right side page per colour   | CIELAB        |

\* DESSO EcoBase® is a polyolefin based backing. Positively defined means: all ingredients have been assessed as either Green (optimal) or Yellow (tolerable) according to the Cradle to Cradle® assessment criteria. As described in Cradle to Cradle® Certified CM Product Standard Version 3.0. The total % of recycled content varies per product and per colour which can be found on our website: [www.tarkett.com](http://www.tarkett.com)

\*\* ECONYL® is a yarn made from 100% regenerated content. The total % of regenerated content varies per product and per colour. Whether a colour contains ECONYL® and the exact % thereof can be found on our website: [www.tarkett.com](http://www.tarkett.com)

With EcoBase™  
backing



2017  
L 39,64 / LRV 11,03



2031  
L 34,81 / LRV 8,40




2083  
L 35,56 / LRV 8,78

2942  
L 30,78 / LRV 6,56



2915  
L 59,23 / LRV 27,28

2913  
L 53,68 / LRV 21,67

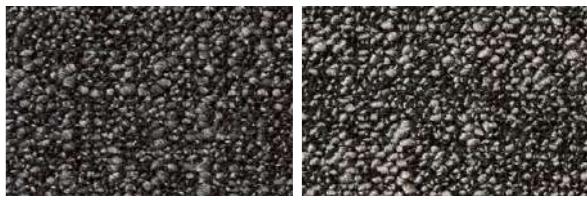


9031  
L 33,56 / LRV 7,80

9975  
L 41,44 / LRV 12,14



9950  
L 46,71 / LRV 15,80

9505  
L 49,60 / LRV 18,08

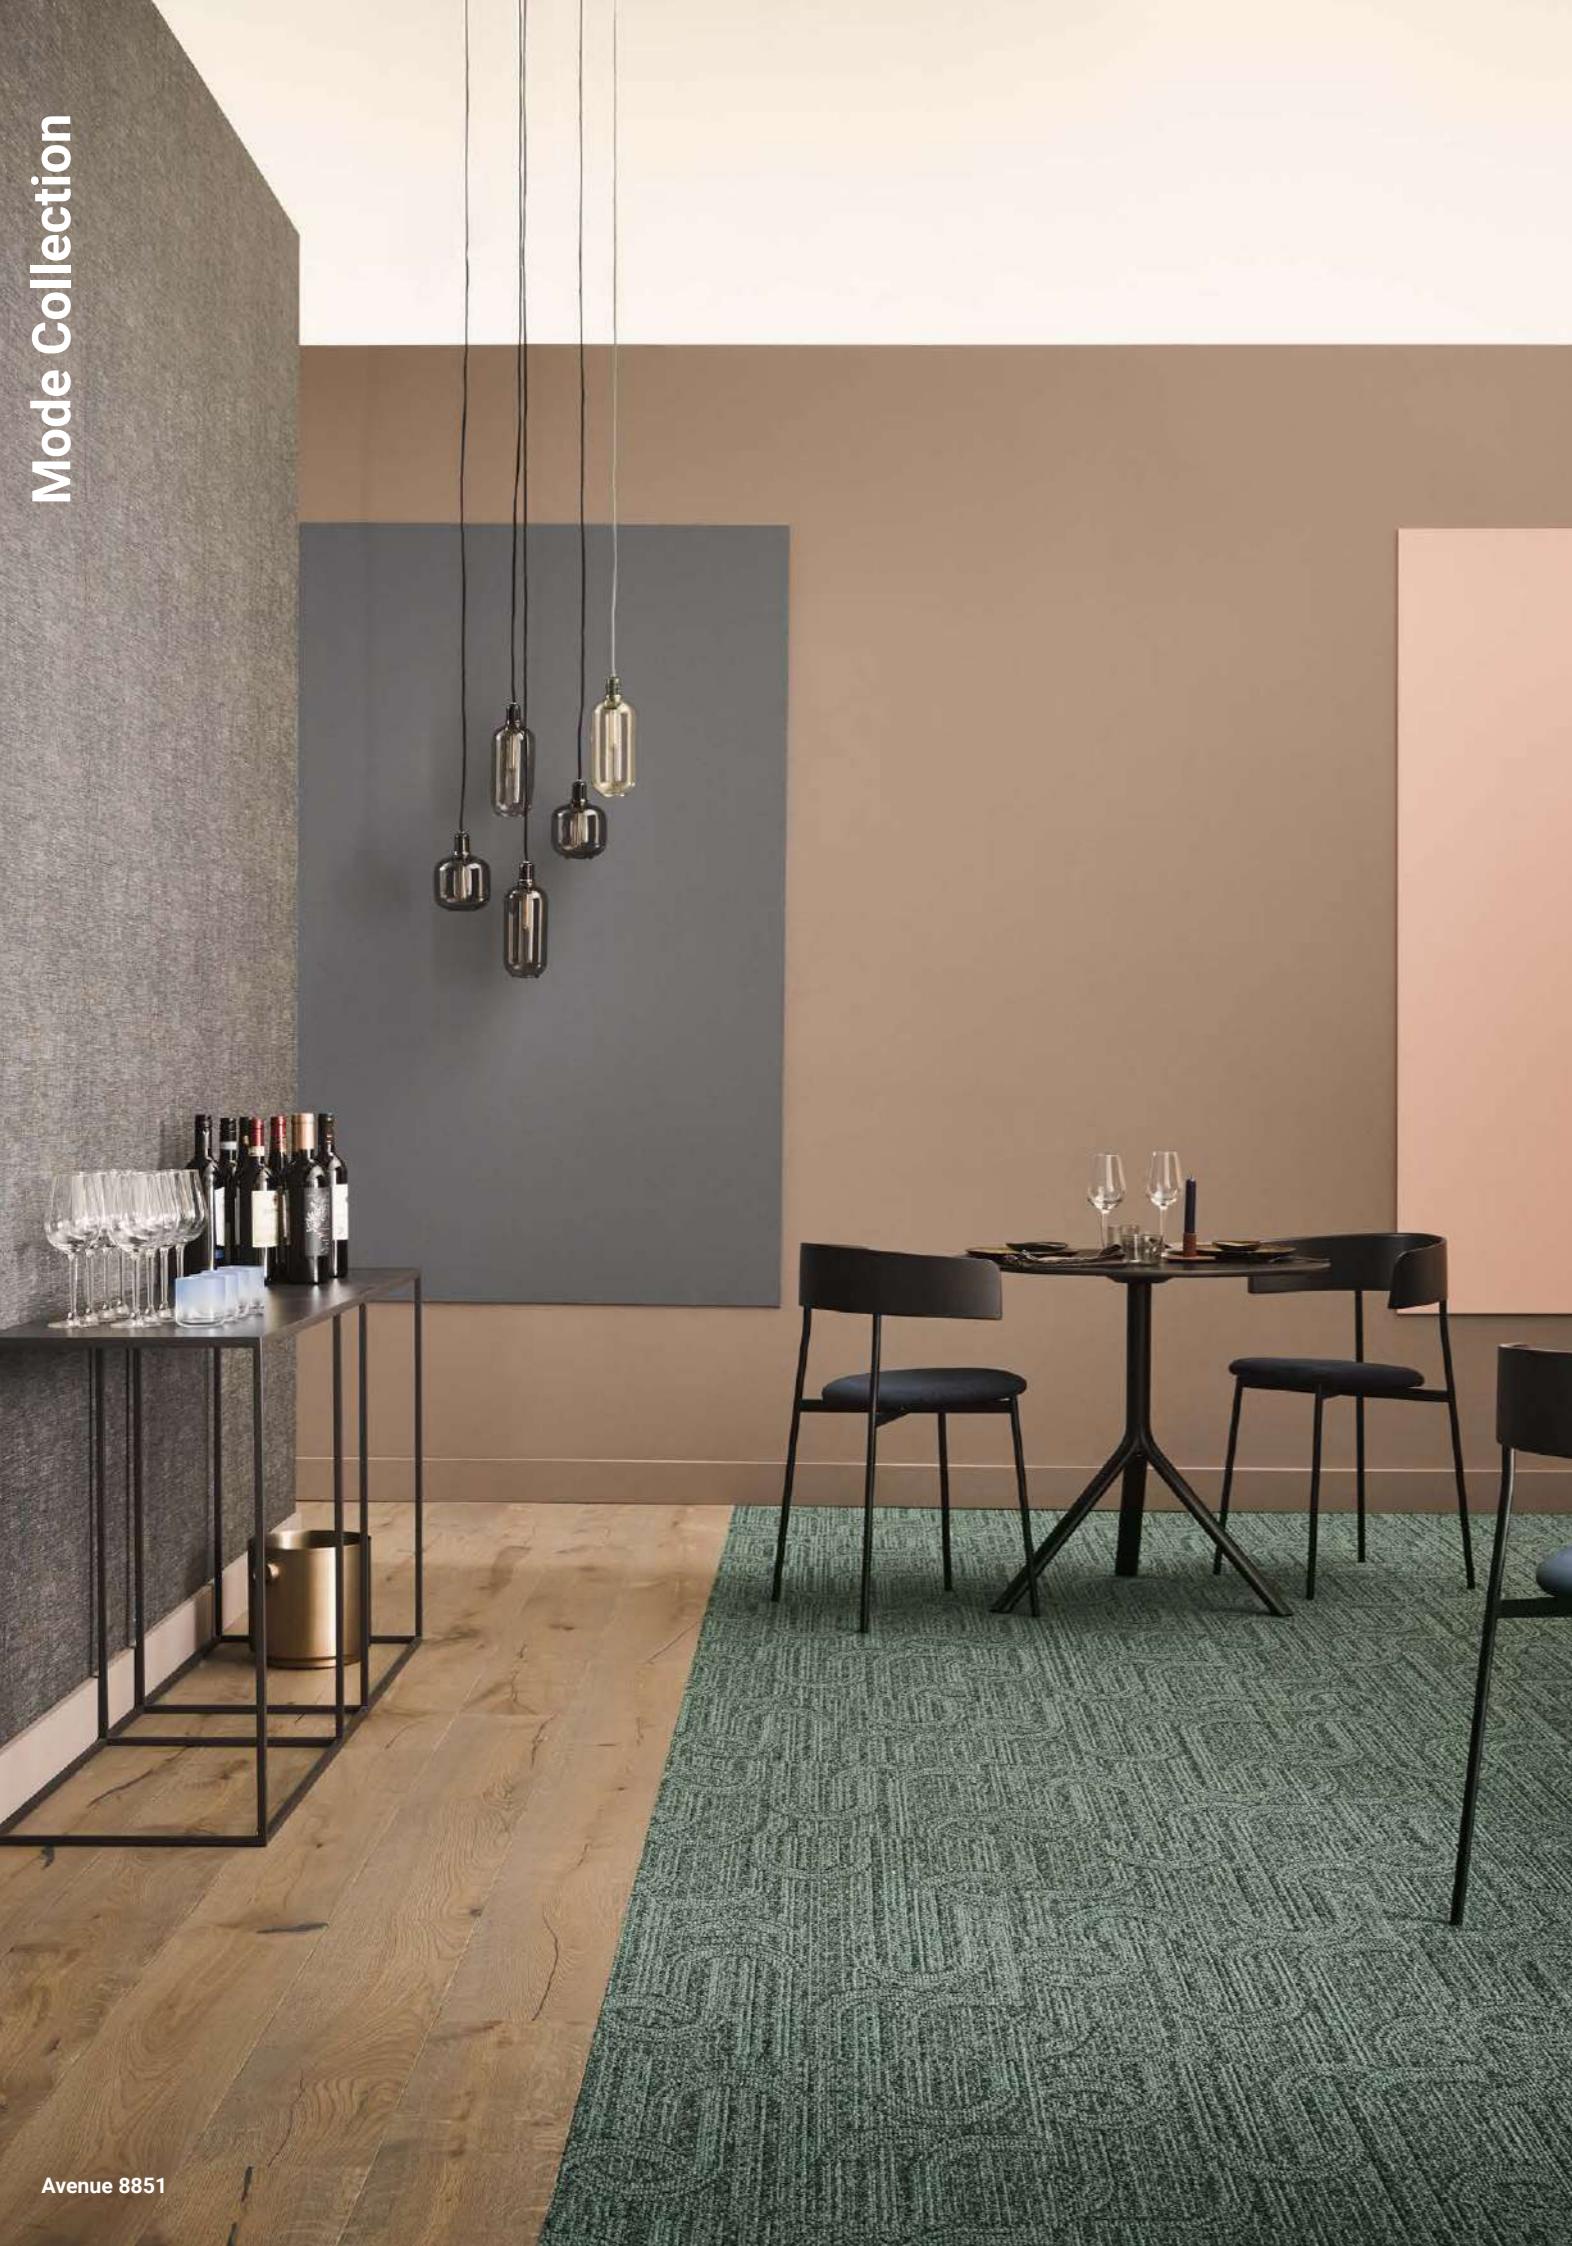

## Specification according to EN 1307

|                               |   |               |
|-------------------------------|---|---------------|
| Type of manufacture           | Tufted 1/10 "   | ISO 2424      |
| Aspect                        | Structured loop pile  | ISO 2424      |
| Dye method                    | Solution dyed   |               |
| Dimension                     | 50 cm x 50 cm / 19.68" x 19.68"<br>(20 tiles per box)                         | EN ISO 24342  |
| Primary backing               | Polyester fleece  | ISO 2424      |
| Secondary backing             | DESSO EcoBase® Soundmaster  | ISO 2424      |
|                               | Lite - contains on average 75% recycled content                               |               |
| Pile fibre composition        | BCF Polyamide 6 ECONYL®<br>(ECONYL® is made from 100% regenerated content) ** | ISO 2424      |
| Total thickness               | 10,0 mm   | 0.4 inch      |
| Effective pile thickness      | 5.0 mm  | 0.20 inch     |
| Total mass                    | 4450 g/m²   | 131.3 oz/yd²  |
| Total pile mass               | 840 g/m²  | 24.8 oz/yd²   |
| Effective pile mass           | 610 g/m²  | 18.0 oz/yd²   |
| Pile density                  | 0.122 g/cm³   | 0.0044 lb/in³ |
| Number of tufts               | 1580 /dm²   | 132104 /yd²   |
| Stroll test                   | ≤ 2.0 kV  | ISO 1763      |
| Vertical resistance           | -   | ISO 10965     |
| Use classification            | 33 Commercial - heavy use   | ISO 10965     |
| Dimensional stability         | ≤ 0,2%  | EN 1307       |
| Impact sound reduction ΔLw    | 35 dB   | ISO 10140     |
| Noise reduction               | 0.30 αw   | ISO 354       |
| Flammability                  | Cfl - s1 (loose laid tested)  | EN 13501-1    |
| Light Reflectance Value (LRV) | See right side page per colour  | BS 8493       |
| Colour Depth (L)              | See right side page per colour  | CIELAB        |

\* DESSO EcoBase® is a polyolefin based backing. Positively defined means: all ingredients have been assessed as either Green (optimal) or Yellow (tolerable) according to the Cradle to Cradle® assessment criteria. As described in Cradle to Cradle® Certified CM Product Standard Version 3.0. The total % of recycled content varies per product and per colour which can be found on our website: [www.tarkett.com](http://www.tarkett.com)

\*\* ECONYL® is a yarn made from 100% regenerated content. The total % of regenerated content varies per product and per colour. Whether a colour contains ECONYL® and the exact % thereof can be found on our website: [www.tarkett.com](http://www.tarkett.com)

With EcoBase  
backing  
without  
SoundMaster  
Lite



ECONYL®  
ENDLESS POSSIBILITIES




Quality- and Environmental  
Management System Certification  
ISO 9001 & ISO 14001



Manufactured by

Tarkett BV  
PO Box 169  
NL-5240 AD  
Waalwijk

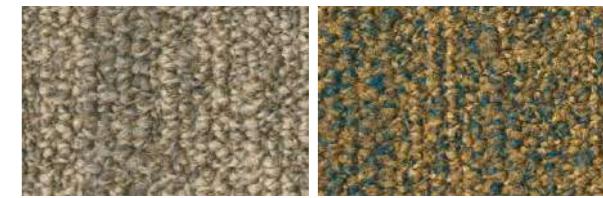

1660 L 65,50 / LRV 34,68  
2023 L 51,82 / LRV 19,98



2034 L 43,60 / LRV 13,56  
2076 L 35,05 / LRV 8,52



2082 L 26,20 / LRV 4,81  
2105 L 17,88 / LRV 2,49



2121 L 63,32 / LRV 31,97  
2905 L 53,44 / LRV 21,45



2925 L 23,42 / LRV 3,92  
2946 L 15,80 / LRV 2,06



2952 L 67,89 / LRV 37,82  
3901 L 57,60 / LRV 25,54




3923 L 39,61 / LRV 11,02  
3924 L 26,50 / LRV 4,92



4301 L 21,88 / LRV 3,48  
4332 L 57,44 / LRV 25,38

## Mode Collection

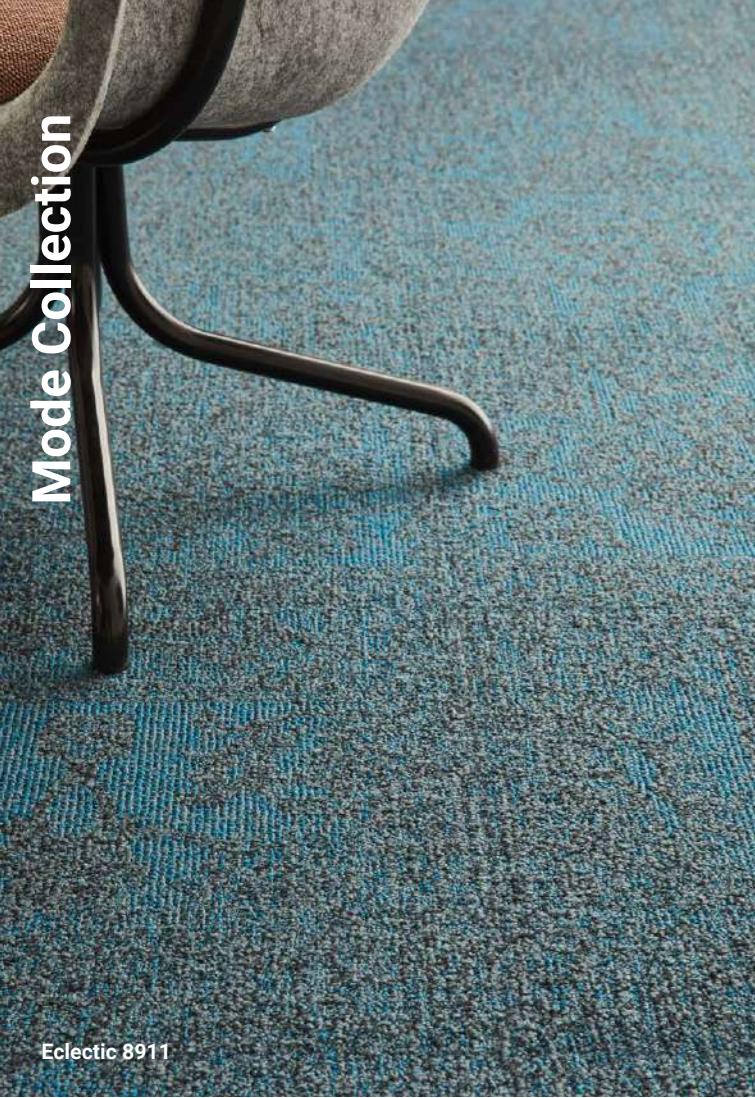

Eclectic 8911




Scenic 2076



Metropol 2021




Vista 2925

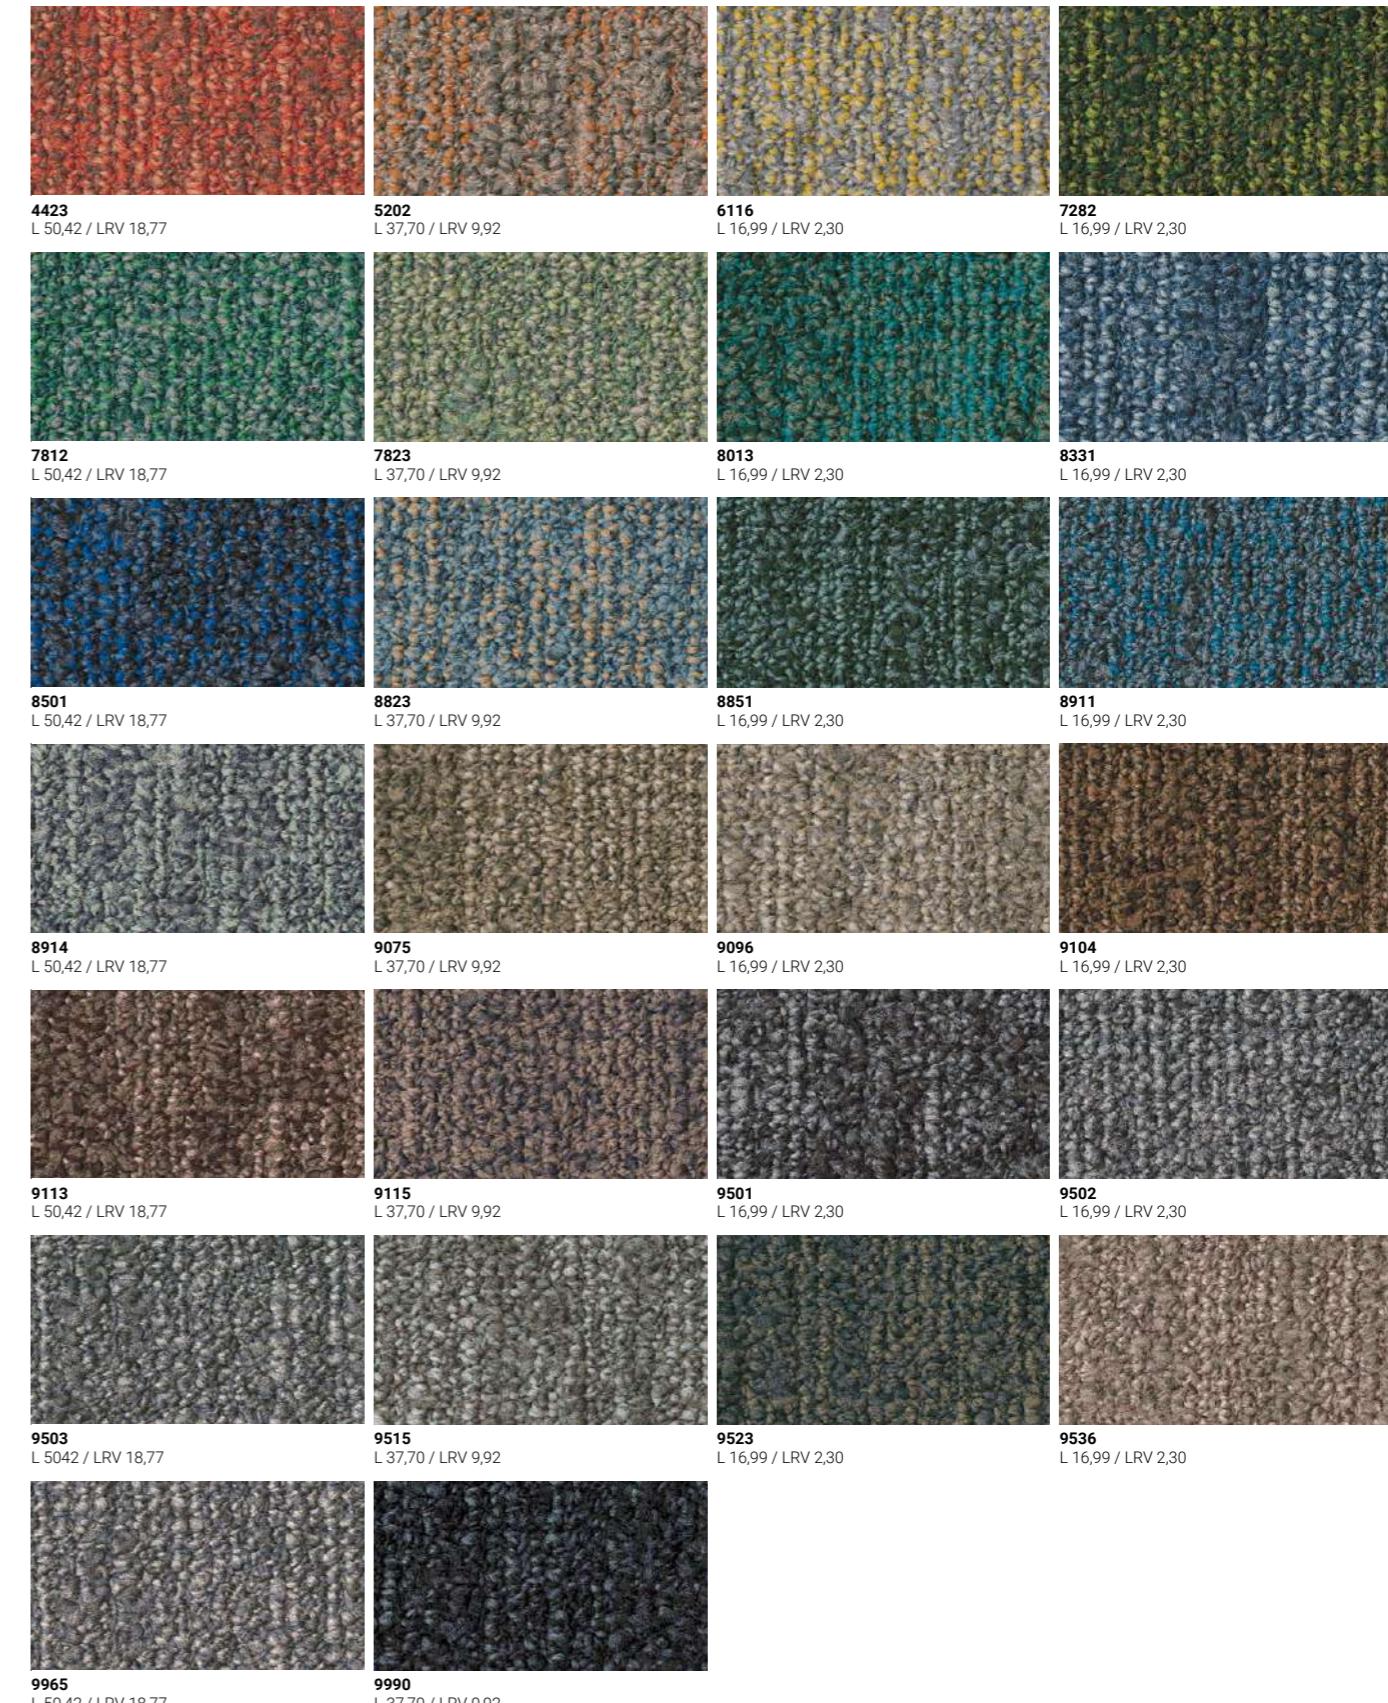


## Mode Collection

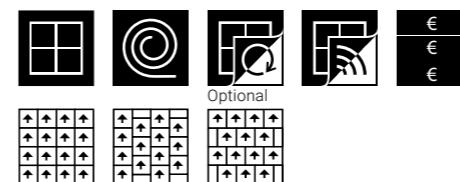


**Specification according to EN 1307**

|  |   |                           |
|--|---|---------------------------|
| Type of manufacture                    | Tufted 1/10 "   | ISO 2424                  |
| Aspect                                 | Cut pile  | ISO 2424                  |
| Dye method                             | Piece dyed continuous                                 |                           |
| Dimension                              | 50 cm x 50 cm / 19.68" x 19.68"<br>(20 tiles per box) | EN ISO 24342              |
| Primary backing                        | Polyester fleece                                      | ISO 2424                  |
| Secondary backing                      | ProBase - modified bitumen                            | ISO 2424                  |
| Pile fibre composition                 | BCF Polyamide 6.6                                     | ISO 2424                  |
| Total thickness                        | 8.0 mm  | 0.3 inch                  |
| Effective pile thickness               | 5.0 mm  | 0.20 inch                 |
| Total mass                             | 4450 g/m <sup>2</sup>                                 | 131.3 oz/yd <sup>2</sup>  |
| Total pile mass                        | 1100 g/m <sup>2</sup>                                 | 32.5 oz/yd <sup>2</sup>   |
| Effective pile mass                    | 845 g/m <sup>2</sup>                                  | 24.9 oz/yd <sup>2</sup>   |
| Pile density                           | 0.169 g/cm <sup>3</sup>                               | 0.0061 lb/in <sup>3</sup> |
| Number of tufts                        | 1500 /dm <sup>2</sup>                                 | 125415 /yd <sup>2</sup>   |
| Stroll test                            | ≤ 2.0 kV  | ISO 6356                  |
| Use classification                     | 33 Commercial - heavy use                             | EN 1307                   |
| Dimensional stability                  | ≤ 0.2 %   | EN 986                    |
| Impact sound reduction ΔL <sub>w</sub> | 27 dB   | ISO 10140                 |
| Noise reduction                        | 0.15 α <sub>w</sub>                                   | ISO 354                   |
| Flammability                           | B <sub>r</sub> - s1 (loose laid tested)               | EN 13501-1                |
| Light Reflectance Value (LRV)          | See right side page per colour                        | BS 8493                   |
| Colour Depth (L)                       | See right side page per colour                        | CIELAB                    |

With ProBase™  
backing      With EcoBase™  
backing

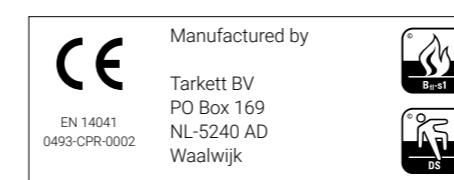

**1318**  
L 58,02 / LRV 25,98



**1321**  
L 62,11 LRV 30,53




**1510**  
L 59,68 / LRV 27,77



**2036**  
L 49,91 / LRV 18,35



**2121**  
L 20,14 / LRV 3,02

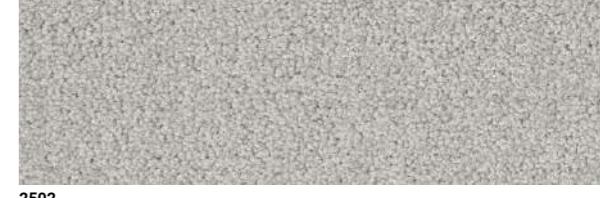

**2502**  
L 68,08 / LRV 38,08



**2923**  
L 49,15 / LRV 17,72



**2928**  
L 70,73 / LRV 41,79

## Palatino



**2929**  
L 43,72 / LRV 13,64



**3500**  
L 60,82 / LRV 29,04



**3502**  
L 51,16 / LRV 19,41



**3841**  
L 18,19 / LRV 2,56

**3911**  
L 19,92 / LRV 2,97

**4000**  
L 56,94 / LRV 24,86



**4020**  
L 22,53 / LRV 3,66

**4107**  
L 32,98 / LRV 7,53

**4212**  
L 44,61 / LRV 14,27



**4218**  
L 26,59 / LRV 4,95

**4301**  
L 31,82 / LRV 7,01

**4406**  
L 33,09 / LRV 7,58



**5206**  
L 45,98 / LRV 15,25

**5502**  
L 47,26 / LRV 16,21

**6016**  
L 54,87 / LRV 22,80



**6208**  
L 64,66 / LRV 33,61

**6502**  
L 39,87 / LRV 11,17


**7018**  
L 54,48 / LRV 22,43



**7121**  
L 34,61 / LRV 8,30

**8073**  
L 44,59 / LRV 14,25

**8111**  
L 31,22 / LRV 6,75

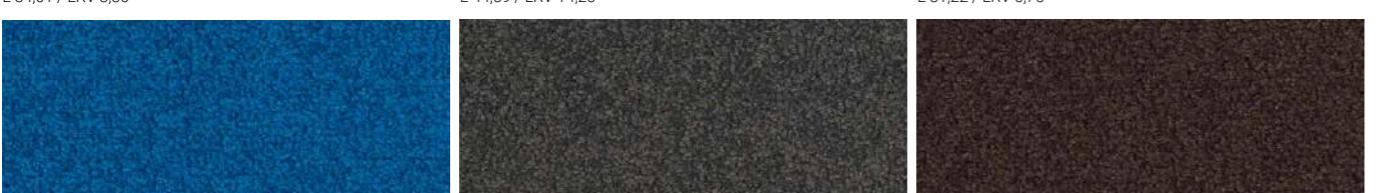

**8412**  
L 31,21 / LRV 6,74

**8500**  
L 29,20 / LRV 5,92

**8505**  
L 22,55 / LRV 3,67

## Palatino



**8512**  
L 24,51 / LRV 4,26



**8803**  
L 36,30 / LRV 9,16



**8814**  
L 55,47 / LRV 23,38



**8823**  
L 44,25 / LRV 14,01





**9022**  
L 33,21 / LRV 7,63




**9081**  
L 15,27 / LRV 1,96




**9104**  
L 34,84 / LRV 8,42





#### Specification according to EN 1307

|                               |   |                           |
|-------------------------------|---|---------------------------|
| Type of manufacture           | Tufted 1/8"   | ISO 2424                  |
| Aspect                        | Cut pile  | ISO 2424                  |
| Dye method                    | Hank dyed   |                           |
| Dimension                     | 50 cm x 50 cm / 19.68" x 19.68"<br>(16 tiles per box) | EN ISO 24342              |
| Primary backing               | Polyester fleece                                      | ISO 2424                  |
| Secondary backing             | ProBase - modified bitumen                            | ISO 2424                  |
| Pile fibre composition        | 80% wool - 20% polyamide                              | ISO 2424                  |
| Total thickness               | 10.0 mm   | 0.4 inch                  |
| Effective pile thickness      | 5.2 mm  | 0.20 inch                 |
| Total mass                    | 4800 g/m <sup>2</sup>                                 | 141.7 oz/yd <sup>2</sup>  |
| Total pile mass               | 1470 g/m <sup>2</sup>                                 | 43.4 oz/yd <sup>2</sup>   |
| Effective pile mass           | 790 g/m <sup>2</sup>                                  | 23.3 oz/yd <sup>2</sup>   |
| Pile density                  | 0.152 g/cm <sup>3</sup>                               | 0.0055 lb/in <sup>3</sup> |
| Number of tufts               | 1110 /dm <sup>2</sup>                                 | 92807 /yd <sup>2</sup>    |
| Flammability                  | C <sub>fl</sub> - s1 (loose laid tested)              | EN 13501-1                |
| Light Reflectance Value (LRV) | See right side page per colour                        | BS 8493                   |
| Colour Depth (L)              | See right side page per colour                        | CIELAB                    |

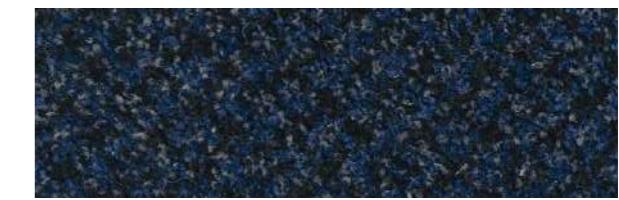

**8901**  
L 16,56 / LRV 2,21



**9990**  
L 21,55 / LRV 3,39



**9021**  
L 23,18 / LRV 3,85



**2922**  
L 32,31 / LRV 7,22

Quality- and Environmental  
Management System Certification  
ISO 9001 & ISO 14001




Manufactured by  
Tarkett BV  
PO Box 169  
NL-5240 AD  
Waalwijk





Recharge

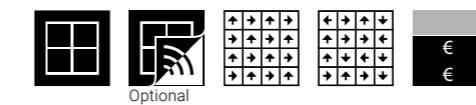

## Specification according to EN 1307

|                               |  |               |
|-------------------------------|--|---------------|
| Type of manufacture           | Tufted 1/10 "  | ISO 2424      |
| Aspect                        | Structured loop pile   | ISO 2424      |
| Dye method                    | Solution dyed  |               |
| Dimension                     | 50 cm x 50 cm / 19.68" x 19.68"<br>(20 tiles per box)                          | EN ISO 24342  |
| Primary backing               | Polyester fleece   | ISO 2424      |
| Secondary backing             | DESSO EcoBase® * - Contains on average 80% positively defined recycled content | ISO 2424      |
| Pile fibre composition        | BCF Polyamide 6 ECONYL®<br>(ECONYL® is made from 100% regenerated content) **  | ISO 2424      |
| Total thickness               | 6.5 mm   | 0.3 inch      |
| Effective pile thickness      | 2.8 mm   | 0.11 inch     |
| Total mass                    | 4050 g/m²  | 119.5 oz/yd²  |
| Total pile mass               | 600 g/m²   | 17.7 oz/yd²   |
| Effective pile mass           | 345 g/m²   | 10.2 oz/yd²   |
| Pile density                  | 0.123 g/cm³  | 0.0044 lb/in³ |
| Number of tufts               | 1580 /dm²  | 132104 /yd²   |
| Stroll test                   | ≤ 2.0 kV   | ISO 1763      |
| Vertical resistance           | ≤ 1 x 10⁹ Ohm  | ISO 10965     |
| Use classification            | 33 Commercial - heavy use  | ISO 10965     |
| Dimensional stability         | ≤ 0,2%   | EN 1307       |
| Impact sound reduction ΔLw    | 23 dB  | ISO 10140     |
| Noise reduction               | 0.15 a <sub>w</sub>  | ISO 354       |
| Flammability                  | B <sub>r</sub> - s1 (loose laid tested)  | EN 13501-1    |
| Light Reflectance Value (LRV) | See right side page per colour   | BS 8493       |
| Colour Depth (L)              | See right side page per colour   | CIELAB        |

\* DESSO EcoBase® is a polyolefin based backing. Positively defined means: all ingredients have been assessed as either Green (optimal) or Yellow (tolerable) according to the Cradle to Cradle® assessment criteria. As described in Cradle to Cradle® Certified CM Product Standard Version 3.0. The total % of recycled content varies per product and per colour which can be found on our website: [www.tarkett.com](http://www.tarkett.com)

\*\* ECONYL® is a yarn made from 100% regenerated content. The total % of regenerated content varies per product and per colour. Whether a colour contains ECONYL® and the exact % thereof can be found on our website: [www.tarkett.com](http://www.tarkett.com)


With EcoBase™  
backing

3D TEXTURES

Recharge



A

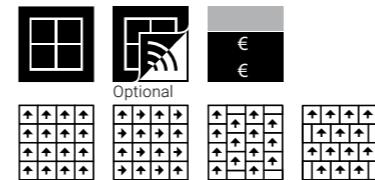

## Specification according to EN 1307

|                               |  |               |
|-------------------------------|--|---------------|
| Type of manufacture           | Tufted 1/10 "  | ISO 2424      |
| Aspect                        | Structured loop pile   | ISO 2424      |
| Dye method                    | Solution dyed  |               |
| Dimension                     | 50 cm x 50 cm / 19.68" x 19.68"<br>(20 tiles per box)                          | EN ISO 24342  |
| Primary backing               | Polyester fleece   | ISO 2424      |
| Secondary backing             | DESSO EcoBase® * - Contains on average 80% positively defined recycled content | ISO 2424      |
| Pile fibre composition        | BCF Polyamide 6 ECONYL®<br>(ECONYL® is made from 100% regenerated content) **  | ISO 2424      |
| Total thickness               | 6.0 mm   | 0.2 inch      |
| Effective pile thickness      | 2.8 mm   | 0.11 inch     |
| Total mass                    | 3800 g/m²  | 112.2 oz/yd²  |
| Total pile mass               | 600 g/m²   | 17.7 oz/yd²   |
| Effective pile mass           | 355 g/m²   | 10.5 oz/yd²   |
| Pile density                  | 0.127 g/cm³  | 0.0046 lb/in³ |
| Number of tufts               | 1580 /dm²  | 132104 /yd²   |
| Stroll test                   | ≤ 2.0 kV   | ISO 6356      |
| Vertical resistance           | ≤ 1 x 10⁹ Ohm  | ISO 10965     |
| Use classification            | 33 Commercial - heavy use  | ISO 10965     |
| Dimensional stability         | ≤ 0.2 %  | EN 1307       |
| Impact sound reduction ΔLw    | 23 dB  | ISO 10140     |
| Noise reduction               | 0.15 a_w   | ISO 354       |
| Flammability                  | Bfl - s1 (loose laid tested)   | EN 13501-1    |
| Light Reflectance Value (LRV) | See right side page per colour   | BS 8493       |
| Colour Depth (L)              | See right side page per colour   | CIELAB        |


\* DESSO EcoBase® is a polyolefin based backing. Positively defined means: all ingredients have been assessed as either Green (optimal) or Yellow (tolerable) according to the Cradle to Cradle® assessment criteria. As described in Cradle to Cradle® Certified CM Product Standard Version 3.0. The total % of recycled content varies per product and per colour which can be found on our website: [www.tarkett.com](http://www.tarkett.com)

\*\* ECONYL® is a yarn made from 100% regenerated content. The total % of regenerated content varies per product and per colour. Whether a colour contains ECONYL® and the exact % thereof can be found on our website: [www.tarkett.com](http://www.tarkett.com)


With EcoBase™  
backing




1510 L 62,05 / LRV 30,46  
2024 L 47,31 / LRV 16,21  
2075 L 47,63 / LRV 16,50

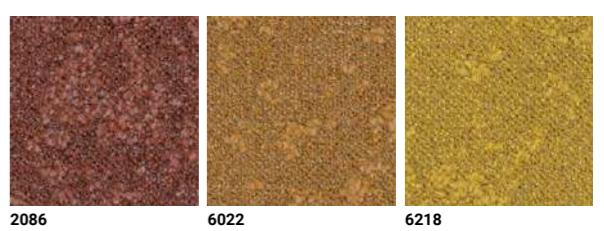

2086 L 36,49 / LRV 9,27  
6022 L 48,53 / LRV 17,22  
6218 L 55,60 / LRV 23,52

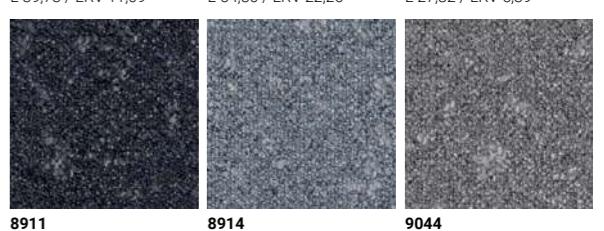

7933 L 39,73 / LRV 11,09  
7945 L 54,30 / LRV 22,26  
7952 L 27,82 / LRV 5,39

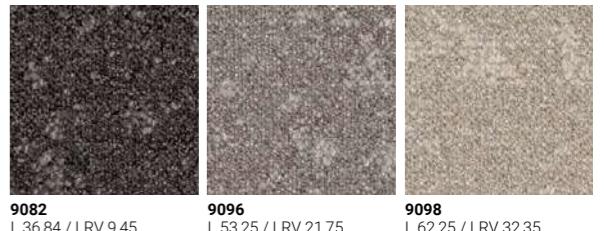


8911 L 29,30 / LRV 5,96  
8914 L 50,04 / LRV 18,45  
9044 L 50,51 / LRV 18,85



9082 L 36,84 / LRV 9,45  
9096 L 53,25 / LRV 21,75  
9098 L 62,25 / LRV 32,35



9503 L 35,22 / LRV 8,61  
9504 L 41,71 / LRV 12,31  
9524 L 42,11 / LRV 12,57

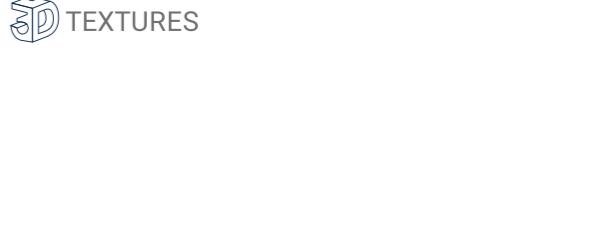

9526 L 55,03 / LRV 22,96  
9990 L 21,41 / LRV 3,35

3D TEXTURES



#### Preliminary specification according to EN 1307


|                               |   |               |
|-------------------------------|---|---------------|
| Type of manufacture           | Tufted 1/10 "   | ISO 2424      |
| Aspect                        | Loop pile   | ISO 2424      |
| Dye method                    | Solution dyed   |               |
| Dimension                     | 50 cm x 50 cm / 19.68" x 19.68"<br>(20 tiles per box)                           | EN ISO 24342  |
| Primary backing               | Polyester fleece  | ISO 2424      |
| Secondary backing             | ProBase - modified bitumen  | ISO 2424      |
| Pile fibre composition        | BCF Polyamide 6 and ECONYL®<br>(ECONYL® is made from 100% regenerated content)* | ISO 2424      |
| Total thickness               | 7.0 mm  | 0.3 inch      |
| Effective pile thickness      | 3.6 mm  | 0.14 inch     |
| Total mass                    | 4200 g/m²   | 124.0 oz/yd²  |
| Total pile mass               | 685 g/m²  | 20.2 oz/yd²   |
| Effective pile mass           | 420 g/m²  | 12.4 oz/yd²   |
| Pile density                  | 0.117 g/cm³   | 0.0042 lb/in³ |
| Number of tufts               | 950 /dm²  | 79430 /yd²    |
| Stroll test                   | ≤ 2.0 kV  | ISO 6356      |
| Vertical resistance           | ≤ 1 x 10⁹ Ohm   | ISO 10965     |
| Use classification            | 33 Commercial - heavy use   | EN 1307       |
| Dimensional stability         | ≤ 0.2 %   | EN 986        |
| Impact sound reduction ΔLw    | 25 dB   | ISO 10140     |
| Noise reduction               | 0.20 αw   | ISO 354       |
| Flammability                  | Bfl - s1 (loose laid tested)  | EN 13501-1    |
| Light Reflectance Value (LRV) | See right side page per colour  | BS 8493       |
| Colour Depth (L)              | See right side page per colour  | CIELAB        |

\* ECONYL® is a yarn made from 100% regenerated content. The total % of regenerated content varies per product and per colour. Whether a colour contains ECONYL® and the exact % thereof can be found on our website: [www.tarkett.com](http://www.tarkett.com)

With ProBase™  
backing




With EcoBase™  
backing

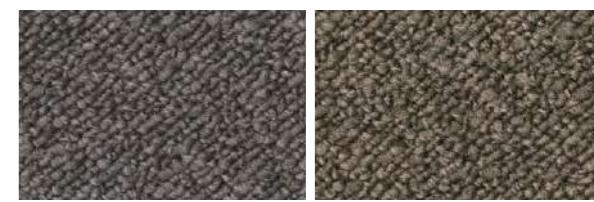

2035 L 37,47 / LRV 9,79  
2913 L 40,31 / LRV 11,44



4311 L 27,46 / LRV 5,26  
6102 L 54,29 / LRV 22,24

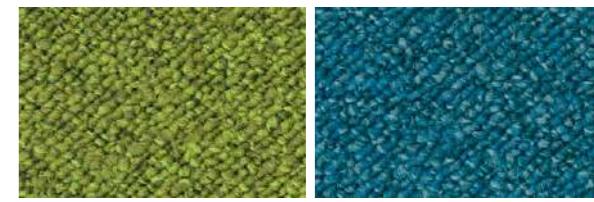

7065 L 49,05 / LRV 17,63  
8113 L 39,52 / LRV 10,96



9104 L 27,81 / LRV 5,39  
9511 L 26,92 / LRV 5,07




9512 L 21,86 / LRV 3,48  
9514 L 32,70 / LRV 7,40



9524 L 42,07 / LRV 12,54  
9960 L 40,56 / LRV 11,59



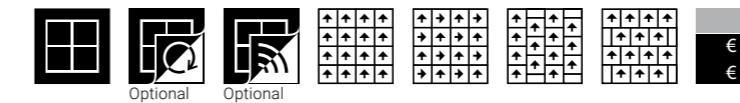

#### Specification according to EN 1307

|                               |   |                |
|-------------------------------|---|----------------|
| Type of manufacture           | Tufted 1/10 "   | ISO 2424       |
| Aspect                        | Loop pile   | ISO 2424       |
| Dye method                    | Solution dyed   |                |
| Dimension                     | 50 cm x 50 cm / 19.68" x 19.68"<br>(20 tiles per box)                           | EN ISO 24342   |
| Primary backing               | Polyester fleece  | ISO 2424       |
| Secondary backing             | ProBase - modified bitumen  | ISO 2424       |
| Pile fibre composition        | BCF Polyamide 6 and ECONYL®<br>(ECONYL® is made from 100% regenerated content)* | ISO 2424       |
| Total thickness               | 7.0 mm  | 0.3 inch       |
| Effective pile thickness      | 3.9 mm  | 0.15 inch      |
| Total mass                    | 4100 g/m²   | 121.0 oz/yd²   |
| Total pile mass               | 680 g/m²  | 20.1 oz/yd²    |
| Effective pile mass           | 435 g/m²  | 12.8 oz/yd²    |
| Pile density                  | 0.112 g/cm³   | 0.0040/ lb/in³ |
| Number of tufts               | 1540 /dm²   | 128759 /yd²    |
| Stroll test                   | ≤ 2.0 kV  | ISO 6356       |
| Vertical resistance           | ≤ 1 x 10⁹ Ohm   | ISO 10965      |
| Use classification            | 33 Commercial - heavy use   | EN 1307        |
| Dimensional stability         | ≤ 0.2 %   | EN 986         |
| Impact sound reduction ΔLw    | 28 dB   | ISO 10140      |
| Noise reduction               | 0.15 a <sub>w</sub>   | ISO 354        |
| Flammability                  | B <sub>r1</sub> - s1 (loose laid tested)  | EN 13501-1     |
| Light Reflectance Value (LRV) | See right side page per colour  | BS 8493        |
| Colour Depth (L)              | See right side page per colour  | CIELAB         |

\* ECONYL® is a yarn made from 100% regenerated content. The total % of regenerated content varies per product and per colour. Whether a colour contains ECONYL® and the exact % thereof can be found on our website: [www.tarkett.com](http://www.tarkett.com)


With ProBase™  
backing




With EcoBase™  
backing




4312  
L 26,70 / LRV 4,99

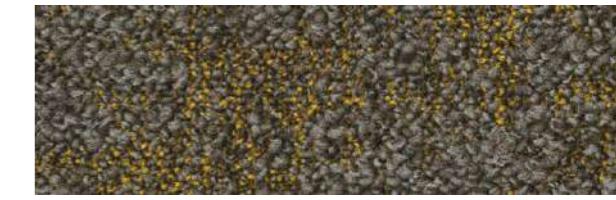

6112  
L 39,34 / LRV 10,86

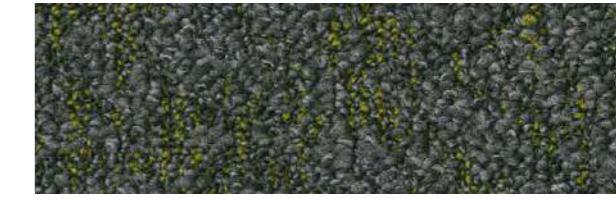

7061  
L 34,14 / LRV 8,07

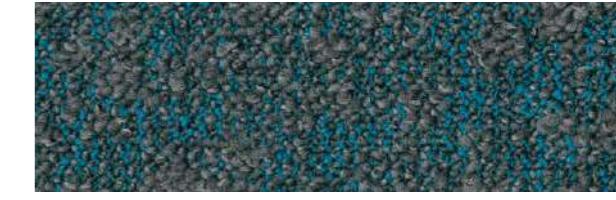

8102  
L 36,64 / LRV 9,34



9521  
L 19,53 / LRV 2,87



9975  
L 26,56 / LRV 4,94



## Specification according to EN 1307

|                               |  |                |
|-------------------------------|--|----------------|
| Type of manufacture           | Tufted 1/10 "  | ISO 2424       |
| Aspect                        | Structured loop pile   | ISO 2424       |
| Dye method                    | Solution dyed  |                |
| Dimension                     | 50 cm x 50 cm / 19.68" x 19.68"<br>(20 tiles per box)                          | EN ISO 24342   |
| Primary backing               | Polyester fleece   | ISO 2424       |
| Secondary backing             | DESSO EcoBase® * - Contains on average 80% positively defined recycled content | ISO 2424       |
| Pile fibre composition        | BCF Polyamide 6 ECONYL®<br>(ECONYL® is made from 100% regenerated content) **  | ISO 2424       |
| Total thickness               | 6.0 mm   | 0.2 inch       |
| Effective pile thickness      | 2.8 mm   | 0.11 inch      |
| Total mass                    | 3950 g/m²  | 116.6 oz/yd²   |
| Total pile mass               | 585 g/m²   | 17.3 oz/yd²    |
| Effective pile mass           | 335 g/m²   | 9.9 oz/yd²     |
| Pile density                  | 0.120 g/cm³  | 0.0043/ lb/in³ |
| Number of tufts               | 1540 /dm²  | 128759 /yd²    |
| Stroll test                   | ≤ 2.0 kV   | ISO 6356       |
| Vertical resistance           | ≤ 1 x 10⁹ Ohm  | ISO 10965      |
| Use classification            | 33 Commercial - heavy use  | EN 1307        |
| Dimensional stability         | ≤ 0.2 %  | EN 986         |
| Impact sound reduction ΔLw    | 24 dB  | ISO 10140      |
| Noise reduction               | 0.15 a_w   | ISO 354        |
| Flammability                  | Bfl - s1 (loose laid tested)   | EN 13501-1     |
| Light Reflectance Value (LRV) | See right side page per colour   | BS 8493        |
| Colour Depth (L)              | See right side page per colour   | CIELAB         |

\* DESSO EcoBase® is a polyolefin based backing. Positively defined means: all ingredients have been assessed as either Green (optimal) or Yellow (tolerable) according to the Cradle to Cradle® assessment criteria. As described in Cradle to Cradle® Certified CM Product Standard Version 3.0. The total % of recycled content varies per product and per colour which can be found on our website: [www.tarkett.com](http://www.tarkett.com)

\*\* ECONYL® is a yarn made from 100% regenerated content. The total % of regenerated content varies per product and per colour. Whether a colour contains ECONYL® and the exact % thereof can be found on our website: [www.tarkett.com](http://www.tarkett.com)

With EcoBase™  
backing




9033  
L 34,41 / LRV 8,25

9035  
L 50,19 / LRV 18,79



9037  
L 56,59 / LRV 24,54

9526  
L 61,98 / LRV 30,46

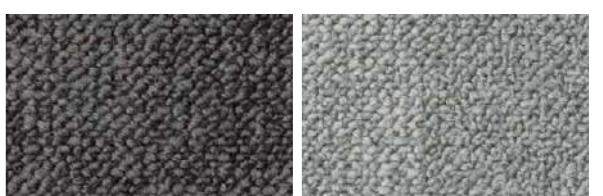

9850  
L 25,00 / LRV 4,51

9935  
L 56,77 / LRV 24,74



9950  
L 48,75 / LRV 16,66

9960  
L 42,68 / LRV 12,99



9975  
L 37,14 / LRV 9,71






Serene Colour



Serene Colour 6113 / Serene 9526







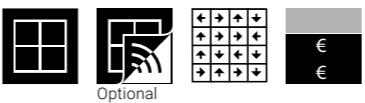


## Specification according to EN 1307

|                               |  |                |
|-------------------------------|--|----------------|
| Type of manufacture           | Tufted 1/10 "  | ISO 2424       |
| Aspect                        | Structured loop pile   | ISO 2424       |
| Dye method                    | Solution dyed  |                |
| Dimension                     | 50 cm x 50 cm / 19.68" x 19.68"<br>(20 tiles per box)                          | EN ISO 24342   |
| Primary backing               | Polyester fleece   | ISO 2424       |
| Secondary backing             | DESSO EcoBase® * - Contains on average 80% positively defined recycled content | ISO 2424       |
| Pile fibre composition        | BCF Polyamide 6 ECONYL®<br>(ECONYL® is made from 100% regenerated content) **  | ISO 2424       |
| Total thickness               | 6.0 mm   | 0.2 inch       |
| Effective pile thickness      | 2.8 mm   | 0.11 inch      |
| Total mass                    | 3950 g/m²  | 116.6 oz/yd²   |
| Total pile mass               | 585 g/m²   | 17.3 oz/yd²    |
| Effective pile mass           | 335 g/m²   | 9.9 oz/yd²     |
| Pile density                  | 0.120 g/cm³  | 0.0043/ lb/in³ |
| Number of tufts               | 1540 /dm²  | 128759 /yd²    |
| Stroll test                   | ≤ 2.0 kV   | ISO 6356       |
| Vertical resistance           | ≤ 1 x 10⁹ Ohm  | ISO 10965      |
| Use classification            | 33 Commercial - heavy use  | EN 1307        |
| Dimensional stability         | ≤ 0.2 %  | EN 986         |
| Impact sound reduction ΔLw    | 24 dB  | ISO 10140      |
| Noise reduction               | 0.15 a <sub>w</sub>  | ISO 354        |
| Flammability                  | B <sub>f1</sub> - s1 (loose laid tested)                                       | EN 13501-1     |
| Light Reflectance Value (LRV) | See right side page per colour   | BS 8493        |
| Colour Depth (L)              | See right side page per colour   | CIELAB         |

\* DESSO EcoBase® is a polyolefin based backing. Positively defined means: all ingredients have been assessed as either Green (optimal) or Yellow (tolerable) according to the Cradle to Cradle® assessment criteria. As described in Cradle to Cradle® Certified CM Product Standard Version 3.0. The total % of recycled content varies per product and per colour which can be found on our website: [www.tarkett.com](http://www.tarkett.com)

\*\* ECONYL® is a yarn made from 100% regenerated content. The total % of regenerated content varies per product and per colour. Whether a colour contains ECONYL® and the exact % thereof can be found on our website: [www.tarkett.com](http://www.tarkett.com)

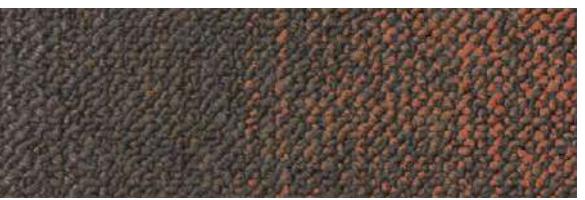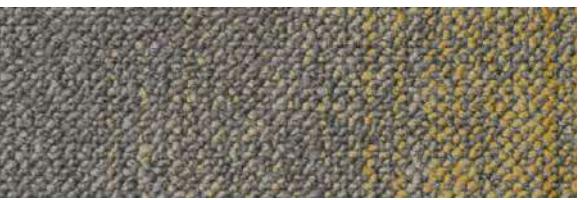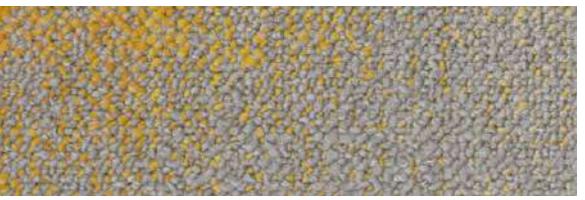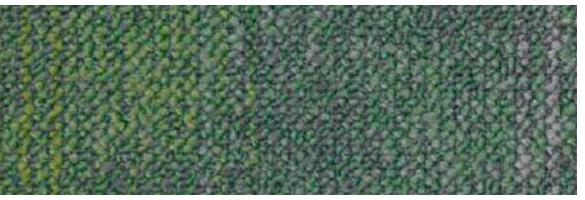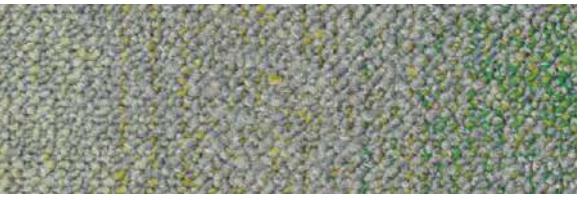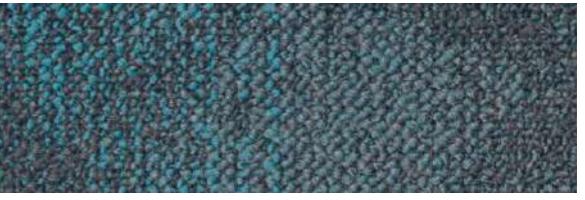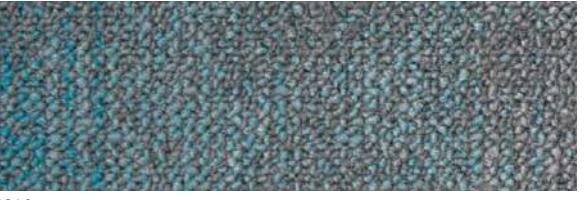With EcoBase™  
backing2087  
L 33,05 / LRV 7,575031  
L 45,18 / LRV 14,756102  
L 48,49 / LRV 17,266113  
L 60,25 / LRV 28,447373  
L 47,04 / LRV 16,147374  
L 55,71 / LRV 23,758212  
L 32,63 / LRV 7,408214  
L 47,16 / LRV 16,27

Serene Colour






## Preliminary specification according to EN 1307

|                               |  |               |
|-------------------------------|--|---------------|
| Type of manufacture           | Tufted 1/10 "  | ISO 2424      |
| Aspect                        | Structured loop pile   | ISO 2424      |
| Dye method                    | Solution dyed  |               |
| Dimension                     | 50 cm x 50 cm / 19.68" x 19.68"<br>(20 tiles per box)                          | EN ISO 24342  |
| Primary backing               | Polyester fleece   | ISO 2424      |
| Secondary backing             | DESSO EcoBase® * - Contains on average 80% positively defined recycled content | ISO 2424      |
| Pile fibre composition        | BCF Polyamide 6 ECONYL®<br>(ECONYL® is made from 100% regenerated content) **  | ISO 2424      |
| Total thickness               | 6.0 mm   | 0.2 inch      |
| Effective pile thickness      | 3.0 mm   | 0.12 inch     |
| Total mass                    | 4150 g/m²  | 122.2 oz/yd²  |
| Total pile mass               | 675 g/m²   | 19.9 oz/yd²   |
| Effective pile mass           | 430 g/m²   | 12.7 oz/yd²   |
| Pile density                  | 0.143 g/cm³  | 0.0052 lb/in³ |
| Number of tufts               | 1580 /dm²  | 132104 /yd²   |
| Stroll test                   | ≤ 2.0 kV   | ISO 6356      |
| Vertical resistance           | ≤ 1 x 10⁹ Ohm  | ISO 10965     |
| Use classification            | 33 Commercial - heavy use  | ISO 10965     |
| Dimensional stability         | ≤ 0.2 %  | EN 1307       |
| Impact sound reduction ΔLw    | 24 dB  | ISO 10140     |
| Noise reduction               | 0.15 a_w   | ISO 354       |
| Flammability                  | Bfl - s1 (loose laid tested)   | EN 13501-1    |
| Light Reflectance Value (LRV) | See right side page per colour   | BS 8493       |
| Colour Depth (L)              | See right side page per colour   | CIELAB        |

\* DESSO EcoBase® is a polyolefin based backing. Positively defined means: all ingredients have been assessed as either Green (optimal) or Yellow (tolerable) according to the Cradle to Cradle® assessment criteria. As described in Cradle to Cradle® Certified CM Product Standard Version 3.0. The total % of recycled content varies per product and per colour which can be found on our website: [www.tarkett.com](http://www.tarkett.com)

\*\* ECONYL® is a yarn made from 100% regenerated content. The total % of regenerated content varies per product and per colour. Whether a colour contains ECONYL® and the exact % thereof can be found on our website: [www.tarkett.com](http://www.tarkett.com)

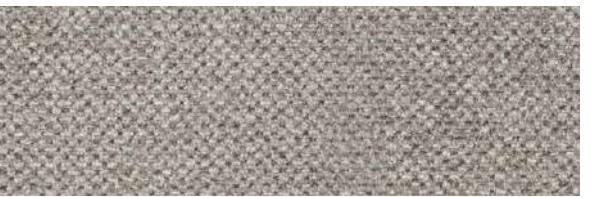With EcoBase™  
backing

1321  
L 60,53 / LRV 28,71



2962  
L 26,42 LRV 4,89



5031  
L 37,37 / LRV 9,74



6324  
L 64,28 / LRV 33,15



7854  
L 52,01 / LRV 20,15



9022  
L 32,58 / LRV 7,35




9027  
L 59,35 / LRV 27,40



9094  
L 36,55 / LRV 9,30



## Solid & Shape – DESSO and Studio Stefan Scholten

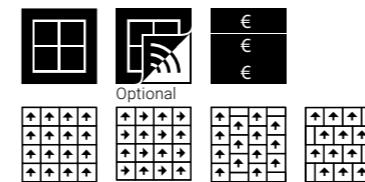



### Preliminary specification according to EN 1307

|                               |  |               |
|-------------------------------|--|---------------|
| Type of manufacture           | Tufted 1/10 "  | ISO 2424      |
| Aspect                        | Structured loop pile   | ISO 2424      |
| Dye method                    | Solution dyed  |               |
| Dimension                     | 50 cm x 50 cm / 19.68" x 19.68"<br>(20 tiles per box)                          | EN ISO 24342  |
| Primary backing               | Polyester fleece   | ISO 2424      |
| Secondary backing             | DESSO EcoBase® * - Contains on average 80% positively defined recycled content | ISO 2424      |
| Pile fibre composition        | BCF Polyamide 6 ECONYL®<br>(ECONYL® is made from 100% regenerated content) **  | ISO 2424      |
| Total thickness               | 6.5 mm   | 0.3 inch      |
| Effective pile thickness      | 3.2 mm   | 0.13 inch     |
| Total mass                    | 4200 g/m²  | 124.0 oz/yd²  |
| Total pile mass               | 740 g/m²   | 21.8 oz/yd²   |
| Effective pile mass           | 470 g/m²   | 13.9 oz/yd²   |
| Pile density                  | 0.147 g/cm³  | 0.0053 lb/in³ |
| Number of tufts               | 1580 /dm²  | 132104 /yd²   |
| Stroll test                   | ≤ 2.0 kV   | ISO 6356      |
| Vertical resistance           | < 1 x 10⁹ Ohm  | ISO 10965     |
| Use classification            | 33 Commercial - heavy use  | ISO 10965     |
| Dimensional stability         | ≤ 0.2 %  | EN 1307       |
| Impact sound reduction ΔLw    | 24 dB  | ISO 10140     |
| Noise reduction               | 0.15 a_w   | ISO 354       |
| Flammability                  | Bfl - s1 (loose laid tested)   | EN 13501-1    |
| Light Reflectance Value (LRV) | See right side page per colour   | BS 8493       |
| Colour Depth (L)              | See right side page per colour   | CIELAB        |

\* DESSO EcoBase® is a polyolefin based backing. Positively defined means: all ingredients have been assessed as either Green (optimal) or Yellow (tolerable) according to the Cradle to Cradle® assessment criteria. As described in Cradle to Cradle® Certified CM Product Standard Version 3.0. The total % of recycled content varies per product and per colour which can be found on our website: [www.tarkett.com](http://www.tarkett.com)

\*\* ECONYL® is a yarn made from 100% regenerated content. The total % of regenerated content varies per product and per colour. Whether a colour contains ECONYL® and the exact % thereof can be found on our website: [www.tarkett.com](http://www.tarkett.com)

With EcoBase™  
backing

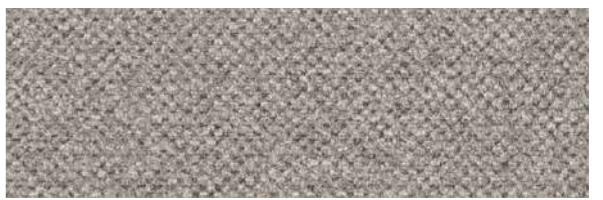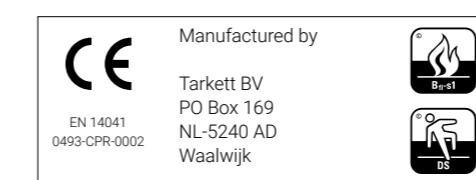


1321  
L 61,29 / LRV 29,57



2962  
L 25,24 LRV 4,49



5031  
L 38,72 / LRV 10,50

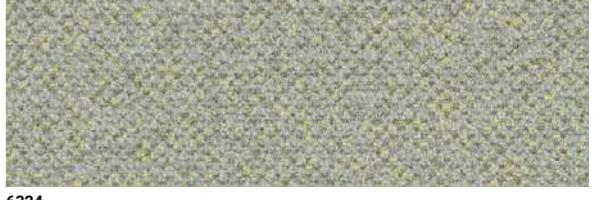


6324  
L 65,42 / LRV 34,58



7854  
L 50,64 / LRV 18,96




9022  
L 35,20 / LRV 8,60

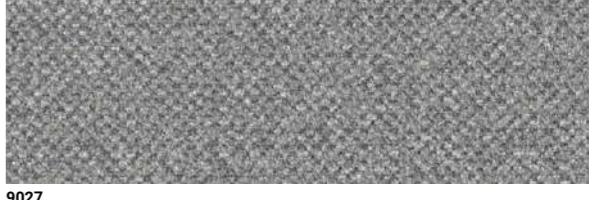

9027  
L 58,26 / LRV 26,24



9094  
L 36,37 / LRV 9,20

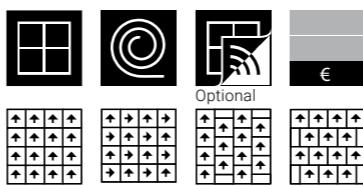

#### Specification according to EN 1307

|                               |  |               |
|-------------------------------|--|---------------|
| Type of manufacture           | Tufted 1/10 "  | ISO 2424      |
| Aspect                        | Loop pile  | ISO 2424      |
| Dye method                    | Solution dyed  |               |
| Dimension                     | 50 cm x 50 cm / 19.68" x 19.68"<br>(20 tiles per box)                          | EN ISO 24342  |
| Primary backing               | Polyester fleece   | ISO 2424      |
| Secondary backing             | DESSO EcoBase® * - Contains on average 80% positively defined recycled content | ISO 2424      |
| Pile fibre composition        | BCF Polyamide 6 ECONYL®<br>(ECONYL® is made from 100% regenerated content) **  | ISO 2424      |
| Total thickness               | 5.5 mm   | 0.2 inch      |
| Effective pile thickness      | 2.5 mm   | 0.10 inch     |
| Total mass                    | 3900 g/m²  | 115.1 oz/yd²  |
| Total pile mass               | 550 g/m²   | 16.2 oz/yd²   |
| Effective pile mass           | 340 g/m²   | 10.0 oz/yd²   |
| Pile density                  | 0.136 g/cm³  | 0.0049 lb/in³ |
| Number of tufts               | 1580 /dm²  | 132104 /yd²   |
| Stroll test                   | ≤ 2.0 kV   | ISO 6356      |
| Use classification            | 33 Commercial - heavy use  | EN 1307       |
| Dimensional stability         | ≤ 0.2 %  | EN 986        |
| Impact sound reduction ΔLw    | 24 dB  | ISO 10140     |
| Noise reduction               | 0.15 a_w   | ISO 354       |
| Flammability                  | B_f - s1 (loose laid tested)   | EN 13501-1    |
| Light Reflectance Value (LRV) | See right side page per colour   | BS 8493       |
| Colour Depth (L)              | See right side page per colour   | CIELAB        |


\* DESSO EcoBase® is a polyolefin based backing. Positively defined means: all ingredients have been assessed as either Green (optimal) or Yellow (tolerable) according to the Cradle to Cradle® assessment criteria. As described in Cradle to Cradle® Certified CM Product Standard Version 3.0. The total % of recycled content varies per product and per colour which can be found on our website: [www.tarkett.com](http://www.tarkett.com)

\*\* ECONYL® is a yarn made from 100% regenerated content. The total % of regenerated content varies per product and per colour. Whether a colour contains ECONYL® and the exact % thereof can be found on our website: [www.tarkett.com](http://www.tarkett.com)

With EcoBase™  
backing




2916 L 55,45 / LRV 23,37    2921 L 26,82 / LRV 5,03    3421 L 20,49 / LRV 3,11

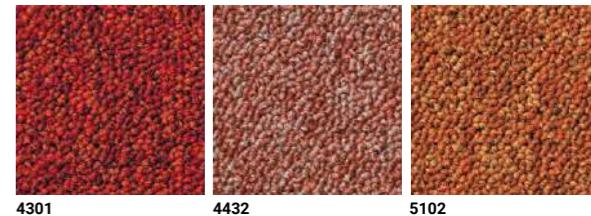


4301 L 29,76 / LRV 6,14    4432 L 41,89 / LRV 12,43    5102 L 39,84 / LRV 11,15




6102 L 55,43 / LRV 23,35    7063 L 46,77 / LRV 15,85    7802 L 33,33 / LRV 7,70

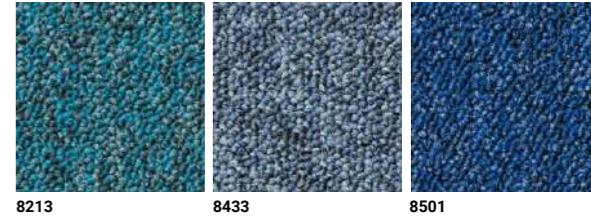


8213 L 40,62 / LRV 11,63    8433 L 43,60 / LRV 13,56    8501 L 29,82 / LRV 6,17

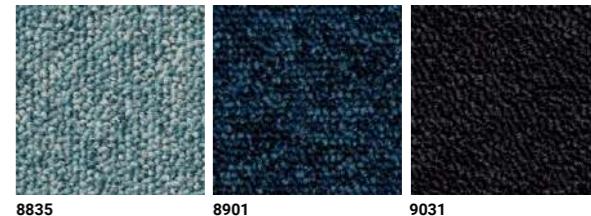


8835 L 50,91 / LRV 19,19    8901 L 22,90 / LRV 3,77    9031 L 17,44 / LRV 2,40

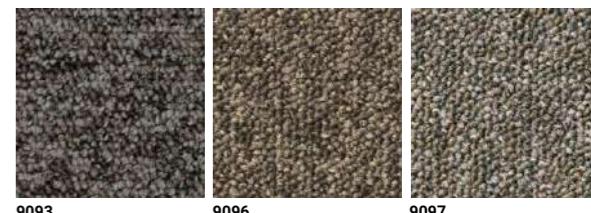

9093 L 36,60 / LRV 9,32    9096 L 38,17 / LRV 10,18    9097 L 46,22 / LRV 15,43

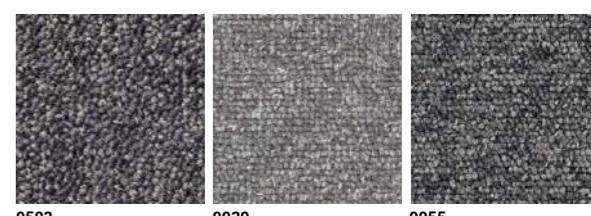


9503 L 37,60 / LRV 9,87    9930 L 54,13 / LRV 22,10    9955 L 44,96 / LRV 14,51

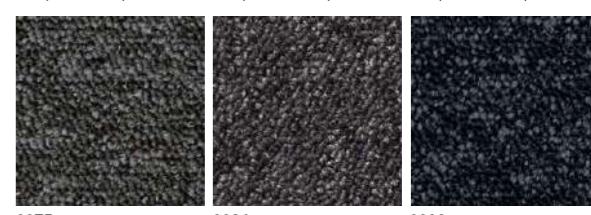

9975 L 31,28 / LRV 6,77    9986 L 28,23 / LRV 5,54    9990 L 22,18 / LRV 3,57

Broadloom available on request




#### Specification according to EN 1307

|                               |  |                |
|-------------------------------|--|----------------|
| Type of manufacture           | Tufted 1/10 "  | ISO 2424       |
| Aspect                        | Loop pile  | ISO 2424       |
| Dye method                    | Solution dyed  |                |
| Dimension                     | 50 cm x 50 cm / 19.68" x 19.68"<br>(20 tiles per box)                          | EN ISO 24342   |
| Primary backing               | Polyester fleece   | ISO 2424       |
| Secondary backing             | DESSO EcoBase® * - Contains on average 80% positively defined recycled content | ISO 2424       |
| Pile fibre composition        | BCF Polyamide 6 ECONYL®<br>(ECONYL® is made from 100% regenerated content) **  | ISO 2424       |
| Total thickness               | 5.5 mm   | 0.2 inch       |
| Effective pile thickness      | 2.5 mm   | 0.10 inch      |
| Total mass                    | 3900 g/m²  | 115.1 oz/yd²   |
| Total pile mass               | 550 g/m²   | 16.2 oz/yd²    |
| Effective pile mass           | 340 g/m²   | 10.0 oz/yd²    |
| Pile density                  | 0.136 g/cm³  | 0.0049/ lb/in³ |
| Number of tufts               | 1580 /dm²  | 132104 /yd²    |
| Stroll test                   | ≤ 2.0 kV   | ISO 6356       |
| Use classification            | 33 Commercial - heavy use  | EN 1307        |
| Dimensional stability         | ≤ 0.2 %  | EN 986         |
| Impact sound reduction ΔLw    | 24 dB  | EN 10140       |
| Noise reduction               | 0.15 aₙ  | ISO 354        |
| Flammability                  | B₂ - s1 (loose laid tested)  | EN 13501-1     |
| Light Reflectance Value (LRV) | See right side page per colour   | BS 8493        |
| Colour Depth (L)              | See right side page per colour   | CIELAB         |

\* DESSO EcoBase® is a polyolefin based backing. Positively defined means: all ingredients have been assessed as either Green (optimal) or Yellow (tolerable) according to the Cradle to Cradle® assessment criteria. As described in Cradle to Cradle® Certified CM Product Standard Version 3.0. The total % of recycled content varies per product and per colour which can be found on our website: [www.tarkett.com](http://www.tarkett.com)

\*\* ECONYL® is a yarn made from 100% regenerated content. The total % of regenerated content varies per product and per colour. Whether a colour contains ECONYL® and the exact % thereof can be found on our website: [www.tarkett.com](http://www.tarkett.com)


With EcoBase™  
backing

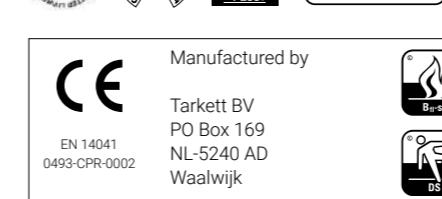

2922  
L 34,63 / LRV 8,65




7021  
L 40,75 / LRV 11,92

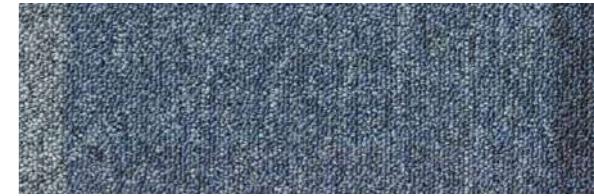

8813  
L 42,60 / LRV 13,22



9107  
L 43,87 / LRV 14,05

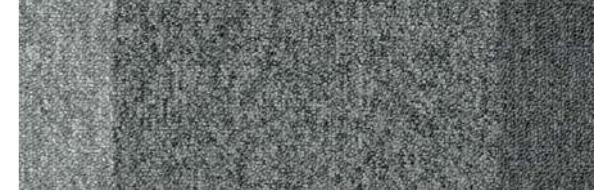


9945  
L 45,71 / LRV 15,42



9980  
L 22,90 / LRV 3,88









Tempra 6018, 6112, 6211

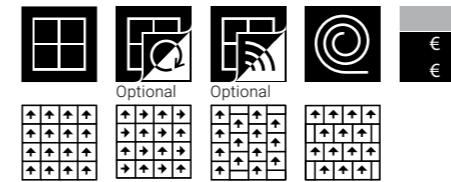



## Specification according to EN 1307

|  |   |              |
|--|---|--------------|
| Type of manufacture                    | Tufted 1/10 "   | ISO 2424     |
| Aspect                                 | Loop pile   | ISO 2424     |
| Dye method                             | Piece dyed continuous                                 |              |
| Dimension                              | 50 cm x 50 cm / 19.68" x 19.68"<br>(20 tiles per box) | EN ISO 24342 |
| Primary backing                        | Polyester fleece                                      | ISO 2424     |
| Secondary backing                      | ProBase - modified bitumen                            | ISO 2424     |
| Pile fibre composition                 | BCF Polyamide 6                                       | ISO 2424     |
| Total thickness                        | 5.5 mm 0.2 inch                                       | ISO 1765     |
| Effective pile thickness               | 2.2 mm 0.09 inch                                      | ISO 1766     |
| Total mass                             | 4000 g/m <sup>2</sup> 118.1 oz/yd <sup>2</sup>        | ISO 8543     |
| Total pile mass                        | 580 g/m <sup>2</sup> 17.1 oz/yd <sup>2</sup>          | ISO 2424     |
| Effective pile mass                    | 360 g/m <sup>2</sup> 10.6 oz/yd <sup>2</sup>          | ISO 8543     |
| Pile density                           | 0.164 g/cm <sup>3</sup> 0.0059 lb/in <sup>3</sup>     | ISO 8543     |
| Number of tufts                        | 1620 / dm <sup>2</sup> 135448/yd <sup>2</sup>         | ISO 1763     |
| Stroll test                            | ≤ 2.0 kV  | ISO 6356     |
| Use classification                     | 33 Commercial - heavy use                             | EN 1307      |
| Dimensional stability                  | ≤ 0.2 %   | EN 986       |
| Impact sound reduction ΔL <sub>w</sub> | 20 dB   | ISO 10140    |
| Noise reduction                        | 0.15 α <sub>w</sub>                                   | ISO 354      |
| Flammability                           | B <sub>f1</sub> - s1 (loose laid tested)              | EN 13501-1   |
| Light Reflectance Value (LRV)          | See right side page per colour                        | BS 8493      |
| Colour Depth (L)                       | See right side page per colour                        | CIELAB       |

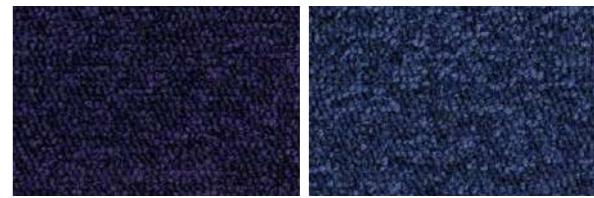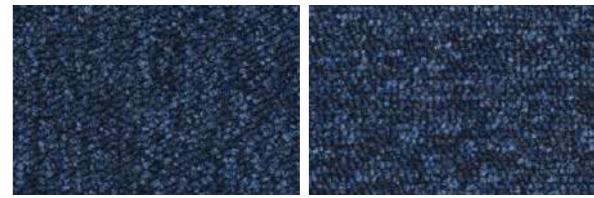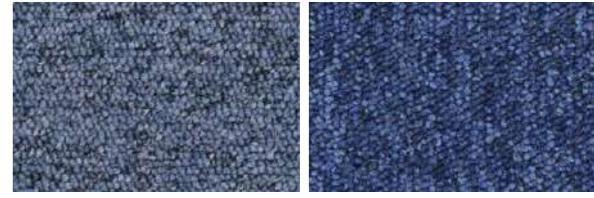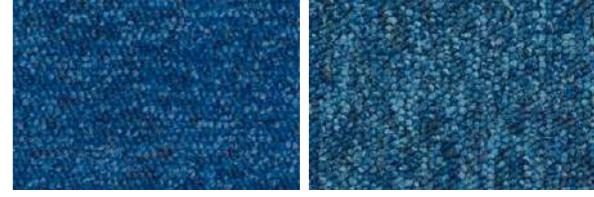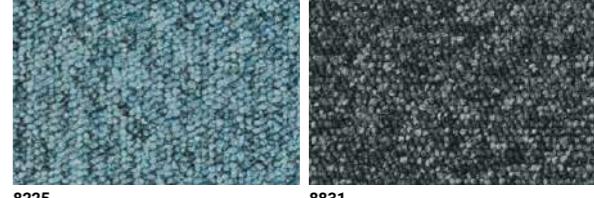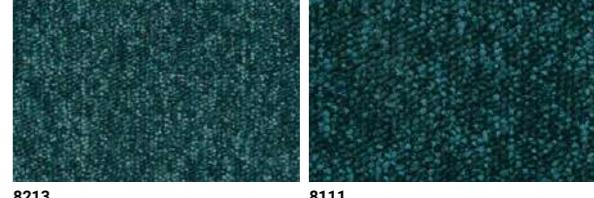With ProBase™  
backing With EcoBase™  
backing3831  
L 18,74 / LRV 2,693007  
L 22,31 / LRV 3,603841  
L 19,94 / LRV 2,978801  
L 26,05 / LRV 4,763021  
L 25,96 / LRV 4,739022  
L 32,01 / LRV 7,098524  
L 40,64 / LRV 11,643013  
L 31,24 / LRV 6,758502  
L 27,64 / LRV 5,328412  
L 31,87 / LRV 7,038225  
L 48,94 / LRV 17,548831  
L 31,37 / LRV 6,818822  
L 32,28 / LRV 7,218212  
L 25,02 / LRV 4,428213  
L 32,06 / LRV 7,118111  
L 25,53 / LRV 4,59

Broadloom available on request

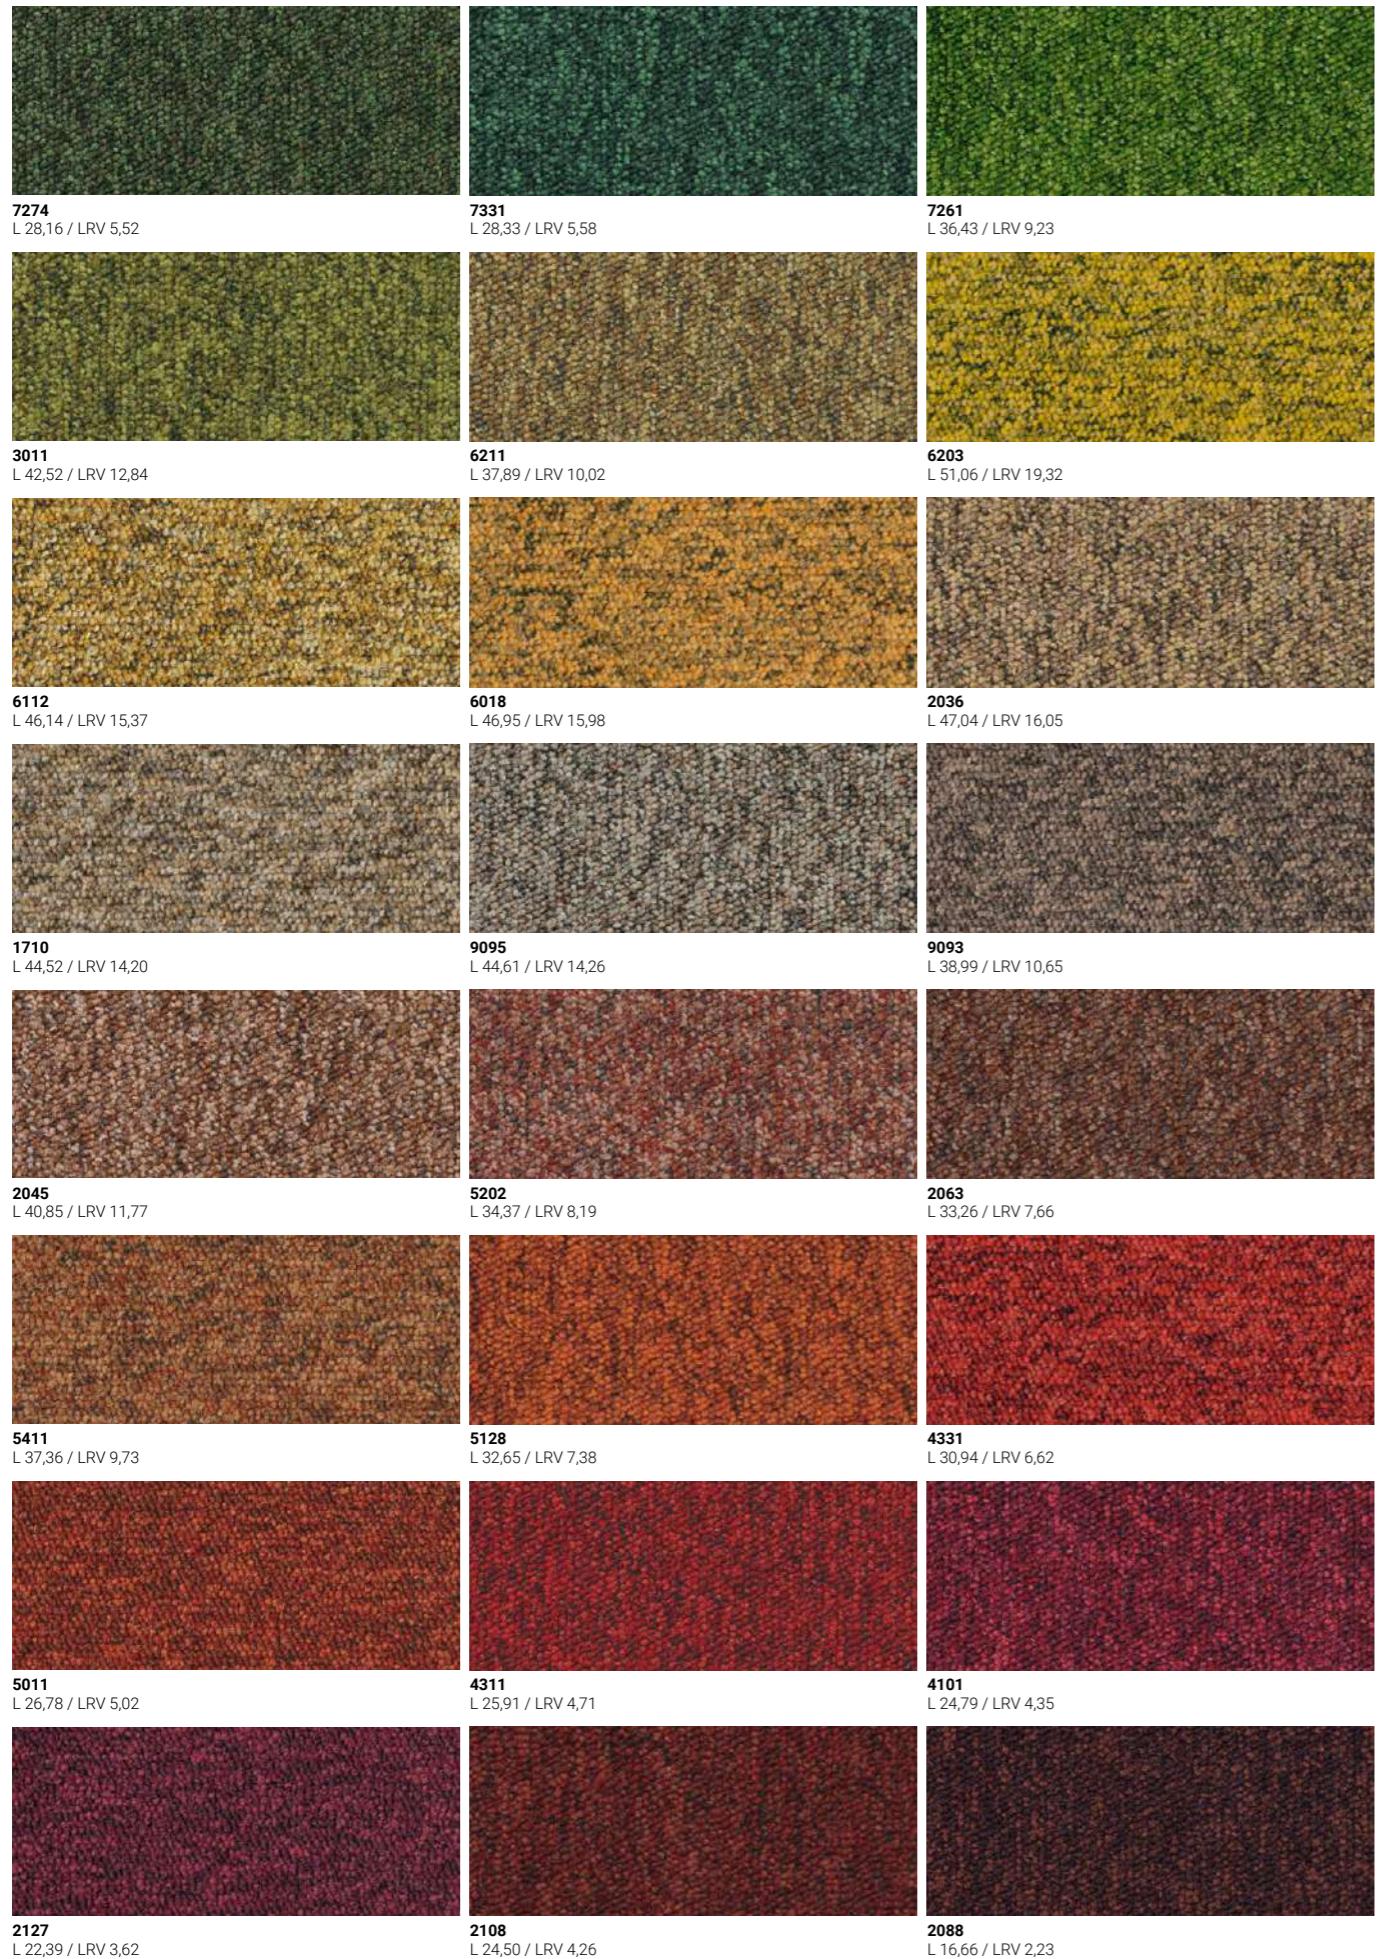

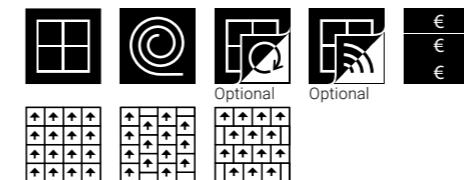


#### Specification according to EN 1307

|  |   |              |
|--|---|--------------|
| Type of manufacture                    | Tufted 1/10 "   | ISO 2424     |
| Aspect                                 | Cut pile  | ISO 2424     |
| Dye method                             | Piece dyed continuous                                 |              |
| Dimension                              | 50 cm x 50 cm / 19.68" x 19.68"<br>(20 tiles per box) | EN ISO 24342 |
| Primary backing                        | Polyester fleece                                      | ISO 2424     |
| Secondary backing                      | ProBase - modified bitumen                            | ISO 2424     |
| Pile fibre composition                 | BCF Polyamide 6.6                                     | ISO 2424     |
| Total thickness                        | 7.0 mm 0.3 inch                                       | ISO 1765     |
| Effective pile thickness               | 4.0 mm 0.16 inch                                      | ISO 1766     |
| Total mass                             | 4150 g/m <sup>2</sup> 122.5 oz/yd <sup>2</sup>        | ISO 8543     |
| Total pile mass                        | 850 g/m <sup>2</sup> 25.1 oz/yd <sup>2</sup>          | ISO 2424     |
| Effective pile mass                    | 650 g/m <sup>2</sup> 19.2 oz/yd <sup>2</sup>          | ISO 8543     |
| Pile density                           | 0.163 g/cm <sup>3</sup> 0.0059 lb/in <sup>3</sup>     | ISO 8543     |
| Number of tufts                        | 1890/dm <sup>2</sup> 158023/yd <sup>2</sup>           | ISO 1763     |
| Stroll test                            | ≤ 2.0 kV  | ISO 6356     |
| Use classification                     | 33 Commercial - heavy use                             | EN 1307      |
| Dimensional stability                  | ≤ 0.2 %   | EN 986       |
| Impact sound reduction ΔL <sub>w</sub> | 23 dB   | ISO 10140    |
| Noise reduction                        | 0.15 α <sub>w</sub>                                   | ISO 354      |
| Flammability                           | B <sub>f1</sub> - s1 (loose laid tested)              | EN 13501-1   |
| Light Reflectance Value (LRV)          | See right side page per colour                        | BS 8493      |
| Colour Depth (L)                       | See right side page per colour                        | CIELAB       |

With ProBase™  
backing



With EcoBase™  
backing

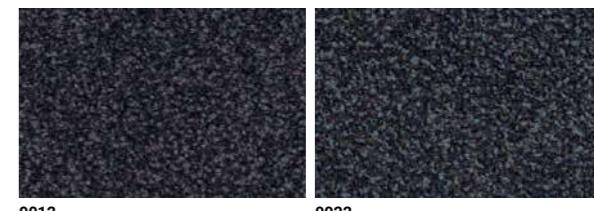


9012  
L 18,88 / LRV 2,72

9022  
L 23,16 / LRV 3,85




8521  
L 22,10 / LRV 3,54

8813  
L 19,45 / LRV 2,85

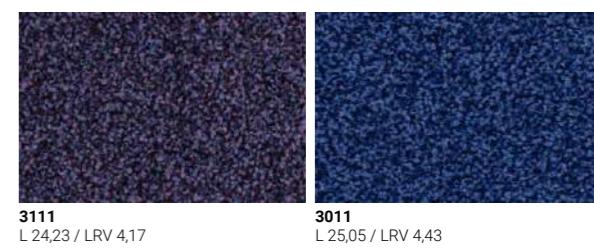


3111  
L 24,23 / LRV 4,17

3011  
L 25,05 / LRV 4,43

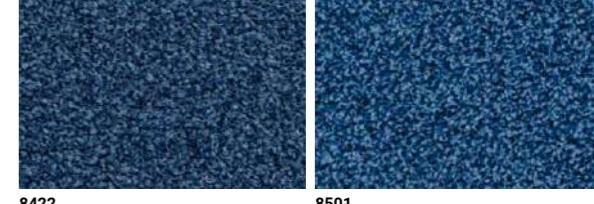


8422  
L 26,43 / LRV 4,89

8501  
L 29,75 / LRV 6,13

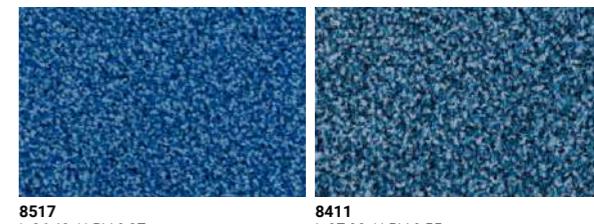


8517  
L 36,49 / LRV 9,27

8411  
L 37,02 / LRV 9,55

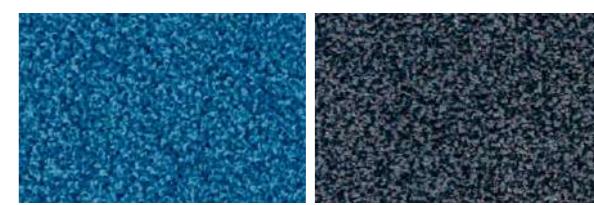


8412  
L 37,37 / LRV 9,74

8903  
L 26,60 / LRV 4,95

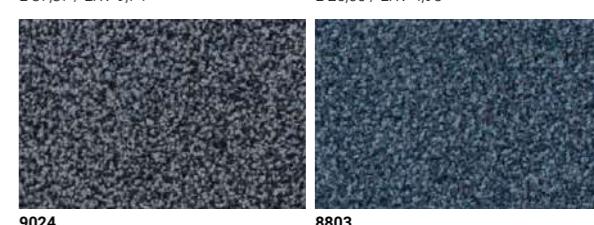

9024  
L 33,25 / LRV 7,65


8803  
L 32,12 / LRV 7,14

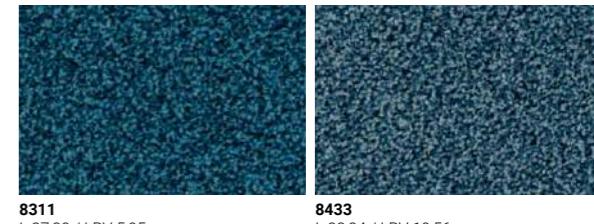

8311  
L 27,30 / LRV 5,95

8433  
L 38,84 / LRV 10,56





#### Preliminary specification according to EN 1307

|                               |  |               |
|-------------------------------|--|---------------|
| Type of manufacture           | Tufted 1/10 "  | ISO 2424      |
| Aspect                        | Structured loop pile   | ISO 2424      |
| Dye method                    | Solution dyed  |               |
| Dimension                     | 100 cm x 25cm / 39.36" x 9.84"<br>(16 planks per box)                          | EN ISO 24342  |
| Primary backing               | Polyester fleece   | ISO 2424      |
| Secondary backing             | DESSO EcoBase® * - Contains on average 80% positively defined recycled content | ISO 2424      |
| Pile fibre composition        | BCF Polyamide 6 ECONYL®<br>(ECONYL® is made from 100% regenerated content) **  | ISO 2424      |
| Total thickness               | 7.0 mm   | 0.3 inch      |
| Effective pile thickness      | 4.6 mm   | 0.18 inch     |
| Total mass                    | 4200 g/m²  | 124.0 oz/yd²  |
| Total pile mass               | 675 g/m²   | 19.9 oz/yd²   |
| Effective pile mass           | 565 g/m²   | 16.7 oz/yd²   |
| Pile density                  | 0.123 g/cm³  | 0.0044 lb/in³ |
| Number of tufts               | 2130 /dm²  | 178089 /yd²   |
| Stroll test                   | ≤ 2.0 kV   | ISO 6356      |
| Use classification            | 33 Commercial - heavy use  | EN 1307       |
| Dimensional stability         | ≤ 0.2 %  | EN 986        |
| Impact sound reduction ΔLw    | 25 dB  | ISO 10140     |
| Noise reduction               | 0.20 αw  | ISO 354       |
| Flammability                  | Bfl - s1 (loose laid tested)   | EN 13501-1    |
| Light Reflectance Value (LRV) | See right side page per colour   | BS 8493       |
| Colour Depth (L)              | See right side page per colour   | CIELAB        |

\* DESSO EcoBase® is a polyolefin based backing. Positively defined means: all ingredients have been assessed as either Green (optimal) or Yellow (tolerable) according to the Cradle to Cradle® assessment criteria. As described in Cradle to Cradle® Certified CM Product Standard Version 3.0. The total % of recycled content varies per product and per colour which can be found on our website: [www.tarkett.com](http://www.tarkett.com)

\*\* ECONYL® is a yarn made from 100% regenerated content. The total % of regenerated content varies per product and per colour. Whether a colour contains ECONYL® and the exact % thereof can be found on our website: [www.tarkett.com](http://www.tarkett.com)

With EcoBase™  
backing



4207 L 29,18 / LRV 5,91  
4405 L 40,21 / LRV 11,38



4437 L 43,43 / LRV 13,45  
6214 L 56,37 / LRV 24,29



7175 L 51,54 / LRV 19,74  
7862 L 38,53 / LRV 10,39



8423 L 32,39 / LRV 7,26  
8811 L 21,61 / LRV 3,41




9032 L 21,69 / LRV 3,43  
9035 L 45,28 / LRV 14,75




9096 L 50,22 / LRV 18,60  
9502 L 29,49 / LRV 6,03



9517 L 54,49 / LRV 22,43  
9524 L 39,93 / LRV 11,21

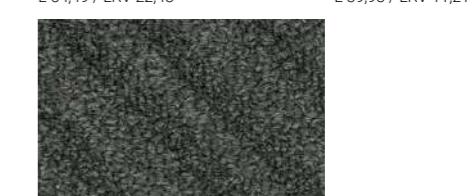

9532 L 29,07 / LRV 5,86




#### Specification according to EN 1307

|                               |  |               |
|-------------------------------|--|---------------|
| Type of manufacture           | Tufted 1/10 "  | ISO 2424      |
| Aspect                        | Compactuft loop pile   | ISO 2424      |
| Dye method                    | Solution dyed  |               |
| Dimension                     | 50 cm x 50 cm / 19.68" x 19.68"<br>(20 tiles per box)                          | EN ISO 24342  |
| Primary backing               | Polyester fleece   | ISO 2424      |
| Secondary backing             | DESSO EcoBase® * - Contains on average 80% positively defined recycled content | ISO 2424      |
| Pile fibre composition        | BCF Polyamide 6  | ISO 2424      |
| Total thickness               | 5.5 mm   | 0.2 inch      |
| Effective pile thickness      | 0.7 mm   | 0.03 inch     |
| Total mass                    | 3950 g/m²  | 116.6 oz/yd²  |
| Total pile mass               | 450 g/m²   | 13.3 oz/yd²   |
| Effective pile mass           | 120 g/m²   | 3.5 oz/yd²    |
| Pile density                  | 0.171 g/cm³  | 0.0062 lb/in³ |
| Number of tufts               | 1380 /dm²  | 115382 /yd²   |
| Stroll test                   | ≤ 2.0 kV   | ISO 6356      |
| Vertical resistance           | ≤ 1 x 10⁹ Ohm  | ISO 10965     |
| Use classification            | 33 Commercial - heavy use  | EN 1307       |
| Dimensional stability         | ≤ 0.2 %  | EN 986        |
| Impact sound reduction ΔLw    | 18 dB  | ISO 10140     |
| Noise reduction               | 0.15 a <sub>w</sub>  | ISO 354       |
| Flammability                  | B <sub>r1</sub> - s1 (loose laid tested)                                       | EN 13501-1    |
| Light Reflectance Value (LRV) | See right side page per colour   | BS 8493       |
| Colour Depth (L)              | See right side page per colour   | CIELAB        |


\* DESSO EcoBase® is a polyolefin based backing. Positively defined means: all ingredients have been assessed as either Green (optimal) or Yellow (tolerable) according to the Cradle to Cradle® assessment criteria. As described in Cradle to Cradle® Certified CM Product Standard Version 3.0. The total % of recycled content varies per product and per colour which can be found on our website: [www.tarkett.com](http://www.tarkett.com)

With EcoBase™  
backing

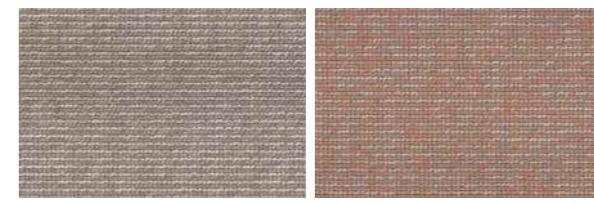


1320  
L 58,10 / LRV 26,07

1708  
L 54,33 / LRV 22,28

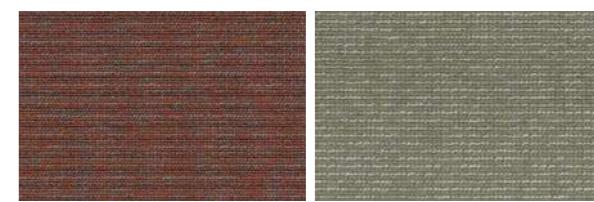


4423  
L 36,18 / LRV 9,10

7926  
L 53,32 / LRV 21,34

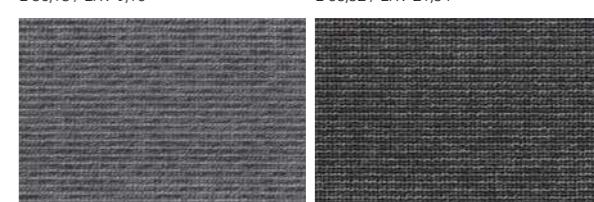

9024  
L 45,65 / LRV 15,01

9025  
L 37,58 / LRV 9,85

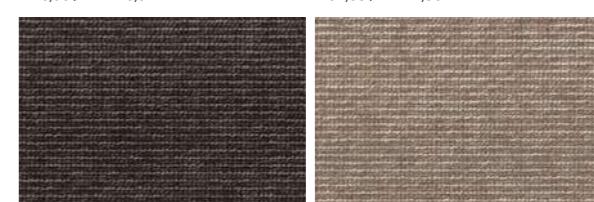


9092  
L 31,17 / LRV 6,72

9095  
L 51,24 / LRV 19,48



9500  
L 28,41 / LRV 5,61

9531  
L 24,41 / LRV 4,23

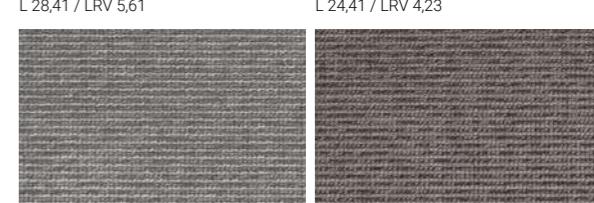

9944  
L 54,49 / LRV 22,44

9964  
L 46,33 / LRV 15,52

# Broadloom & Rugs





|                 |     |                   |     |                 |     |
|-----------------|-----|-------------------|-----|-----------------|-----|
| Asteranne       | 179 | DESSO & Ex Nature | 193 | Sense of Marble | 205 |
| Denim Regular   | 183 | Essence           | 195 | Shades          | 207 |
| Denim Stonewash | 185 | Flagstone         | 197 | Torso           | 209 |
| Denim Twill     | 187 | Futurity Rug      | 199 | Vintage         | 211 |
| Denim Worn      | 189 | Palatino          | 201 |                 |     |
| DESSO &Ex       | 191 | Patterns          | 203 |                 |     |



#### Specification according to EN 1307

|  |  |                           |
|--|--|---------------------------|
| Type of manufacture                    | Tufted 1/10 "                            | ISO 2424                  |
| Aspect                                 | Cut pile                                 | ISO 2424                  |
| Dye method                             | Piece dyed                               |                           |
| Width                                  | 400 cm / 13' 1,5"                        |                           |
| Primary backing                        | Polypropylene woven + fleece             | ISO 2424                  |
| Secondary backing                      | Polypropylene woven                      | ISO 2424                  |
| Pile fibre composition                 | BCF Polyamide 6.6                        | ISO 2424                  |
| Total thickness                        | 9.5 mm                                   | 0.4 inch                  |
| Effective pile thickness               | 7.3 mm                                   | 0.29 inch                 |
| Total mass                             | 2290 g/m <sup>2</sup>                    | 67.6 oz/yd <sup>2</sup>   |
| Total pile mass                        | 1170 g/m <sup>2</sup>                    | 34.5 oz/yd <sup>2</sup>   |
| Effective pile mass                    | 885 g/m <sup>2</sup>                     | 26.1 oz/yd <sup>2</sup>   |
| Pile density                           | 0.121 g/cm <sup>3</sup>                  | 0.0044 lb/in <sup>3</sup> |
| Number of tufts                        | 1850 /dm <sup>2</sup>                    | 154679 /yd <sup>2</sup>   |
| Stroll test                            | ≤ 2.0 kV                                 | ISO 6356                  |
| Use classification                     | 32 Commercial - general use              | EN 1307                   |
| Impact sound reduction ΔL <sub>w</sub> | 28 dB                                    | ISO 10140                 |
| Noise reduction                        | 0.25 α <sub>w</sub>                      | ISO 354                   |
| Flammability                           | B <sub>f1</sub> - s1 (loose laid tested) | EN 13501-1                |

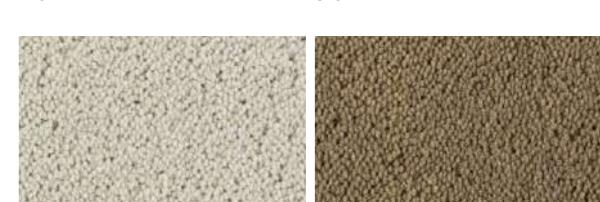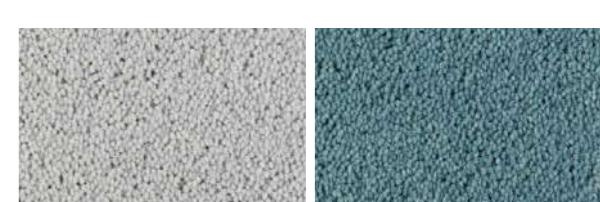





Worn Denim Light 141-132



## Preliminary specification according to EN 14215

|                        |   |             |
|------------------------|---|-------------|
| Type of manufacture    | Tufted 1/10 "   | ISO 2424    |
| Aspect                 | Structured loop pile  | ISO 2424    |
| Dye method             | Space dyed  |             |
| Dimension              | Different dimensions in length x max. 400 cm in width                       |             |
| Primary backing        | Polyester fleece  | ISO 2424    |
| Secondary backing      | Felt backing 250g   | ISO 2424    |
| Pile fibre composition | BCF Polyamide 6 ECONYL®<br>(ECONYL® is made from 100% regenerated content)* | ISO 2424    |
| Total thickness        | 9 mm  | 0.4 inch    |
| Total mass             | 2430 g/m²   | 71.7 oz/yd² |
| Total pile mass        | 960 g/m²  | 28.3 oz/yd² |
|                        |   | ISO 1765    |
|                        |   | ISO 8543    |
|                        |   | ISO 2424    |

\* ECONYL® is a yarn made from 100% regenerated content. The total % of regenerated content varies per product and per colour. Whether a colour contains ECONYL® and the exact % thereof can be found on our website: [www.tarkett.com](http://www.tarkett.com)



242-130 Regular



Manufactured by  
Tarkett BV  
PO Box 169  
NL-5240 AD  
Waalwijk  
EN 14041  
0493-CPR-0003





Denim Stonewash Light 141-133



## Preliminary specification according to EN 14215

|                        |   |             |
|------------------------|---|-------------|
| Type of manufacture    | Tufted 1/10 "   | ISO 2424    |
| Aspect                 | Structured loop pile  | ISO 2424    |
| Dye method             | Space dyed  |             |
| Dimension              | Different dimensions in length x max. 400 cm in width                       |             |
| Primary backing        | Polyester fleece  | ISO 2424    |
| Secondary backing      | Felt backing 250g   | ISO 2424    |
| Pile fibre composition | BCF Polyamide 6 ECONYL®<br>(ECONYL® is made from 100% regenerated content)* | ISO 2424    |
| Total thickness        | 8.9 mm  | 0.4 inch    |
| Total mass             | 2510 g/m²   | 74.1 oz/yd² |
| Total pile mass        | 850 g/m²  | 25.1 oz/yd² |
|                        |   | ISO 1765    |
|                        |   | ISO 8543    |
|                        |   | ISO 2424    |

\* ECONYL® is a yarn made from 100% regenerated content. The total % of regenerated content varies per product and per colour. Whether a colour contains ECONYL® and the exact % thereof can be found on our website: [www.tarkett.com](http://www.tarkett.com)



141-133 Stonewash Light



242-133 Stonewash Dark



Manufactured by  
Tarkett BV  
PO Box 169  
NL-5240 AD  
Waalwijk  
EN 14041  
0493-CPR-0003





Denim Twill Dark 242-131 / Rug



## Preliminary specification according to EN 14215

|                        |   |             |
|------------------------|---|-------------|
| Type of manufacture    | Tufted 1/10 "   | ISO 2424    |
| Aspect                 | Structured loop pile  | ISO 2424    |
| Dye method             | Space dyed  |             |
| Dimension              | Different dimensions in length x max. 400 cm in width                       |             |
| Primary backing        | Polyester fleece  | ISO 2424    |
| Secondary backing      | Felt backing 250g   | ISO 2424    |
| Pile fibre composition | BCF Polyamide 6 ECONYL®<br>(ECONYL® is made from 100% regenerated content)* | ISO 2424    |
| Total thickness        | 9.3 mm  | 0.4 inch    |
| Total mass             | 2505 g/m²   | 73.9 oz/yd² |
| Total pile mass        | 870 g/m²  | 25.7 oz/yd² |
|                        |   | ISO 1765    |
|                        |   | ISO 8543    |
|                        |   | ISO 2424    |

\* ECONYL® is a yarn made from 100% regenerated content. The total % of regenerated content varies per product and per colour. Whether a colour contains ECONYL® and the exact % thereof can be found on our website: [www.tarkett.com](http://www.tarkett.com)



141-131 Twill Light




242-131 Twill Dark



Manufactured by  
Tarkett BV  
PO Box 169  
NL-5240 AD  
Waalwijk  
EN 14041  
0493-CPR-0003



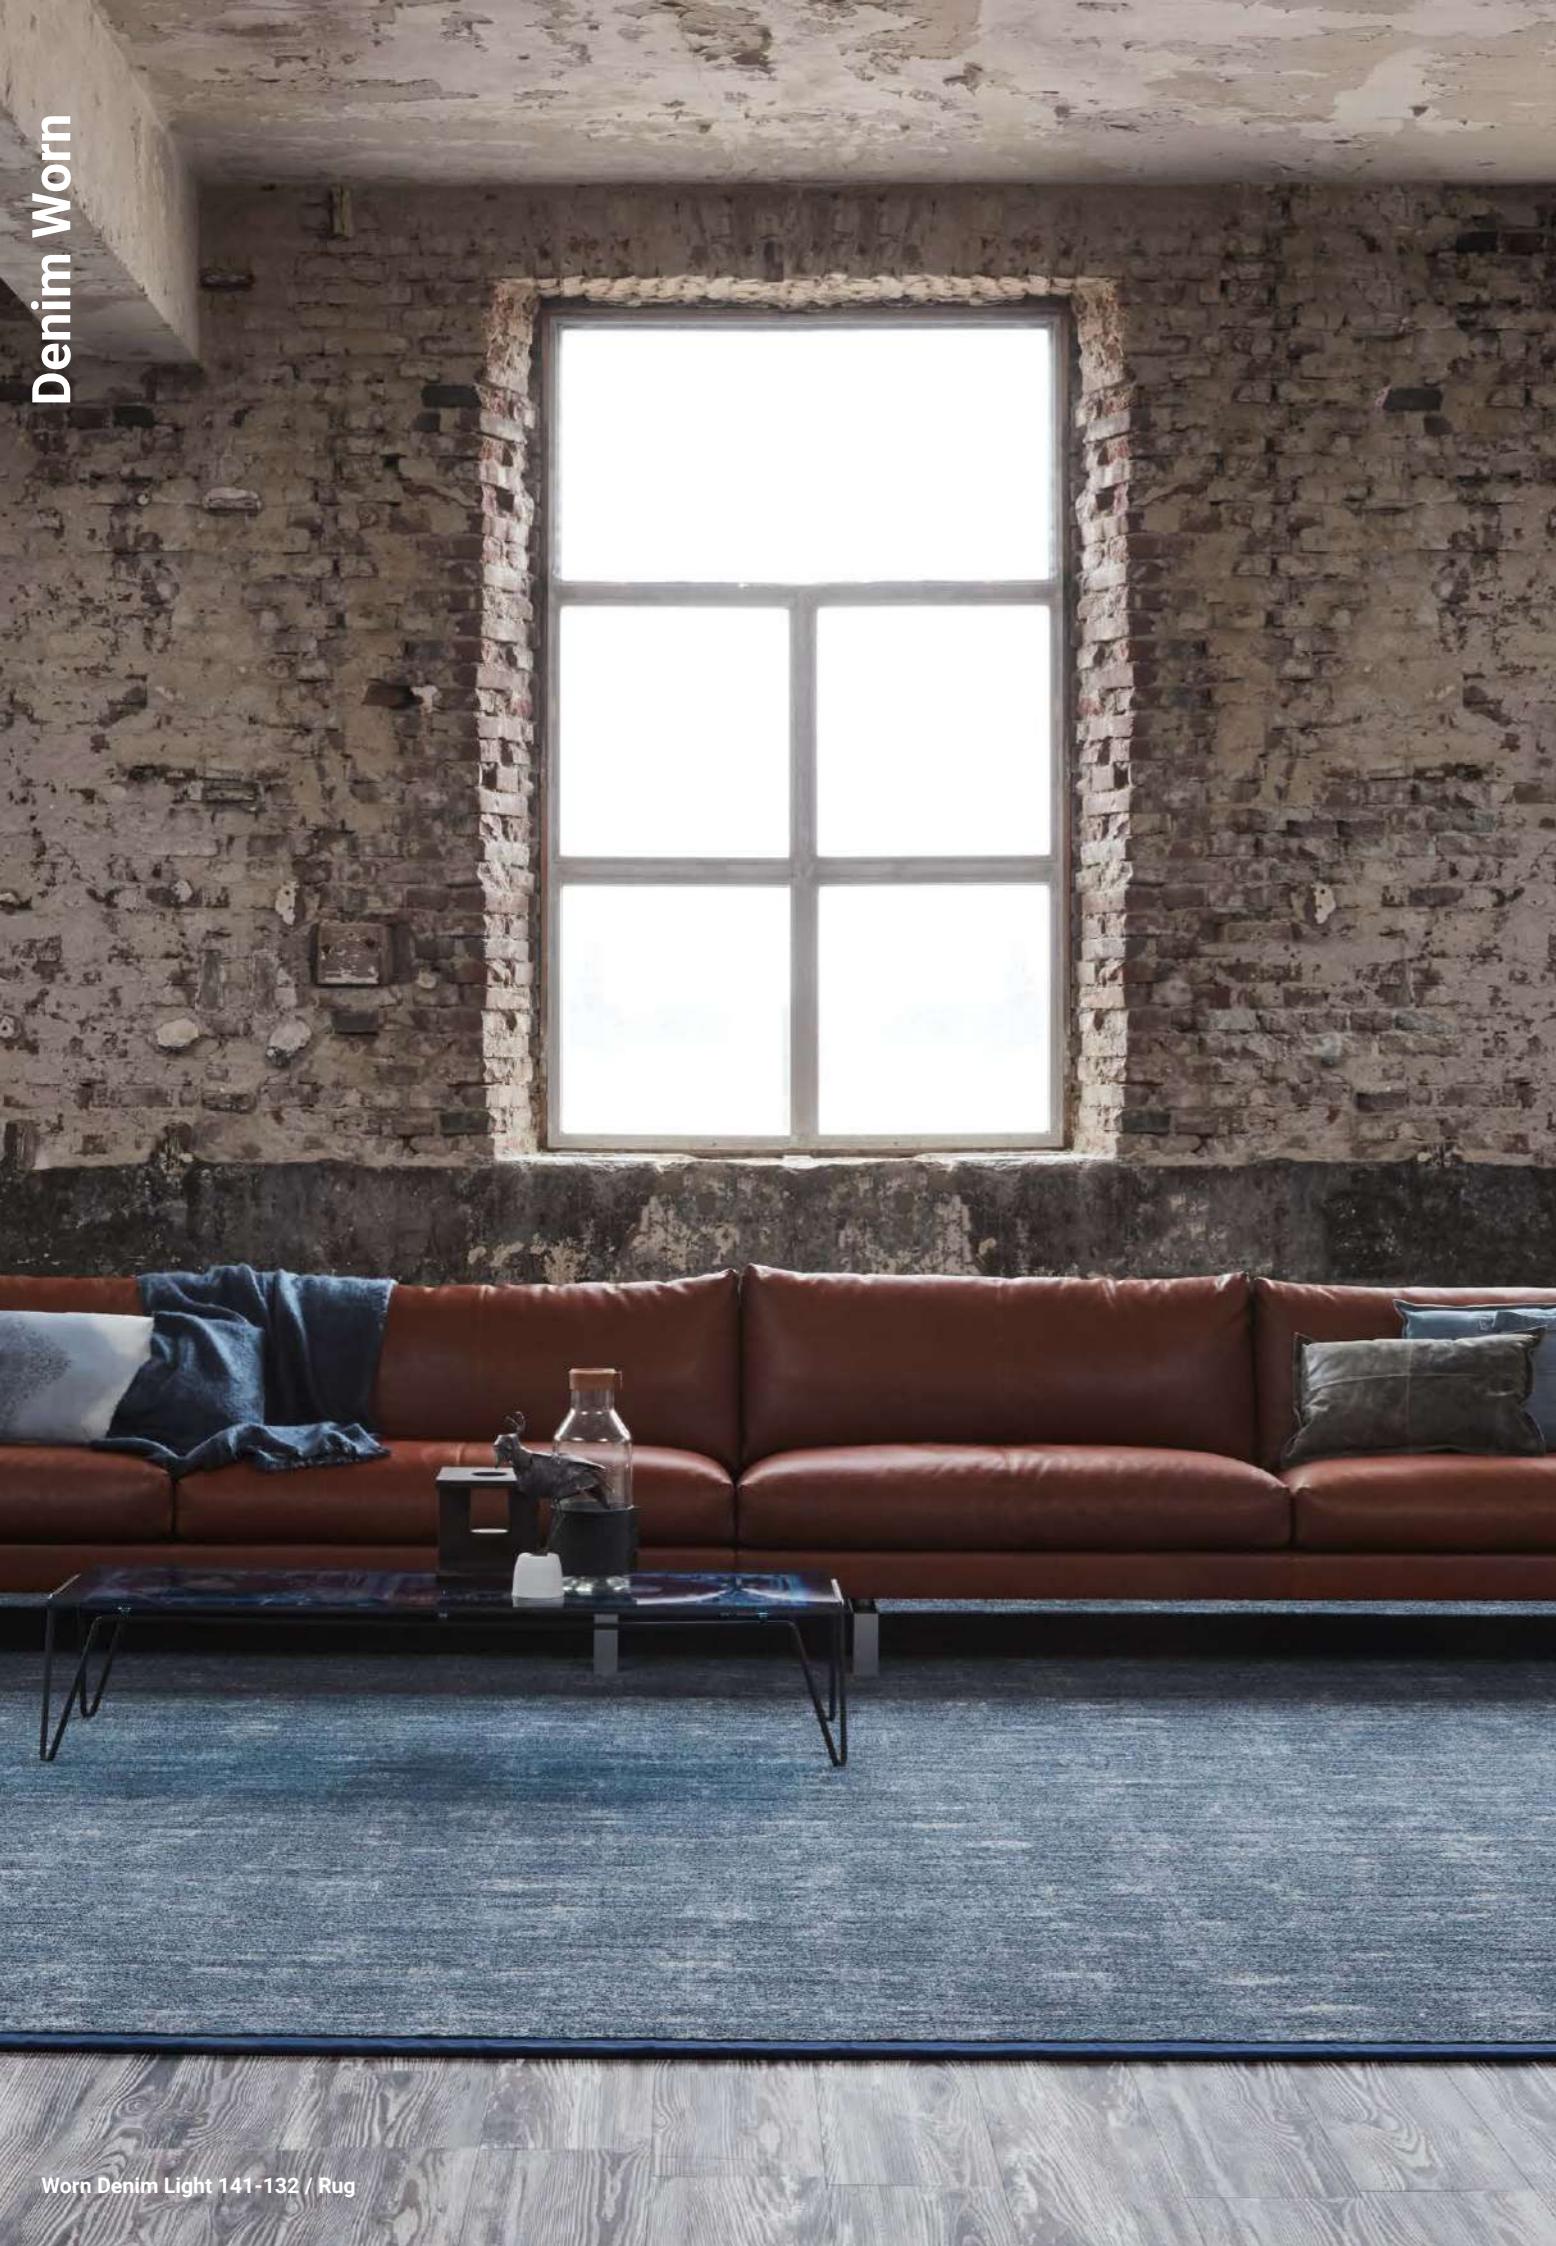


Worn Denim Light 141-132 / Rug



## Specification according to EN 14215

|                        |   |             |
|------------------------|---|-------------|
| Type of manufacture    | Tufted 1/10 "   | ISO 2424    |
| Aspect                 | Structured loop pile  | ISO 2424    |
| Dye method             | Space dyed  |             |
| Dimension              | Different dimensions in length x max. 400 cm in width                       |             |
| Primary backing        | Polyester fleece  | ISO 2424    |
| Secondary backing      | Felt backing 250g   | ISO 2424    |
| Pile fibre composition | BCF Polyamide 6 ECONYL®<br>(ECONYL® is made from 100% regenerated content)* | ISO 2424    |
| Total thickness        | 8 mm  | 0.3 inch    |
| Total mass             | 2320 g/m²   | 68.5 oz/yd² |
| Total pile mass        | 815 g/m²  | 24.1 oz/yd² |
|                        |   | ISO 1765    |
|                        |   | ISO 8543    |
|                        |   | ISO 2424    |

\* ECONYL® is a yarn made from 100% regenerated content. The total % of regenerated content varies per product and per colour. Whether a colour contains ECONYL® and the exact % thereof can be found on our website: [www.tarkett.com](http://www.tarkett.com)

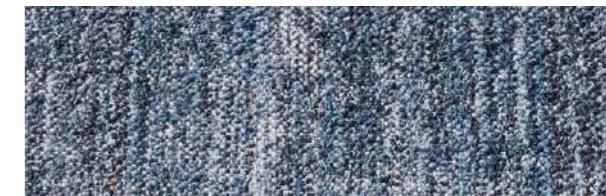

141-132 Worn Denim Light



242-132 Worn Denim Dark

**ECONYL®**  
ENDLESS POSSIBILITIES

 Quality-and Environmental  
Management System Certification  
ISO 9001 & ISO 14001

 Manufactured by  
Tarkett BV  
PO Box 169  
NL-5240 AD  
Waalwijk  
EN 14041  
0493-CPR-0003








#### Preliminary specification according to EN 14215

|  |   |            |
|--|---|------------|
| Type of manufacture                    | Tufted 1/10 "                                     | ISO 2424   |
| Aspect                                 | Cut pile  | ISO 2424   |
| Dye method                             | Print   |            |
| Width                                  | 400 cm / 13' 1"                                   |            |
| Primary backing                        | Polyester - polyamide fleece                      | ISO 2424   |
| Secondary backing                      | Polypropylene woven                               | ISO 2424   |
| Pile fibre composition                 | BCF Polyamide 6                                   | ISO 2424   |
| Total thickness                        | 6.5 mm 0.3 inch                                   | ISO 1765   |
| Effective pile thickness               | 4.3 mm 0.17 inch                                  | ISO 1766   |
| Total mass                             | 1930 g/m <sup>2</sup> 57.0 oz/yd <sup>2</sup>     | ISO 8543   |
| Total pile mass                        | 980 g/m <sup>2</sup> 28.9 oz/yd <sup>2</sup>      | ISO 2424   |
| Effective pile mass                    | 590 g/m <sup>2</sup> 17.4 oz/yd <sup>2</sup>      | ISO 8543   |
| Pile density                           | 0.137 g/cm <sup>3</sup> 0.0050 lb/in <sup>3</sup> | ISO 8543   |
| Number of tufts                        | 1735/dm <sup>2</sup> 145063 /yd <sup>2</sup>      | ISO 1763   |
| Stroll test                            | ≤ 2.0 kV  | ISO 6356   |
| Use classification                     | 33 Commercial - heavy use                         | EN 1307    |
| Impact sound reduction ΔL <sub>w</sub> | 25 dB   | ISO 10140  |
| Noise reduction                        | 0.20 α <sub>w</sub>                               | ISO 354    |
| Flammability                           | C <sub>fl</sub> - s1 (glued tested)               | EN 13501-1 |



Manufactured by  
Tarkett BV  
PO Box 169  
NL-5240 AD  
Waalwijk  
EN 14041  
1658-CPR-3146


Use classification  
may vary with  
specific colours  
and/or designs

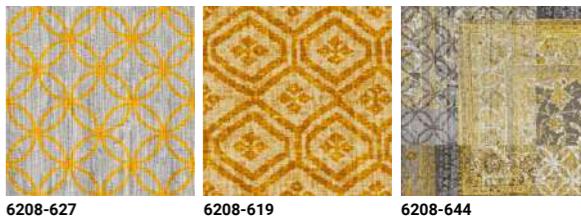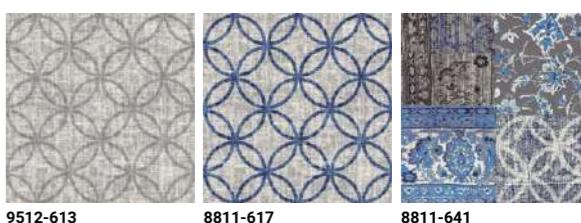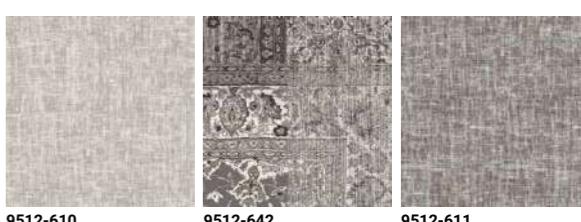



#### Preliminary specification according to EN 14215


|  |                                     |                           |            |
|--|-------------------------------------|---------------------------|------------|
| Type of manufacture                    | Tufted 1/10 "                       | ISO 2424                  |            |
| Aspect                                 | Cut pile                            | ISO 2424                  |            |
| Dye method                             | Print                               |                           |            |
| Width                                  | 400 cm / 13' 1"                     |                           |            |
| Primary backing                        | Polyester - polyamide fleece        | ISO 2424                  |            |
| Secondary backing                      | Polypropylene woven                 | ISO 2424                  |            |
| Pile fibre composition                 | BCF Polyamide 6                     | ISO 2424                  |            |
| Total thickness                        | 6.5 mm                              | 0.3 inch                  | ISO 1765   |
| Effective pile thickness               | 4.3 mm                              | 0.17 inch                 | ISO 1766   |
| Total mass                             | 1930 g/m <sup>2</sup>               | 57.0 oz/yd <sup>2</sup>   | ISO 8543   |
| Total pile mass                        | 980 g/m <sup>2</sup>                | 28.9 oz/yd <sup>2</sup>   | ISO 2424   |
| Effective pile mass                    | 590 g/m <sup>2</sup>                | 17.4 oz/yd <sup>2</sup>   | ISO 8543   |
| Pile density                           | 0.137 g/cm <sup>3</sup>             | 0.0050 lb/in <sup>3</sup> | ISO 8543   |
| Number of tufts                        | 1735/dm <sup>2</sup>                | 145063 /yd <sup>2</sup>   | ISO 1763   |
| Stroll test                            | ≤ 2.0 kV                            |                           | ISO 6356   |
| Use classification                     | 33 Commercial - heavy use           |                           | EN 1307    |
| Impact sound reduction ΔL <sub>w</sub> | 25 dB                               |                           | ISO 10140  |
| Noise reduction                        | 0.20 a <sub>w</sub>                 |                           | ISO 354    |
| Flammability                           | C <sub>fl</sub> - s1 (glued tested) |                           | EN 13501-1 |

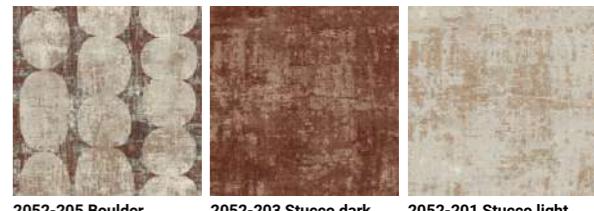

2052-205 Boulder    2052-203 Stucco dark    2052-201 Stucco light




2052-202 Travertine

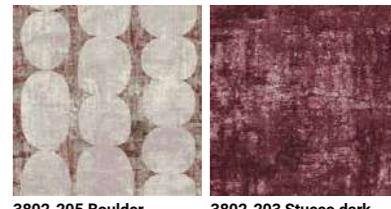

3802-205 Boulder    3802-203 Stucco dark




6002-206 Boulder    6002-201 Stucco light

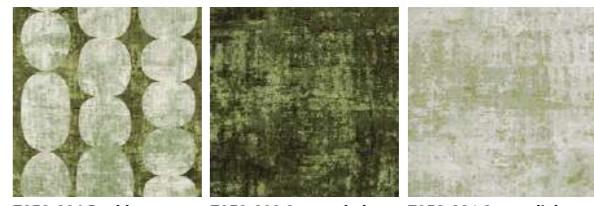

7852-206 Boulder    7852-203 Stucco dark    7852-201 Stucco light



8802-205 Boulder    8802-203 Stucco dark



9980-205 Boulder    9980-204 Stucco dark    9980-201 Stucco light



9980-202 Travertine



Manufactured by  
Tarkett BV  
PO Box 169  
NL-5240 AD  
Waalwijk  
EN 14041  
1658-CPR-3146




Use classification  
may vary with  
specific colours  
and/or designs



#### Preliminary specification according to EN 1307

|  |   |            |
|--|---|------------|
| Type of manufacture                    | Tufted 1/10 "                                     | ISO 2424   |
| Aspect                                 | Loop pile   | ISO 2424   |
| Dye method                             | Solution dyed                                     |            |
| Width                                  | 400 cm / 13' 1"                                   |            |
| Primary backing                        | Polypropylene woven + fleece                      | ISO 2424   |
| Secondary backing                      | Polypropylene woven                               | ISO 2424   |
| Pile fibre composition                 | BCF Polyamide 6                                   | ISO 2424   |
| Total thickness                        | 6.6 mm 0.3 inch                                   | ISO 1765   |
| Effective pile thickness               | 3.2 mm 0.13 inch                                  | ISO 1766   |
| Total mass                             | 2140 g/m <sup>2</sup> 63.2 oz/yd <sup>2</sup>     | ISO 8543   |
| Total pile mass                        | 550 g/m <sup>2</sup> 16.2 oz/yd <sup>2</sup>      | ISO 2424   |
| Effective pile mass                    | 310 g/m <sup>2</sup> 9.1 oz/yd <sup>2</sup>       | ISO 8543   |
| Pile density                           | 0.097 g/cm <sup>3</sup> 0.0035 lb/in <sup>3</sup> | ISO 8543   |
| Number of tufts                        | 1580 /dm <sup>2</sup> 132104 /yd <sup>2</sup>     | ISO 1763   |
| Stroll test                            | ≤ 2.0 kV  | ISO 6356   |
| Use classification                     | 33 Commercial - heavy use                         | EN 1307    |
| Impact sound reduction ΔL <sub>w</sub> | 28 dB   | ISO 10140  |
| Noise reduction                        | 0.20 a <sub>w</sub>                               | ISO 354    |
| Flammability                           | B <sub>f</sub> - s1 (glued tested)                | EN 13501-1 |
| Light Reflectance Value (LRV)          | See right side page per colour                    | BS 8493    |
| Colour Depth (L)                       | See right side page per colour                    | CIELAB     |

\* Also available in carpet tile in different colours

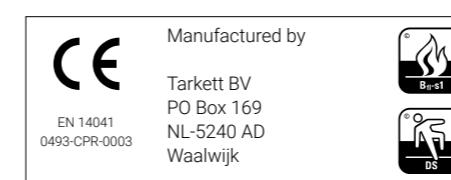


8802  
L 28,96 / LRV 5,82



9501  
L 24,98 / LRV 4,41



9990  
L 17,02 / LRV 2,31

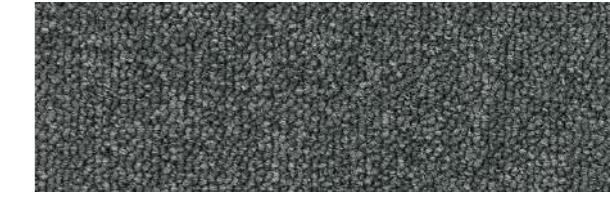

9503  
L 38,32 / LRV 10,27



9094  
L 38,03 / LRV 10,10



2051  
L 34,10 / LRV 8,06



2924  
L 49,59 / LRV 18,08

Also available in carpet tile in 31 different colours





#### Preliminary specification according to EN 1307

|  |                                     |                           |
|--|-------------------------------------|---------------------------|
| Type of manufacture                    | Tufted 1/10 "                       | ISO 2424                  |
| Aspect                                 | Structured loop + cut pile          | ISO 2424                  |
| Dye method                             | Piece dyed continuous               |                           |
| Width                                  | 400 cm / 13' 1"                     |                           |
| Primary backing                        | Polypropylene woven + fleece        | ISO 2424                  |
| Secondary backing                      | Polypropylene woven                 | ISO 2424                  |
| Pile fibre composition                 | BCF Polyamide 6.6                   | ISO 2424                  |
| Total thickness                        | 7.0 mm                              | 0.3 inch                  |
| Effective pile thickness               | 4.4 mm                              | 0.17 inch                 |
| Total mass                             | 2140 g/m <sup>2</sup>               | 63.2 oz/yd <sup>2</sup>   |
| Total pile mass                        | 830 g/m <sup>2</sup>                | 24.5 oz/yd <sup>2</sup>   |
| Effective pile mass                    | 580 g/m <sup>2</sup>                | 17.1 oz/yd <sup>2</sup>   |
| Pile density                           | 0.132 g/cm <sup>3</sup>             | 0.0048 lb/in <sup>3</sup> |
| Number of tufts                        | 2145 /dm <sup>2</sup>               | 179343 /yd <sup>2</sup>   |
| Stroll test                            | ≤ 2.0 kV                            | ISO 6356                  |
| Use classification                     | 32 Commercial - general use         | EN 1307                   |
| Impact sound reduction ΔL <sub>w</sub> | 25 dB                               | ISO 10140                 |
| Noise reduction                        | 0.20 a <sub>w</sub>                 | ISO 354                   |
| Flammability                           | C <sub>fl</sub> - s1 (glued tested) | EN 13501-1                |
| Light Reflectance Value (LRV)          | See right side page per colour      | BS 8493                   |
| Colour Depth (L)                       | See right side page per colour      | CIELAB                    |



**1510**  
L 71,11 / LRV 42,35

**1708**  
L 63,95 / LRV 32,74



**1960**  
L 57,61 / LRV 25,55

**2065**  
L 45,19 / LRV 14,68



**2098**  
L 36,40 / LRV 9,22

**2943**  
L 37,14 / LRV 9,61




**6021**  
L 43,28 / LRV 13,35

**8902**  
L 25,61 / LRV 4,62



**9115**  
L 54,31 / LRV 22,27

**9514**  
L 52,01 / LRV 20,15

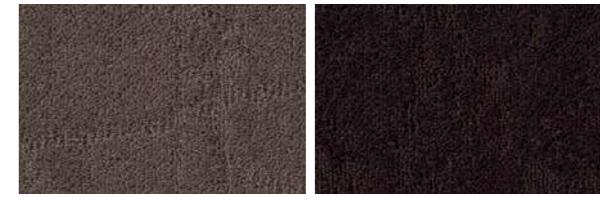

**9532**  
L 41,64 / LRV 12,27

**9850**  
L 25,17 / LRV 4,47





#### Preliminary specification according to EN 1307

|                        |   |             |
|------------------------|---|-------------|
| Type of manufacture    | Tufted 1/10 "   | ISO 2424    |
| Aspect                 | Structured loop pile  | ISO 2424    |
| Dye method             | Solution dyed   |             |
| Dimension              | Different dimensions in length x max. 400 cm in width                       |             |
| Primary backing        | Polyester fleece  | ISO 2424    |
| Secondary backing      | Felt backing with anti slip   | ISO 2424    |
| Pile fibre composition | BCF Polyamide 6 ECONYL®<br>(ECONYL® is made from 100% regenerated content)* | ISO 2424    |
| Total thickness        | 9.9 mm  | 0.4 inch    |
| Total mass             | 2650 g/m²   | 78.2 oz/yd² |
| Total pile mass        | 860 g/m²  | 25.4 oz/yd² |

\* ECONYL® is a yarn made from 100% regenerated content. The total % of regenerated content varies per product and per colour. Whether a colour contains ECONYL® and the exact % thereof can be found on our website: [www.tarkett.com](http://www.tarkett.com)




1324  
L 28,96 / LRV 5,82



5 colours blind band

Also available in carpet tile in 4 different colours




Manufactured by  
Tarkett BV  
PO Box 169  
NL-5240 AD  
Waalwijk  
EN 14041



#### Preliminary specification according to EN 1307

|  |   |            |
|--|---|------------|
| Type of manufacture                    | Tufted 1/10 "                                     | ISO 2424   |
| Aspect                                 | Cut pile  | ISO 2424   |
| Dye method                             | Piece dyed continuous                             |            |
| Width                                  | 400 cm / 13' 1"                                   |            |
| Primary backing                        | Polyester - polyamide fleece                      | ISO 2424   |
| Secondary backing                      | Polypropylene woven                               | ISO 2424   |
| Pile fibre composition                 | BCF Polyamide 6.6                                 | ISO 2424   |
| Total thickness                        | 7.5 mm 0.3 inch                                   | ISO 1765   |
| Effective pile thickness               | 5.0 mm 0.20 inch                                  | ISO 1766   |
| Total mass                             | 2250 g/m <sup>2</sup> 66.4 oz/yd <sup>2</sup>     | ISO 8543   |
| Total pile mass                        | 1100 g/m <sup>2</sup> 32.5 oz/yd <sup>2</sup>     | ISO 2424   |
| Effective pile mass                    | 845 g/m <sup>2</sup> 24.9 oz/yd <sup>2</sup>      | ISO 8543   |
| Pile density                           | 0.169 g/cm <sup>3</sup> 0.0061 lb/in <sup>3</sup> | ISO 8543   |
| Number of tufts                        | 1500 /dm <sup>2</sup> 125415 /yd <sup>2</sup>     | ISO 1763   |
| Stroll test                            | ≤ 2.0 kV  | ISO 6356   |
| Use classification                     | 33 Commercial - heavy use                         | EN 1307    |
| Impact sound reduction ΔL <sub>w</sub> | 27 dB   | ISO 10140  |
| Noise reduction                        | 0.20 α <sub>w</sub>                               | ISO 354    |
| Flammability                           | B <sub>f</sub> - s1 (glued tested)                | EN 13501-1 |
| Light Reflectance Value (LRV)          | See right side page per colour                    | BS 8493    |
| Colour Depth (L)                       | See right side page per colour                    | CIELAB     |

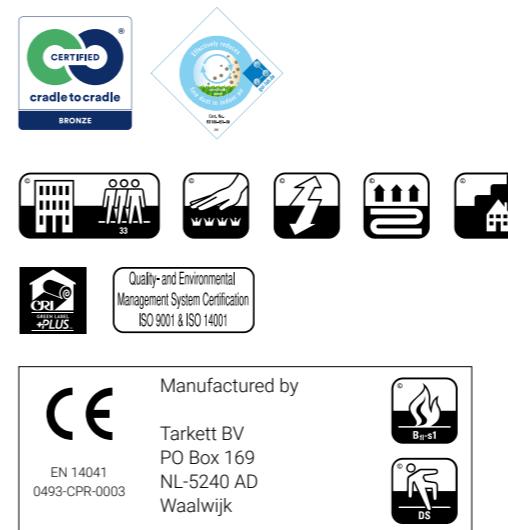

Manufactured by  
Tarkett BV  
PO Box 169  
NL-5240 AD  
Waalwijk






#### Preliminary specification according to EN 14215

|                        |   |             |
|------------------------|---|-------------|
| Type of manufacture    | Tufted 1/10 "   | ISO 2424    |
| Aspect                 | Structured loop pile  | ISO 2424    |
| Dye method             | Solution dyed   |             |
| Dimension              | Different dimensions in length x max. 400 cm in width                       |             |
| Primary backing        | Polyester fleece  | ISO 2424    |
| Secondary backing      | Felt backing with anti slip   | ISO 2424    |
| Pile fibre composition | BCF Polyamide 6 ECONYL®<br>(ECONYL® is made from 100% regenerated content)* | ISO 2424    |
| Total thickness        | 8.2 mm  | 0.3 inch    |
| Total mass             | 1890 g/m²   | 55.8 oz/yd² |
| Total pile mass        | 560 g/m²  | 16.5 oz/yd² |

\* ECONYL® is a yarn made from 100% regenerated content. The total % of regenerated content varies per product and per colour. Whether a colour contains ECONYL® and the exact % thereof can be found on our website: [www.tarkett.com](http://www.tarkett.com)

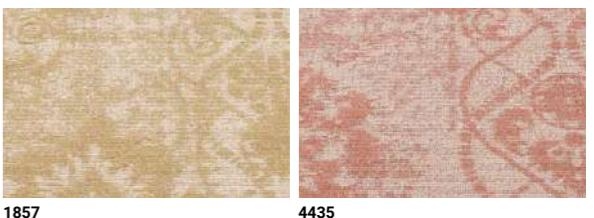

1857

4435




8311

8853



9511

9513

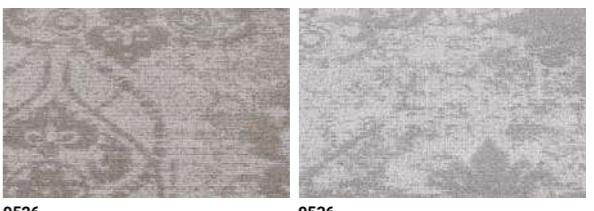

9526

9536





Manufactured by  
Tarkett BV  
PO Box 169  
NL-5240 AD  
Waalwijk  
EN 14041  
0493-CPR-0003





#### Preliminary specification according to EN 14215

|                        |   |                         |
|------------------------|---|-------------------------|
| Type of manufacture    | Tufted 1/10 "   | ISO 2424                |
| Aspect                 | Cut pile  | ISO 2424                |
| Dye method             | Print   |                         |
| Dimension              | Different dimensions in length x max. 400 cm in width |                         |
| Primary backing        | Polyester - polyamide fleece                          | ISO 2424                |
| Secondary backing      | Polypropylene woven                                   | ISO 2424                |
| Pile fibre composition | BCF Polyamide 6                                       | ISO 2424                |
| Total thickness        | 6.5 mm  | 0.3 inch                |
| Total mass             | 1930 g/m <sup>2</sup>                                 | 57.0 oz/yd <sup>2</sup> |
| Total pile mass        | 980 g/m <sup>2</sup>                                  | 28.9 oz/yd <sup>2</sup> |
|                        |   | ISO 1765                |
|                        |   | ISO 8543                |
|                        |   | ISO 2424                |

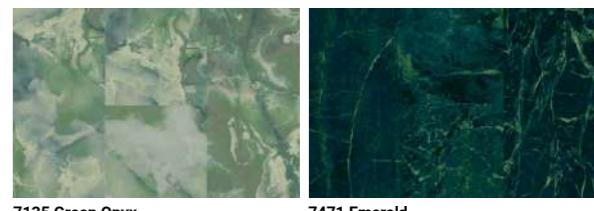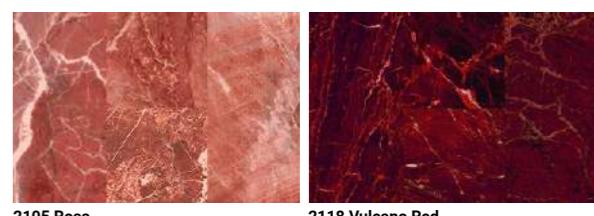

Quality-and Environmental  
Management System Certification  
ISO 9001 & ISO 14001



Manufactured by  
Tarkett BV  
PO Box 169  
NL-5240 AD  
Waalwijk





#### Preliminary specification according to EN 14215

|                        |   |             |
|------------------------|---|-------------|
| Type of manufacture    | Tufted 1/10 "   | ISO 2424    |
| Aspect                 | Structured loop pile  | ISO 2424    |
| Dye method             | Solution dyed   |             |
| Dimension              | Different dimensions in length x max. 400 cm in width                       |             |
| Primary backing        | Polyester fleece  | ISO 2424    |
| Secondary backing      | Felt backing with anti slip   | ISO 2424    |
| Pile fibre composition | BCF Polyamide 6 ECONYL®<br>(ECONYL® is made from 100% regenerated content)* | ISO 2424    |
| Total thickness        | 7.1 mm  | 0.3 inch    |
| Total mass             | 2015 g/m²   | 59.5 oz/yd² |
| Total pile mass        | 520 g/m²  | 15.3 oz/yd² |
|                        |   | ISO 1765    |
|                        |   | ISO 8543    |
|                        |   | ISO 2424    |

\* ECONYL® is a yarn made from 100% regenerated content. The total % of regenerated content varies per product and per colour. Whether a colour contains ECONYL® and the exact % thereof can be found on our website: [www.tarkett.com](http://www.tarkett.com)



Quality-and Environmental  
Management System Certification  
ISO 9001 & ISO 14001



Manufactured by  
Tarkett BV  
PO Box 169  
NL-5240 AD  
Waalwijk  
EN 14041  
0493-CPR-0003






#### Specification according to EN 1307

|  |   |            |
|--|---|------------|
| Type of manufacture                    | Tufted 1/10 "                                     | ISO 2424   |
| Aspect                                 | Cut pile  | ISO 2424   |
| Dye method                             | Piece dyed continuous                             |            |
| Width                                  | 400 cm / 13' 1"                                   |            |
| Primary backing                        | Polypropylene woven + fleece                      | ISO 2424   |
| Secondary backing                      | Polypropylene woven                               | ISO 2424   |
| Pile fibre composition                 | BCF Polyamide 6                                   | ISO 2424   |
| Total thickness                        | 6.5 mm 0.3 inch                                   | ISO 1765   |
| Effective pile thickness               | 4.0 mm 0.16 inch                                  | ISO 1766   |
| Total mass                             | 2070 g/m <sup>2</sup> 61.1 oz/yd <sup>2</sup>     | ISO 8543   |
| Total pile mass                        | 850 g/m <sup>2</sup> 25.1 oz/yd <sup>2</sup>      | ISO 2424   |
| Effective pile mass                    | 650 g/m <sup>2</sup> 19.2 oz/yd <sup>2</sup>      | ISO 8543   |
| Pile density                           | 0.163 g/cm <sup>3</sup> 0.0059 lb/in <sup>3</sup> | ISO 8543   |
| Number of tufts                        | 1930 /dm <sup>2</sup> 161367 /yd <sup>2</sup>     | ISO 1763   |
| Stroll test                            | ≤ 2.0 kV  | ISO 6356   |
| Use classification                     | 33 Commercial - heavy use                         | EN 1307    |
| Impact sound reduction ΔL <sub>w</sub> | 25 dB   | ISO 10140  |
| Noise reduction                        | 0.20 α <sub>w</sub>                               | ISO 354    |
| Flammability                           | B <sub>f</sub> - s1 (glued tested)                | EN 13501-1 |
| Light Reflectance Value (LRV)          | See right side page per colour                    | BS 8493    |
| Colour Depth (L)                       | See right side page per colour                    | CIELAB     |



2921 L 22,56 / LRV 3,67  
4301 L 27,35 / LRV 5,22

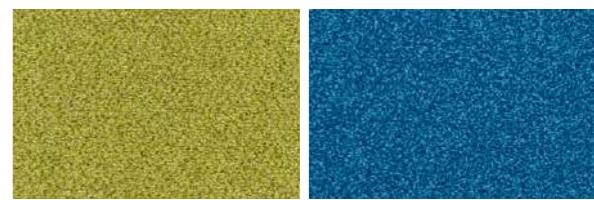

6204 L 57,00 / LRV 24,92  
8412 L 37,37 / LRV 9,74



8813 L 19,45 / LRV 2,85  
9012 L 18,88 / LRV 2,72



9022 L 23,16 / LRV 3,85  
9104 L 40,71 / LRV 11,68



9502 L 25,88 / LRV 4,71  
9533 L 35,10 / LRV 8,55



9975 L 38,67 / LRV 10,47

Also available in carpet tile in 60 different colours





Vintage Rug 118.202




## Preliminary specification according to EN 14215

|                        |   |                         |
|------------------------|---|-------------------------|
| Type of manufacture    | Tufted 1/10 "   | ISO 2424                |
| Aspect                 | Cut pile  | ISO 2424                |
| Dye method             | Print   |                         |
| Dimension              | Different dimensions in length x max. 400 cm in width |                         |
| Primary backing        | Polyester - polyamide fleece                          | ISO 2424                |
| Secondary backing      | Felt backing with anti-slip                           | ISO 2424                |
| Pile fibre composition | BCF Polyamide 6                                       | ISO 2424                |
| Total thickness        | 6.0 mm  | 0.2 inch                |
| Total mass             | 1830 g/m <sup>2</sup>                                 | 54.0 oz/yd <sup>2</sup> |
| Total pile mass        | 780 g/m <sup>2</sup>                                  | 23.0 oz/yd <sup>2</sup> |
|                        |   | ISO 1765                |
|                        |   | ISO 8543                |
|                        |   | ISO 2424                |



118.202

130.203

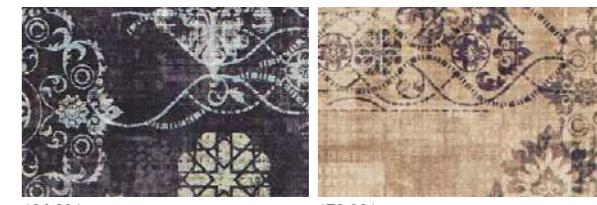

134.201

173.201



174.203

188.201



190.201

191.202



192.203

193.202

Quality-and Environmental  
Management System Certification  
ISO 9001 & ISO 14001



Manufactured by

Tarkett BV  
PO Box 169  
NL-5240 AD  
Waalwijk

EN 14041  
0493-CPR-0003

Use classification  
may vary with  
specific colours  
and/or designs

# Custom Made



Axminster

215 Gravure

217

▲

A

●

◎

□

i

□

□


DESSO Custom Made 213



#### Specification according to EN 1307

|                     |  |              |
|---------------------|--|--------------|
| Type of manufacture | Woven - Axminster                            | ISO 2424     |
| Aspect              | Cut pile                                     | ISO 2424     |
| Pile Fibre          | Hank dyed 80/20 wool/polyamide               | ISO 2424     |
| Width               | 400 cm / 13' 1.5"                            | CEN/TS 14159 |
| Primary backing     | Polypropylene weft /<br>Polyester-based warp | ISO 2424     |
| Secondary backing   | Copolymer                                    | ISO 2424     |


Please contact us for all options in pile weight, 2 or 3 ply yarn, rows, design and colour.

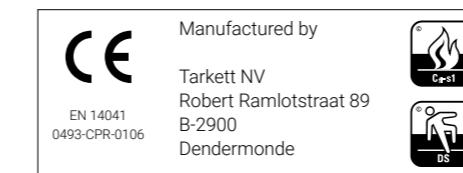



|                     |   |              |
|---------------------|---|--------------|
| Type of manufacture | Tufted 1/10"                                      | ISO 2424     |
| Aspect              | Cut pile  | ISO 2424     |
| Pile Fibre          | Print, 100% polyamide or 80/20<br>wool/ polyamide | ISO 2424     |
| Width               | 400 cm / 13' 1.5"                                 | CEN/TS 14159 |
| Primary backing     | Polyester fleece                                  | ISO 2424     |
| Secondary backing   | Felt backing 550g                                 | ISO 2424     |

Please contact us for all options in pile weight, design and colour.

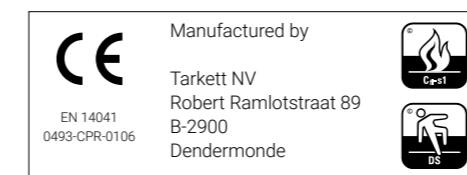


# Appendix



Installation and  
maintenance

Icons  
Disclaimer

223  
225

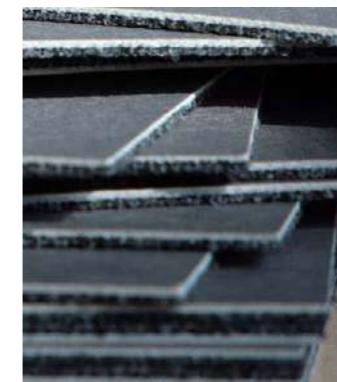


DESSO carpet and carpet tiles have been manufactured with the greatest care. Upon leaving our factory, you can rest assured that DESSO products meet all specifications described in the relevant product documentation. DESSO carpet and carpet tiles, however, only really come to life when installed. To ensure proper installation it is of vital importance that the installation instructions described by us are followed carefully. Only then can you ensure optimum results.

To be able to enjoy DESSO products to their full potential, proper maintenance is crucial.

Installation and maintenance instructions of all DESSO products can be found on [www.tarkett.com](http://www.tarkett.com), or with your local representative.

Should you have any additional questions on installation and maintenance of DESSO products, our Technical Services Department will be happy to help you.

|  |  |  |   |  |  |  |       |  |
|--|--|--|---|--|--|--|-------|--|
|  | Tiles  |  | Luxury Classification LC1                               |  | Cradle to Cradle® Bronze certificate   |  | € € € | Price range                              |
|  | Planks   |  | Luxury Classification LC2                               |  | Cradle to Cradle® Silver certificate   |  |       | Monolithic installation                  |
|  | Broadloom  |  | Luxury Classification LC3                               |  | Cradle to Cradle® Gold certificate   |  |       | Quarter turn installation                |
|  | Rugs   |  | Luxury Classification LC4                               |  | Yarn from Aquafil S.P.A.; a yarn made from 100% regenerated content                                  |  |       | Brick installation                       |
|  | Woven  |  | Luxury Classification LC5                               |  | GUI Gold plus logo - Indoor air quality certification  |  |       | Ashlar installation                      |
|  | Custom made  |  | Classification for use class 31 commercial moderate use |  | GUI Basic logo - Indoor air quality certification  |  |       | Random installation                      |
|  | DESSO EcoBase optional   |  | Classification for use class 32 commercial general use  |  | GUI Basic logo - Allergic  |  |       | Carre installation                       |
|  | DESSO SoundMaster® Options available   |  | Classification for use class 33 commercial heavy use    |  | Trilogy Yarn Concept - Desso engineered Indoor Air Quality construction (AirMaster®)                 |  |       | Planks 25 x 100 cm Herringbone one way   |
|  | Suitable for castor chair continuous use                                     |  |   |  | GUT – Environmental product label  |  |       | Planks 25 x 100 cm Herringbone multi way |
|  | Suitable for castor chair occasional use                                     |  |   |  | BRE - Environmental award label  |  |       | Planks 25 x 100 cm Ashlar one way        |
|  | Antistatic   |  |   |  | CRI - Green Label Plus   |  |       | Planks 25 x 100 cm Ashlar multi way      |
|  | Conductivity/static dissipative (<10 <sup>9</sup> Ohm/ <10 <sup>6</sup> Ohm) |  |   |  | NF-UPEC product certification for France (tiles only)  |  |       | Planks 25 x 100 cm Random one way        |
|  | Suitable for underfloor heating  |  |   |  | Certified company for Quality Management System ISO 9001 & Environmental Management System ISO 14001 |  |       | Slabs 50 x 100 cm Ashlar one way         |
|  | Stairs continuous use  |  |   |  | CE Mark - Applied Harmonized Standard  |  |       | Slabs 50 x 100 cm Ashlar multi way       |
|  | Stairs occasional use  |  |   |  |  |  |       | Slabs 50 x 100 cm Random one way         |
|  | Dimensional stability  |  |   |  |  |  |       | Slabs 50 x 100 cm Random multi way       |
|  | Slip resistance  |  |   |  |  |  |       | Slabs 50 x 100 cm Hexagons Random        |
|  | European flammability class B <sub>fl</sub> -s1                              |  |   |  |  |  |       |  |
|  | European flammability class C <sub>fl</sub> -s1                              |  |   |  |  |  |       |  |
|  | Contact sound reduction in dB  |  |   |  |  |  |       |  |

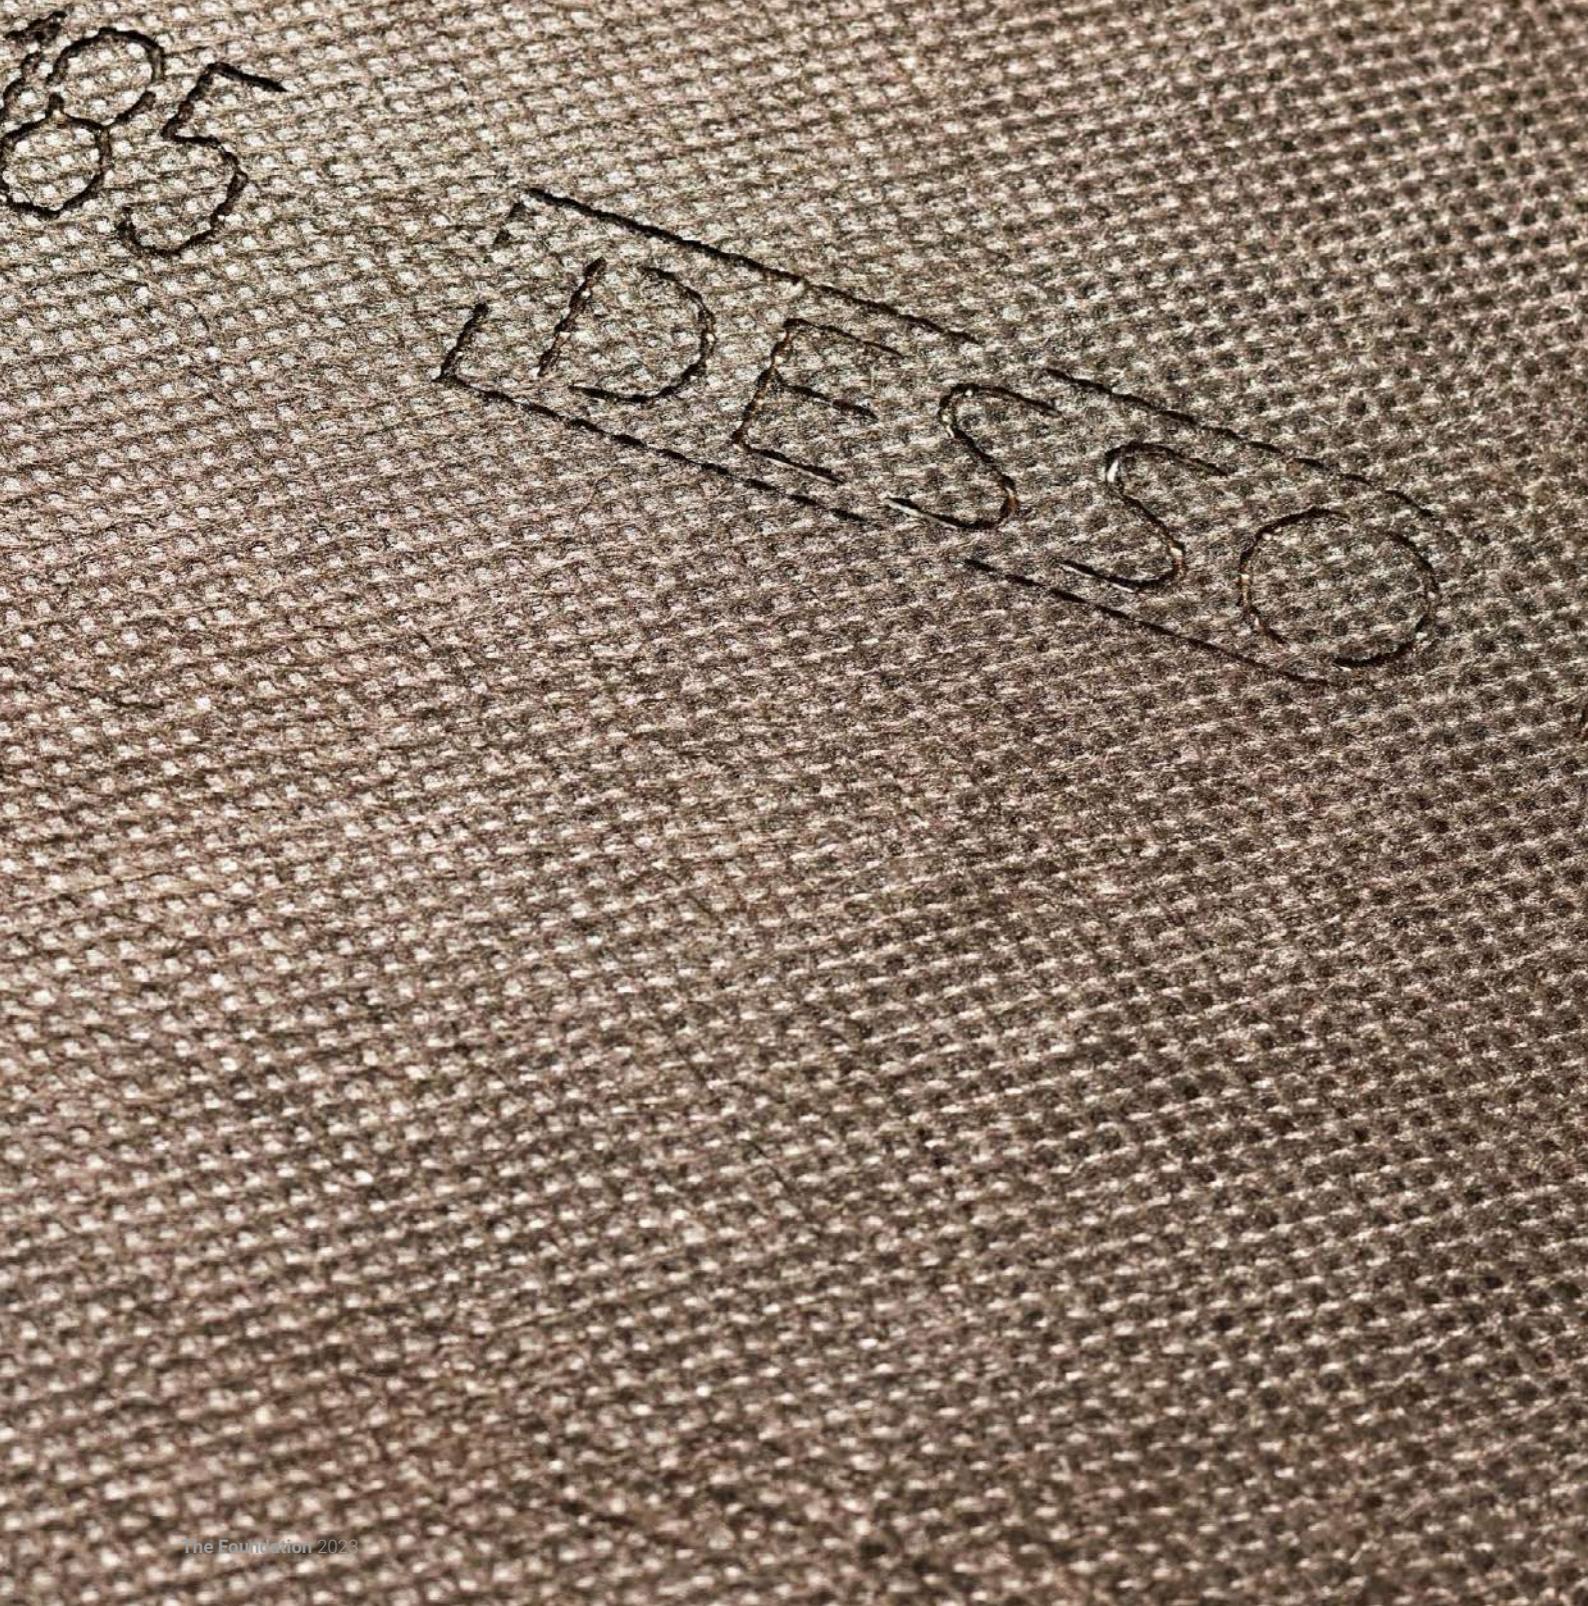


DESSO flooring products are to be installed in full accordance with Tarkett's installation instructions and recognized trade standards. An effective, regular cleaning and maintenance program is vital for retaining a high appearance level. DESSO flooring products should only be used as floorcoverings.

Note: Tarkett reserves the right to change this specification without prior notice; changes are subject to normal production tolerances. For the latest versions of the technical specifications, visit [www.tarkett.com](http://www.tarkett.com)

Descriptions, colours and specifications are subject to change without notice. Tarkett is not responsible for typographical/photographical errors. Actual product may differ from illustration. All rights reserved. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice. No liability will be accepted by the publisher for any consequence of its use. Publication thereof does not convey nor imply any license under patent- or other industrial or intellectual property rights. In case of doubt or differences of interpretation, the English version shall prevail over all other language versions.

© Tarkett, 2023





Tarkett B.V.  
P.O. Box 169  
5140 AD Waalwijk  
The Netherlands

T +31(0)416 684100  
[desso@tarkett.com](mailto:desso@tarkett.com)  
[www.tarkett.com](http://www.tarkett.com)

 **Tarkett**